
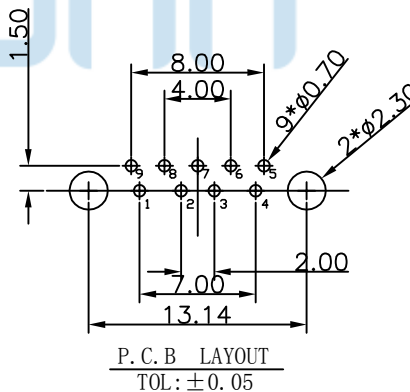

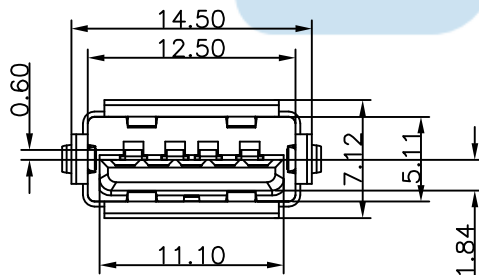
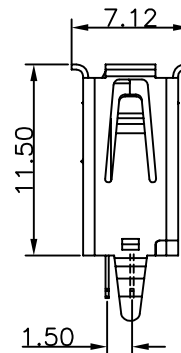
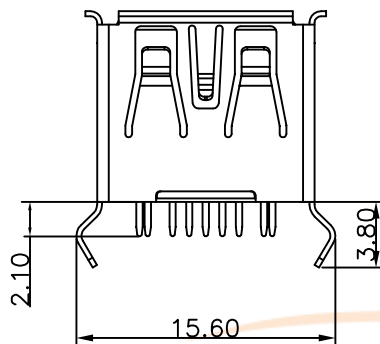


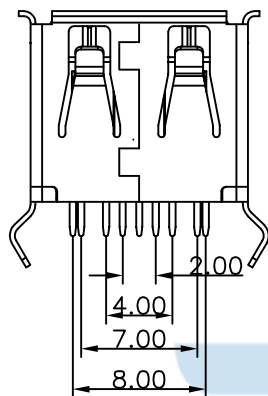

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

ED NOTE:

1. MATERIAL:

- 1.1 INSULATOR:PBT & PA9T & LCP
- 1.2 CONTACT:COPPER ALLOY
- 1.3 SHELL:Stainless Steel

2. ELECTRICAL CHARACTERISTICS:

- 2.1 CONTACTRESISTANCE:30mΩ MAXIMUM
- 2.2 CONTACT CURRENT RATING:1.5A
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE:100 V R. M. S.
- 2.4 INSULATION RESISTANCE 100 MEGOHMS MIN
- 2.5 OPERATING TEMPERATURE:-20° C ~ 60° C

3. PLATING

3.1 TERMINAL:

- 50u" MIN NICKEL ALL OVER
100u"MIN Tin ON SOLDER AREA
(1~30)u"Au ON CONTACT AREA

3.2 SHELL:80u"MIN. NICEL ALL OVER

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



TOLERANCES, UNLESS OTHERWISE SPECIFIED

- X. ±0.30
X.X ±0.20
X.XX ±0.15
X.XXX ±0.05
ANGEL ±1°

深圳市步步精科技有限公司

TITLE:

USB 3.0 AF 180度 弯脚 H=11.50 LCP蓝胶 卷边 不锈钢壳 电镀G/F DIP

DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART. NO: UB.03.11-33-W002
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0471-1	SHEET: 页码

