

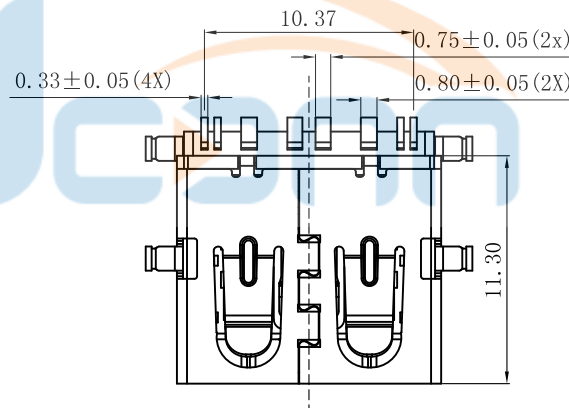
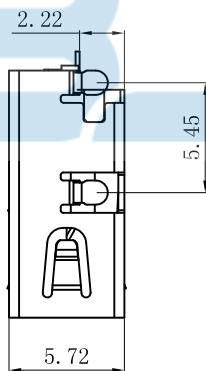


TOLERANCE: ± 0.05 , RECOMMENDED PCB LAYOUT
(TOP VIEW)

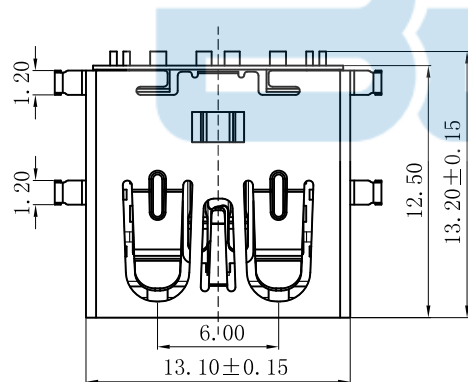

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	Stda_SSRX-
6	Stda_SSRX+
7	GND_DRAIN
8	Stda_SSTX-
9	Stda_SSTX+
Shield	Shield

TOLERANCE UNSPECIFIED

.0	± 0.35
.00	± 0.25
.000	± 0.15
X. °	$\pm 2.00^\circ$

CUSTOMER DRAWING

DRAWN/	设计	TSP
DATE		
CHECKED/	审核	LYX
DATE		
APPROVED/	核准	LJP
DATE		

深圳市步步精科技有限公司

TITLE: USB 3.0 AF 90度 L=12.50 沉板2.22 四脚插 端子SMT
平口 LCP蓝胶 不锈钢外壳 传输速度10Gbps

SIZE:A4	UNIT:MM.	PART.NO:	UB.03.32-13-W001
SCALE: 1:1	PROJECTION	REV.: 版本	
DWG. PATH	0540-1	SHEET: 页码	

NOTE:

1. MATERIAL:

1.1 INSULATOR:LCP+30%GF, UL94 V-0.

1.2 CONTACT 1~4PIN: C5191-EH.

1.3 CONTACT 5~9PIN: C5191-EH.

1.4 SHELL: SUS304 3/4H

2. PLATING:

2.1 CONTACT:

CONTACT AREA: GOLD PLATING.

SOLDER AREA: 100u" Min MATTE TIN PLATING.

UNDER PLATE: 50u" Min NICKEL PLATING.

2.2 SHELL:50u" Min. NICKEL PLATED OVERALL

3. CHARACTERISTICS:

3.1 ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE:30mΩ MAXIMUM

CONTACT CURRENT RATING: 3A

DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.

INSULATION RESISTANCE: 100 MEGOHMS MIN

OPERATING TEMPERATURE: -25° C ~ +85° C

3.2 MECHANICAL:

MATING FORCE: 8N-20N.

UNMATING FORCE: 8N-20N.






4. PART MUST COMPLY ROHS SPECIFICATION

5. WAVE SOLDER:THE CONNECTOR SHALL BE MOUNTED ON THE PCB.THE TEMPERATURE OF THE SOLDER SHALL BE 260±5 ° C AND IMMERSION DURATION 5 SECONDS.


③	SHELL	SUS304-3/4H	1	50u" Min. NICKEL PLATED OVERALL
②	CONTACT FOOT 1#	C5191-EH	9	GOLD PLATED ON CONTACT AREA
①	HOUSING	LCP (BLACK)/(BLUE)	1	UL94V-0
NO.	DESCRIPTION	MATERIAL	QTY.	REMARK



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

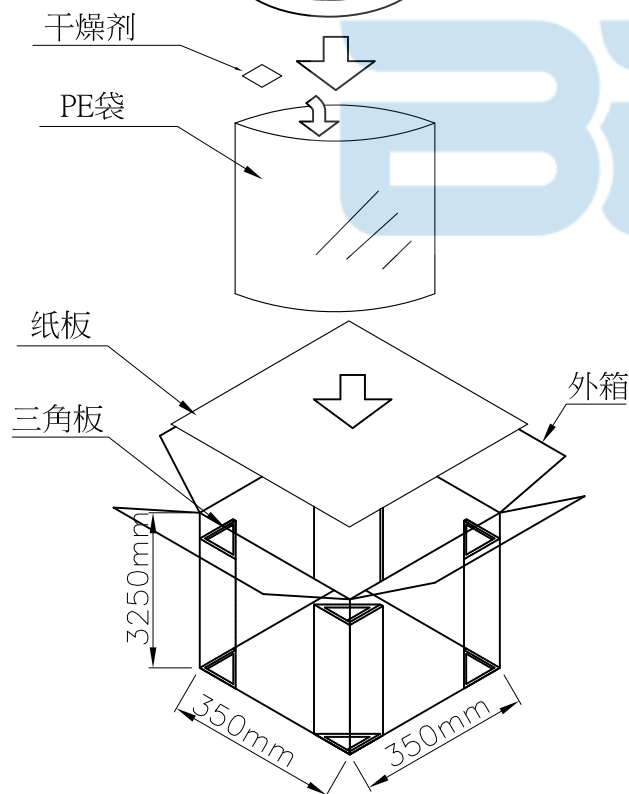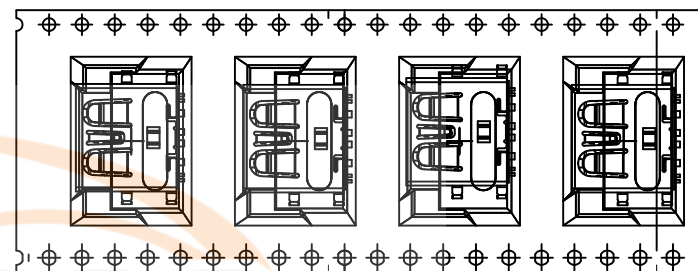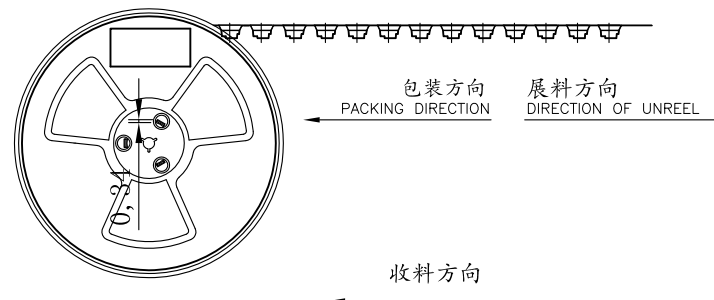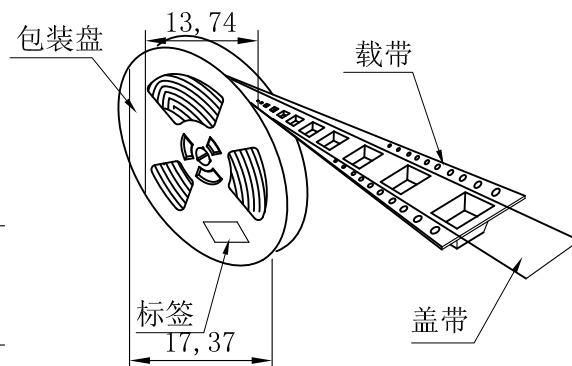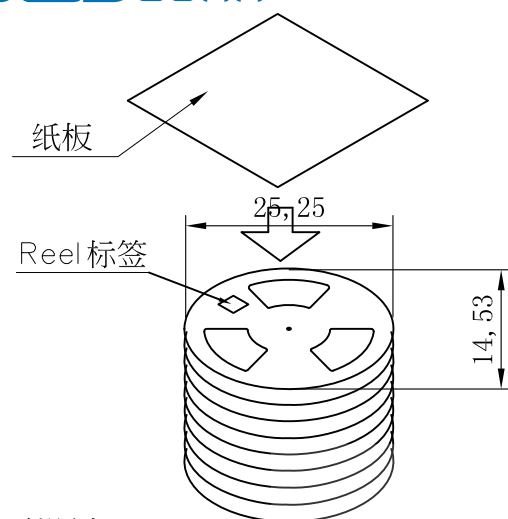



1. 外箱底部先垫一片纸板。
2. 外箱四个内角加入三角板支撑
3. 把8卷封好的产品平放进防水袋，并放入2包干燥剂,再一起平放进外箱。
4. 注意REEL之标签一律朝上
5. 接上一工站，上层放一片纸板
6. 标签贴于纸箱外侧右上方



SCALE 2:1



TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司			
.0	±0.35					
.00	±0.25					
.000	±0.15					
X.°	±2.00°					
CUSTOMER DRAWING			TITLE: USB 3.0 AF 90度 L=12.50 沉板2.22 四脚插 端子SMT 平口 LCP蓝胶 不锈钢外壳 传输速度10Gbps			
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART. NO: UB.03.32-13-W001	
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION		REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0540-1		SHEET: 页码