

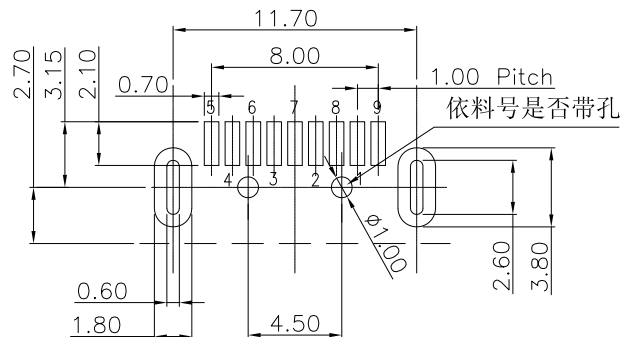




RECOMMENDED P.C.B LAYOUT

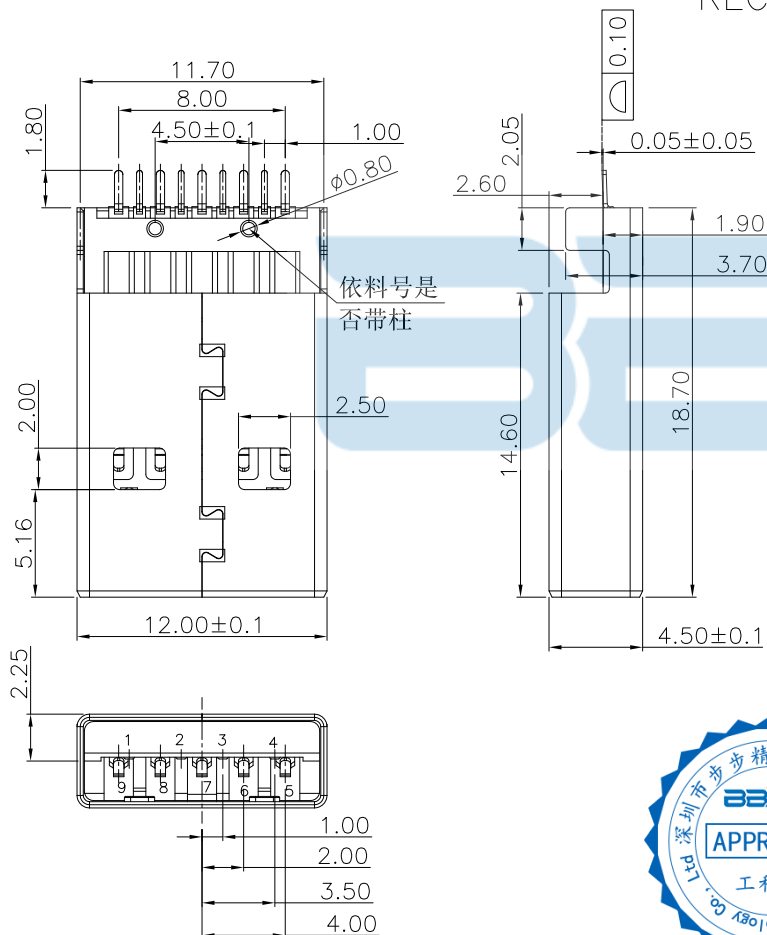

NOTE:

1. MATERIAL:

1.1 INSULATOR: LCP UL 94V-0

1.2 CONTACT: Copper alloy (T=0.20mm) PLATED Ni50u", Sn80u" Au1~30u"

1.3 SHELL: SPCC (T=0.30mm) PLATED NI50u" MIN.

2. ELECTRICAL CHARACTERISTICS:

2.1 CONTACT RESISTANCE: 30mΩ MAXIMUM

2.2 CONTACT CURRENT RATING: 1.5 AMPERES

2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V AC R.M.S.

2.4 INSULATION RESISTANCE: 100 MEGOHMS MIN


2.5 OPERATING TEMPERATURE: -40° C ~ 85° C

3. MECHANICAL CHARACTERISTICS:

3.1 MATING FORCE: 3.57kgf MAX

3.2 UNMATED FORCE: 1.02kgf MIN INITIAL/0.82kgf MIN

3.3 DURABILITY: 1,500 CYCLES

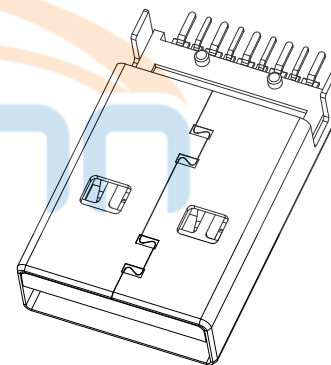

TOLERANCE UNSPECIFIED

.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°

CUSTOMER DRAWING



深圳市步步精科技有限公司

TITLE:

USB3.0 公头 L=18.70 沉板2.60 SMT 两脚插 平口 LCP蓝胶 铁壳

DRAWN/
DATE

设计 LYX

CHECKED/
DATE

审核 HMY

APPROVED/
DATE

核准 LJP

SIZE: A4

UNIT: MM.

SCALE: 1:1

PROJECTION

DWG. PATH


0540-1

PART. NO: UB.04.32-31-W001

REV.: A0

SHEET: 页码

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

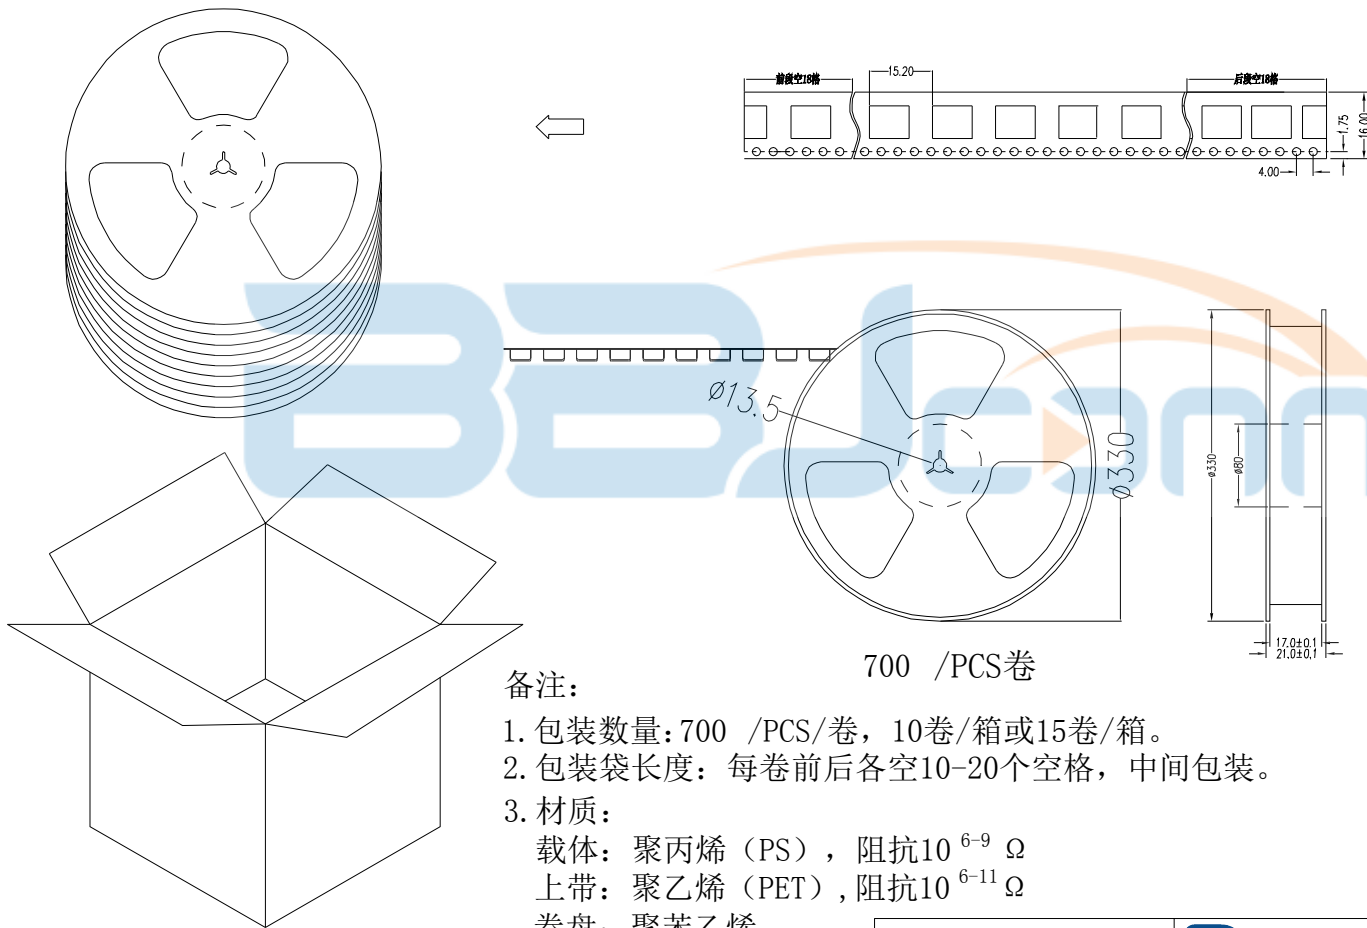

备注:

1. 包装数量:700 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS) , 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET) , 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司			
.0	±0.35				
.00	±0.25				
.000	±0.15				
X. "	±2.00"				
CUSTOMER DRAWING		TITLE: USB3.0 公头 L=18.70 沉板2.60 SMT 两脚插 平口 LCP蓝胶 铁壳			
DRAWN/ DATE	设计 LYX	SIZE:A4	UNIT:MM.	PART. NO: UB.04.32-31-W001	
CHECKED/ DATE	审核 HMY	SCALE: 1:1		PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0540-1		SHEET: 页码