
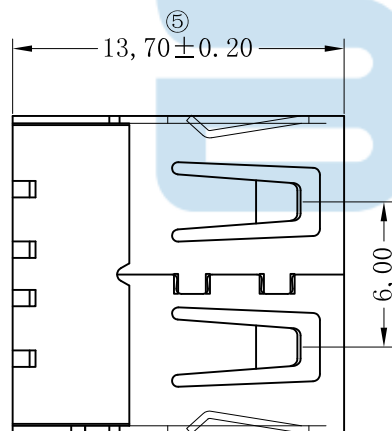
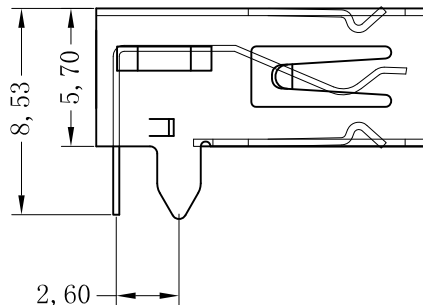


TOLERANCE UNSPECIFIED	
.0	±0.35
.00	±0.25
.000	±0.15
X.°	±2.00°
CUSTOMER DRAWING	
DRAWN/ DATE	设计 TSP
CHECKED/ DATE	审核 LYX
APPROVED/ DATE	核准 LJP

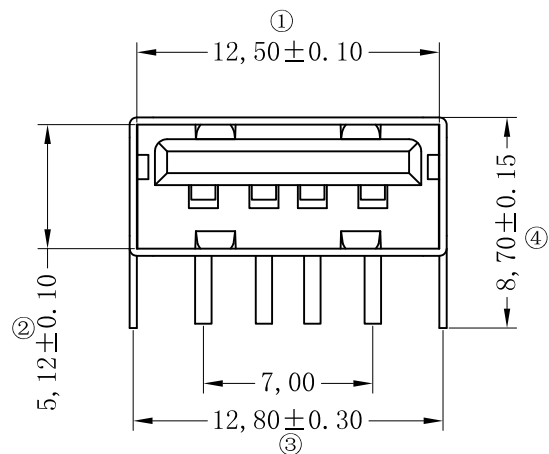

深圳市步步精科技有限公司

TITLE: USB 2.0 AF 90度 L=13.70 H=5.70 后两脚插
(端子DIP) 平口 PBT白色 铁壳 电流2A

SIZE:A4 UNIT:MM. PART.NO: UB.01.12-21-K001

SCALE: 1:1 PROJECTION  REV.: 版本

DWG. PATH 0242-2 SHEET: 页码

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

特性:

一、电气性能: ELECTRICAL

1. 额定电流: 2.0A
2. 接触阻抗: 30 MILLIOHMS MAX
3. 耐电压: 500V AC / 1 mA MAX
4. 绝缘阻抗: 100V DC/100 MEGA OHMS MIN

二、机械性能:

1. 插入力: 35N MAX
2. 拨出力: 10N MIN

三、材料: MATERIAL

1. 塑胶: LCP/PBT+30%G. F UL94V-0
2. 端子: C2680 T=0.23MM
3. 外壳: SPCC T=0.30MM

四、电镀: FINISH

1. 端子: 接触点镀金0.8U"MIN
PIN脚焊接区域镀亮锡100U"MIN.
2. 外壳: 镀镍80U"MIN

五、电镀品需做粘锡测试: 粘锡面积达到95%以上。

六、不能起泡、熔胶、变色不良 (变形在公差范围以内)

七、工作温度: -55° C~+85° C



