



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

注:

1. 机械性能:

插入力:35N Max.

拔出力:10N Min.

耐插拔:3000 次

工作温度:0℃~+50℃

储存温度:-20℃~60℃

2. 电性能:








额定电流:1.5A Max.

接触阻抗:30 mΩ Max.


耐高压:500V AC Min.

绝缘阻抗:1000 MΩ Min.

Recommend PCB layout

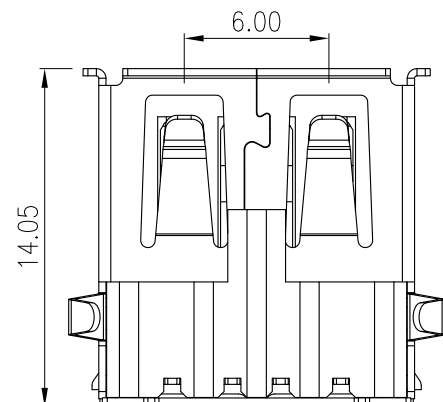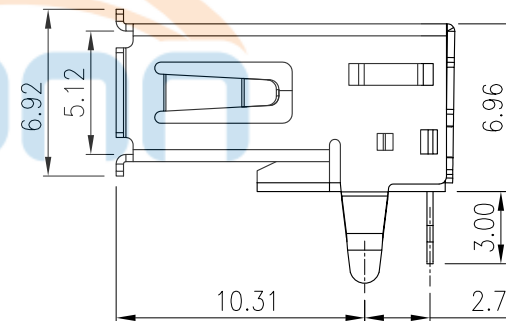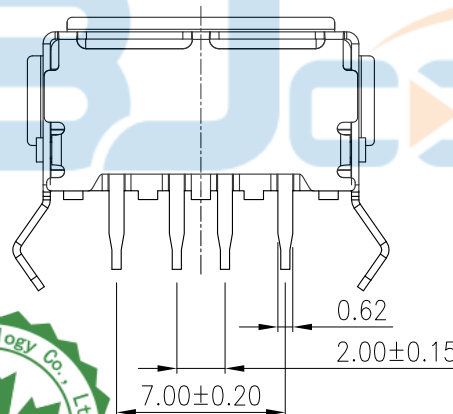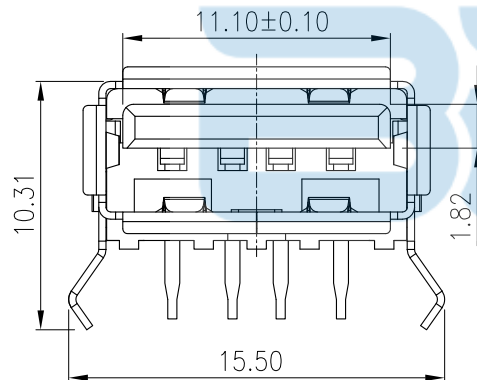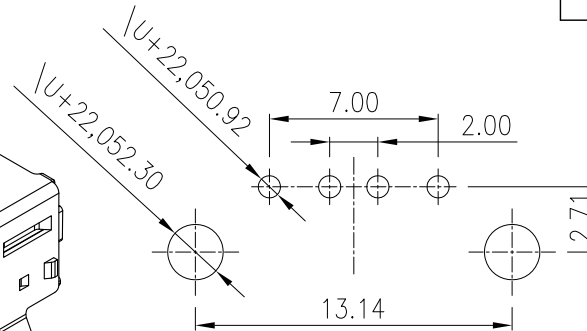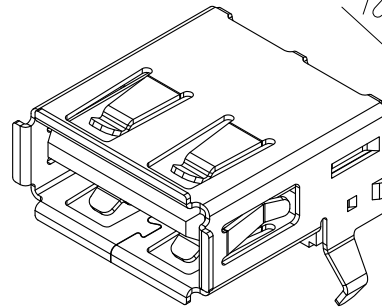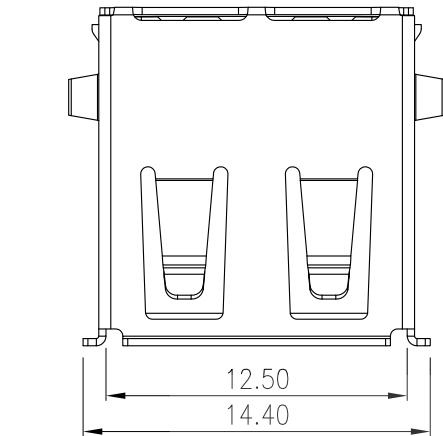

黑胶 (PBT) 铜	C2680, 镀镍80u"	PBT V0, 黑色	C2680-EH, T=0.25, 半金锡G/F
白胶 (PBT) 铜			
黑胶 (PBT) 铁	SPCC, 镀镍80u"	PBT V0, 白色	
白胶 (PBT) 铁			
规格	外壳 (1)	胶体 (2)	端子 (3)

TOLERANCE UNSPECIFIED			 深圳市步步精科技有限公司		
. X ±0.30 X. ° ±2° . XX ±0.25 . X° ±1° . XXX ±0.15 . XX° ±0.5°					
			TITLE: USB 2.0 AF 90度 L=14.05 H=6.96 后两脚插弯脚 DIP 卷边 PBT黑胶 铁壳		
DRAWN/ DATE	设计	HMY	SIZE:A4	UNIT:MM.	PART. NO: UB.01.11-11-V001
CHECKED/ DATE	审核	LYX	SCALE: 1:1		PROJECTION  REV. : 版本
APPROVED/ DATE	核准	LJP	DWG. PATH		0383-1 SHEET: 页码

