

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	


Notes:


1.Materials:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94 v-0.
- 1.2 Contact: copper alloy,t=0.15mm.
- 1.3 Shell: copper alloy,t=0.30mm.



2.Specifications:

- 2.1. Current rating: 1 A Max.
- 2.2. Dielectric withstanding:voltage: 100 V(ac) for 1 min.
- 2.3. Contact resistance: 50 mW Max.
- 2.4. Insulation resistance: 100 MW Min.
- 2.5. Total mating force: 3.57 Kg Max.
- 2.6. Total unmating force: 1.0 Kg Min.0.81~2.05 Kg Min.after 10000 insertion/extraction cycles
- 2.7. Temperature range: -30°C~+80°C

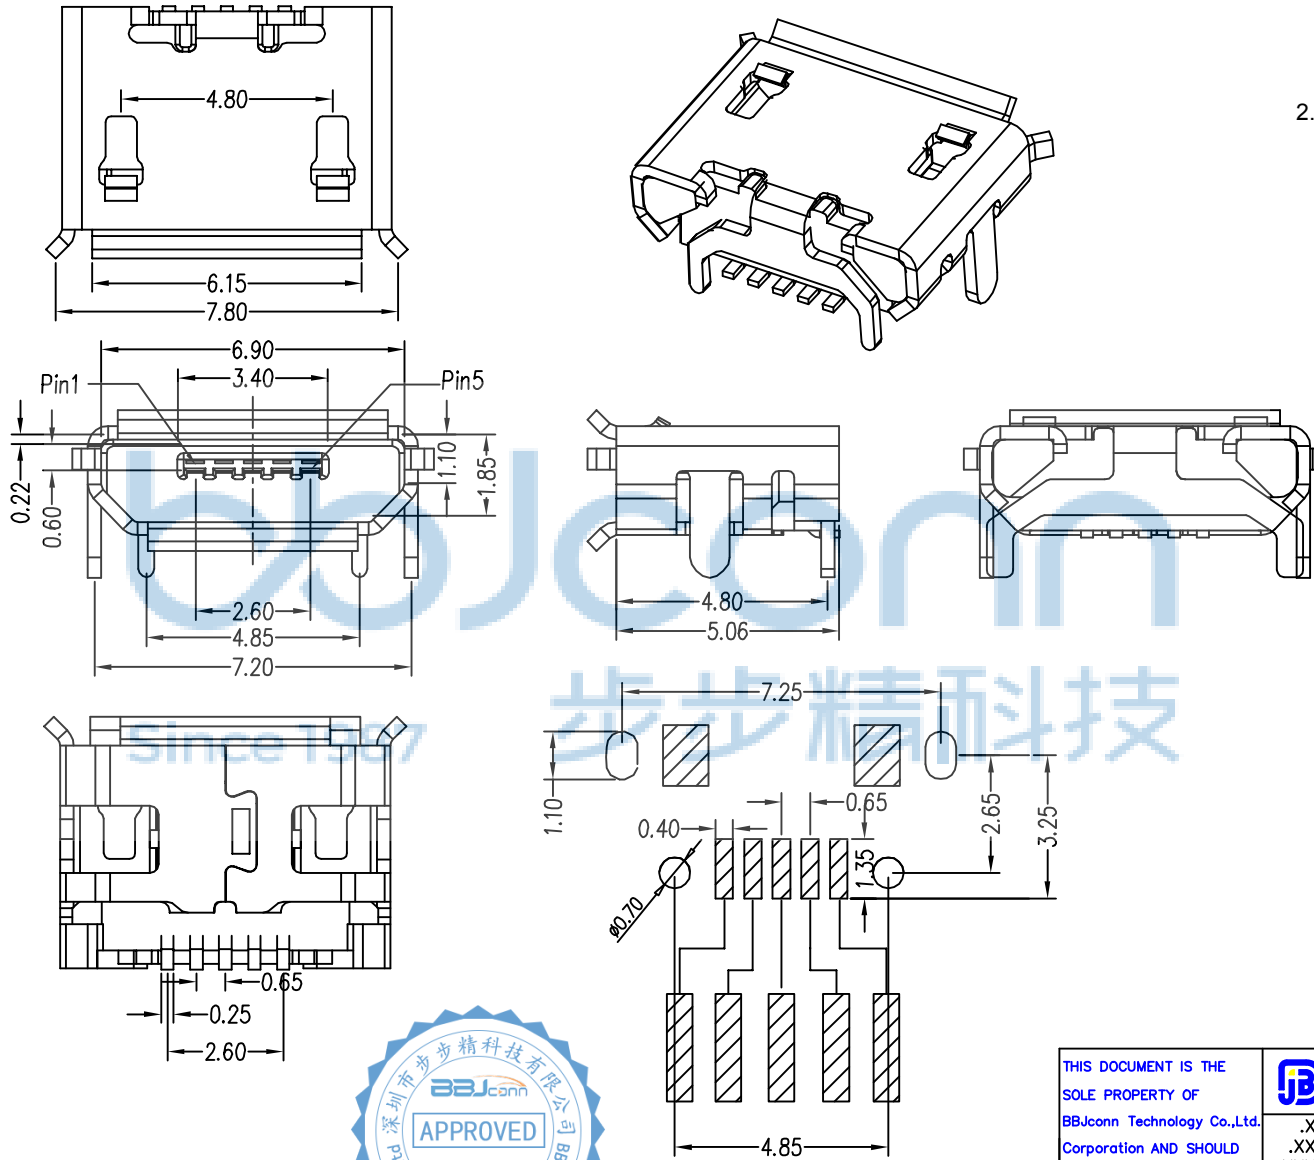

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
APPD.	JM_Zheng	23/05/02	NAME: MICRO USB 5P BF L=5.06 固定脚距7.2 小牛角4.85 卷边 铜壳 亮锡
CHKD.	LYX	23/05/02	PJ. NO.: MC.01.61-21-1001
DR.	SGF	23/05/02	SIZE: A4 DRW NO.:
PDWG.NO: 0113-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

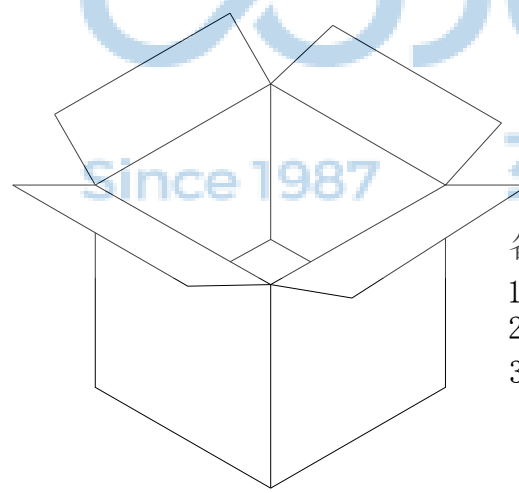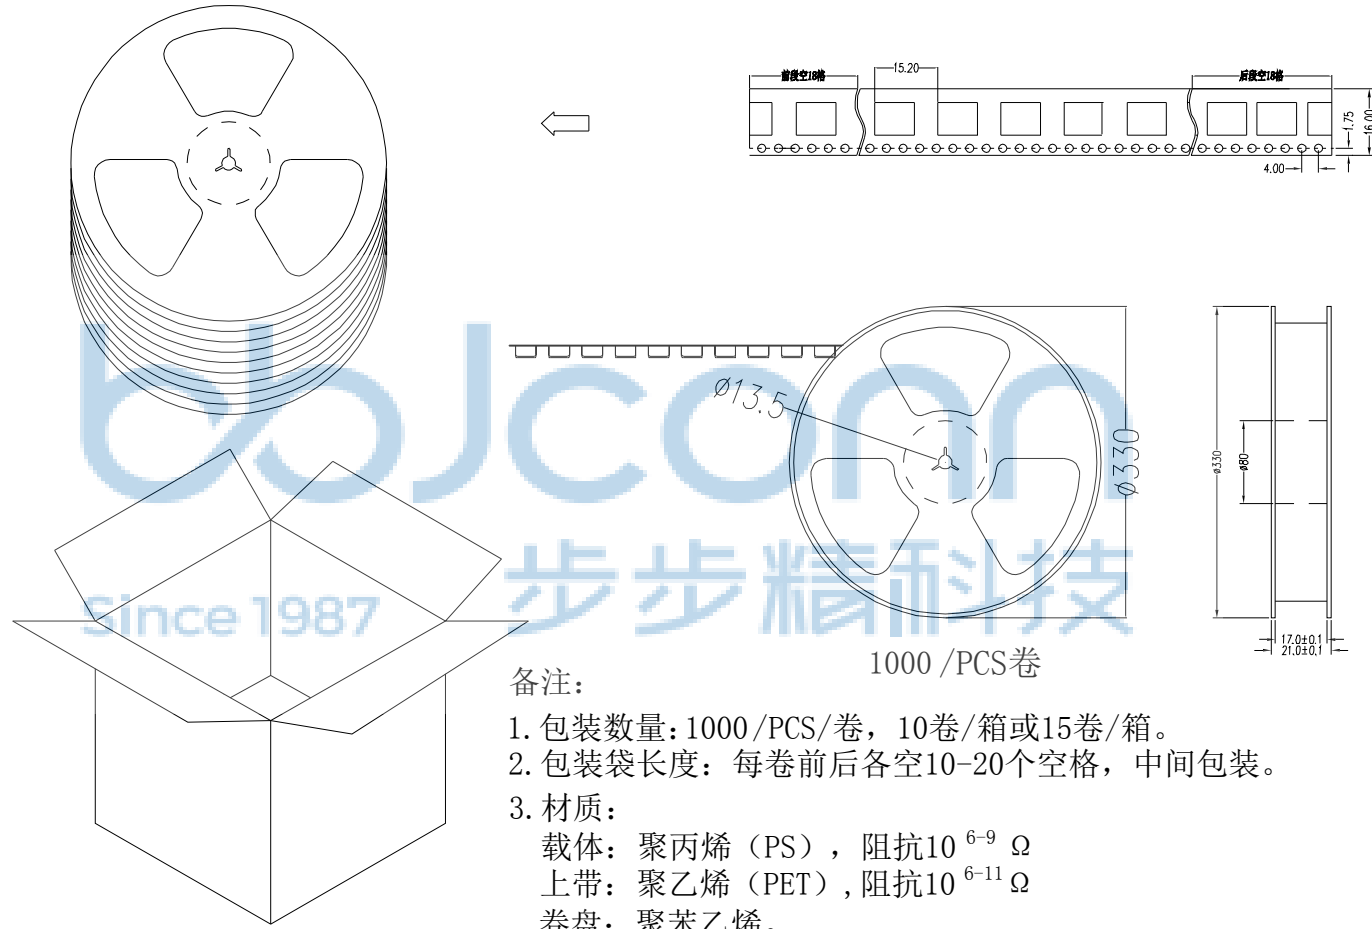

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM

1000 /PCS卷



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .XX': ±1"		NAME: MICRO USB 5P BF L=5.06 固定脚距7.2 小牛角4.85 卷边 铜壳 亮锡	
APPD.	JM_Zheng	23/05'02	PJ. NO.: MC.01.61-21-1001		
CHKD.	LYX	23/05'02	SIZE: A4 DRW NO.:		
PDWG.NO:	0113-1	DR.	SGF	23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1