


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	




1. 产品规格:
- 1-1. 插入力: 35N MAX.
  - 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER life test
  - 1-3. 额定电流: 1.0A
  - 1-4. 额定电压: 30V
  - 1-5. 耐久性: 3000 CYCLES MIN.
  - 1-6. 耐电压: 100V AC MIN.
  - 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER life test.
  - 1-8. 绝缘电阻: 100MΩ MIN
  - 1-9. 工作温度: -30° C TO +80° C
2. 材质:
- 2.1 胶芯: LCP UL94V-0 Black
  - 2.2 端子: C5191, 镍底, 接触功能区镀金1μ" 焊接Pin脚镀金G/F
  - 2.3 外壳: SUS304 镀镍 50 u" Min.

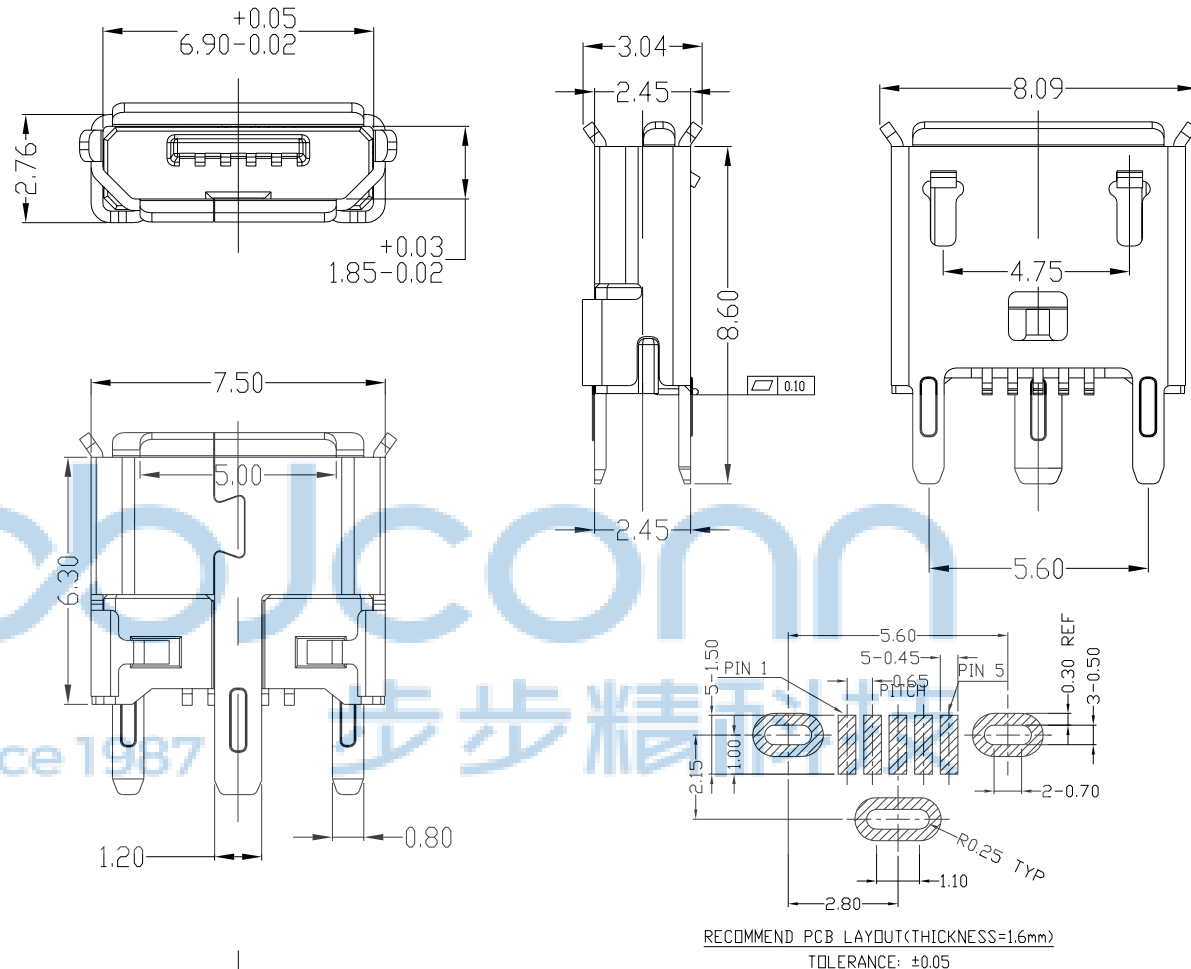

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .X': ±3" .XX: ±0.25    .X': ±2" .XXX: ±0.13    .XX': ±1"	
APPD.	JM_Zheng	23/05'02	NAME: MICRO-5P 母座 180度 H=6.30 三脚插 卷边 不锈钢壳 SMT
CHKD.	LYX	23/05'02	PJ. NO.: MC.01.C1-21-1003 SIZE: A4 DRW NO.:
DR.	SGF	23/05'02	FINISH: SEE NOTES    MAT'L.: SEE NOTES
PDWG.NO: 0113-1		SCALE: N/A	REV.: A3    UNIT: mm    PAGE: 1/1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

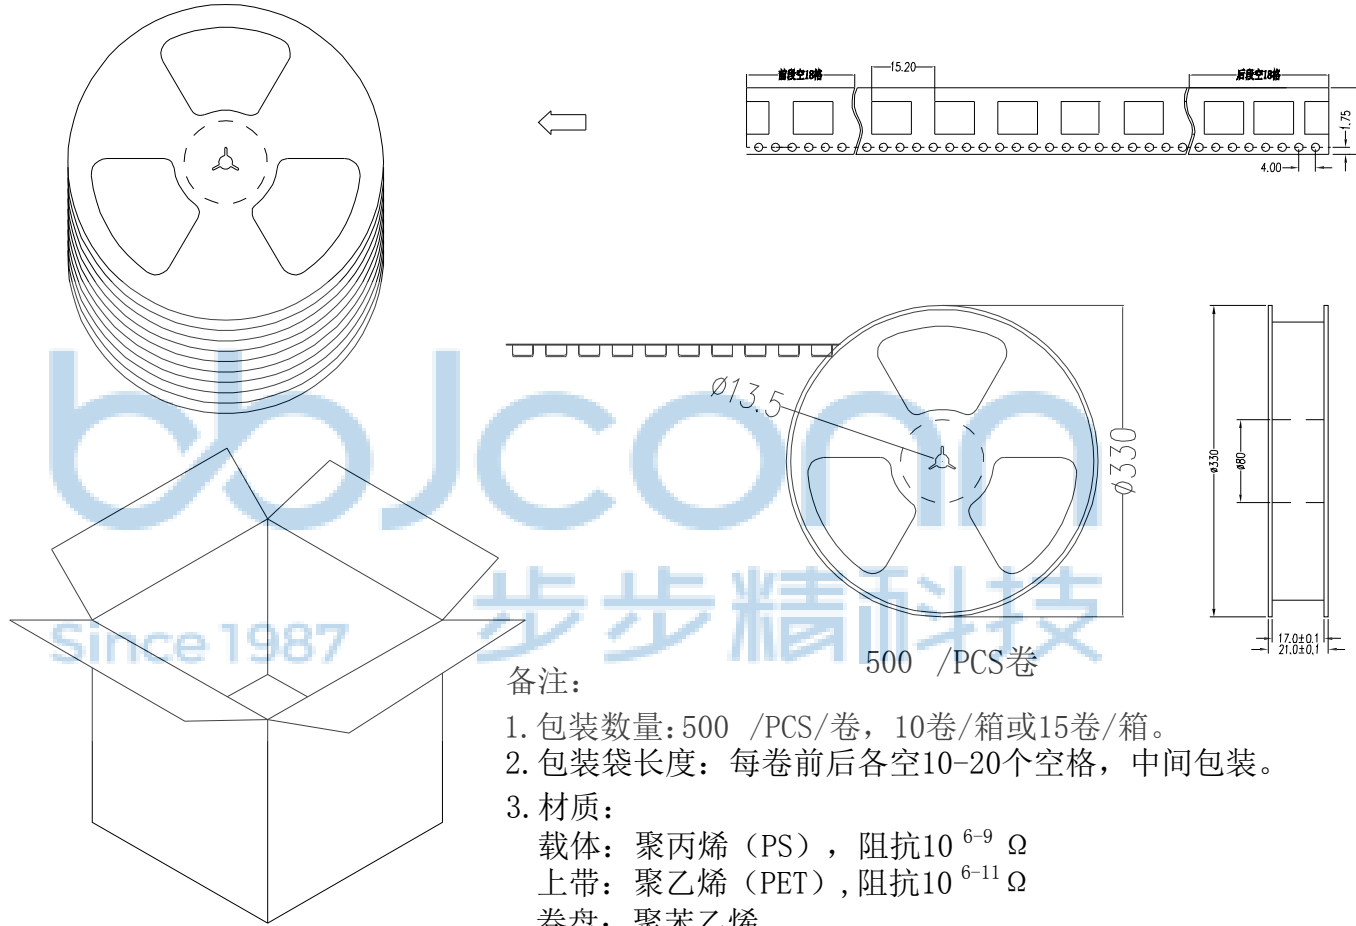

备注:

1. 包装数量: 500 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .X': ±3" .XX: ±0.25    .X'': ±2" .XXX: ±0.13    .XX': ±1"		NAME: MICRO-5P 母座 180度 H=6.30 三脚插 卷边 不锈钢壳 SMT	
APPD.	JM_Zheng	23/05'02	PJ. NO.: MC.01.C1-21-1003 SIZE: A4   DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES    MAT'L.: SEE NOTES		
PDWG.NO:	0113-1	DR.	SGF	23/05'02	SCALE: N/A    REV.: A3    UNIT: mm    PAGE: 1/1