



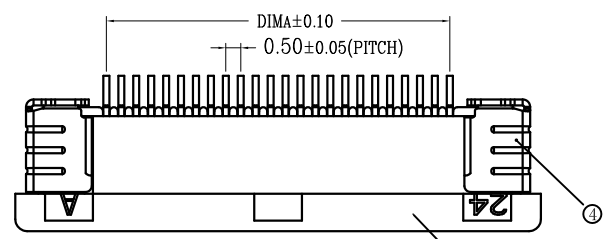
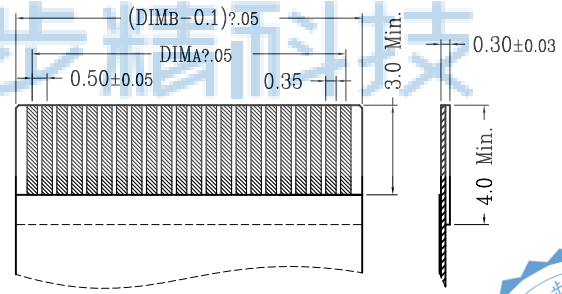
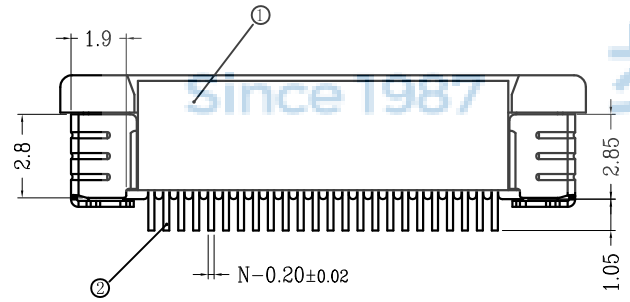


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

技术指标 (Technical Index):
 1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
 (The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
 2. 温度范围 (Temperature range): -25° C ~ +85° C.
 3. 额定电压 (Rated voltage): 50V, AC/DC (=等效).
 4. 接触电阻 (Contact resistance): ≤ 0.03Ω.
 5. 绝缘电阻 (Insulation resistance): ≥ 500MΩ.
 6. 产品料号 (Product material No.):




SECTION A-A

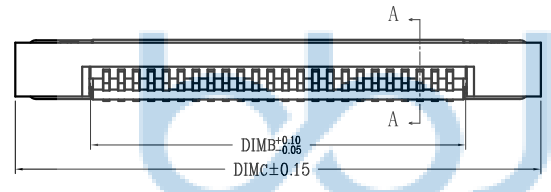

适用扁平线 (Applicable Flat Cable)

CKT	DIM A	DIM B	DIM C	DIM D	CKT	DIM A	DIM B	DIM C	DIM D
4	1.50	2.56	7.60		33	16.00	17.06	22.10	5.20
5	2.00	3.06	8.10		34	16.50	17.56	22.60	
6	2.50	3.56	8.60		35	17.00	18.06	23.10	
7	3.00	4.06	9.10		36	17.50	18.56	23.60	
8	3.50	4.56	9.60		37	18.00	19.06	24.10	
9	4.00	5.06	10.10		38	18.50	19.56	24.60	
10	4.50	5.56	10.60		39	19.00	20.06	25.10	
11	5.00	6.06	11.10		40	19.50	20.56	25.60	
12	5.50	6.56	11.60		41	20.00	21.06	26.10	
13	6.00	7.06	12.10		42	20.50	21.56	26.60	
14	6.50	7.56	12.60		43	21.00	22.06	27.10	
15	7.00	8.06	13.10		44	21.50	22.56	27.60	
16	7.50	8.56	13.60		45	22.00	23.06	28.10	
17	8.00	9.06	14.10		46	22.50	23.56	28.60	
18	8.50	9.56	14.60		47	23.00	24.06	29.10	
19	9.00	10.06	15.10		48	23.50	24.56	29.60	5.75
20	9.50	10.56	15.60		49	24.00	25.06	30.10	
21	10.00	11.06	16.10		50	24.50	25.56	30.60	
22	10.50	11.56	16.60		51	25.00	26.06	31.10	
23	11.00	12.06	17.10		52	25.50	26.56	31.60	
24	11.50	12.56	17.60		53	26.00	27.06	32.10	
25	12.00	13.06	18.10		54	26.50	27.56	32.60	
26	12.50	13.56	18.60		55	27.00	28.06	33.10	
27	13.00	14.06	19.10		56	27.50	28.56	33.60	
28	13.50	14.56	19.60		57	28.00	29.06	34.10	
29	14.00	15.06	20.10		58	28.50	29.56	34.60	
30	14.50	15.56	20.60		59	29.00	30.06	35.10	
31	15.00	16.06	21.10		60	29.50	30.56	35.60	
32	15.50	16.56	21.60						

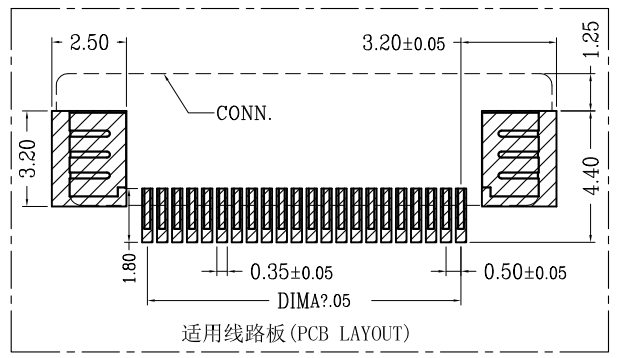

适用线路板 (PCB LAYOUT)

序号 No.	品名 Name	材质 Material
①	0.5 拉拔 3 代胶芯 (H2.0) 0.5 Pitch ZIF Type 3 Housing (H=2.0)	LCP UL94V-0 本色 Natural
②	0.5 拉拔 下接端子 (H2.0) 0.5 Pitch H2.0 ZIF R/A Type Under terminal	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5 拉拔 3 代后盖 (H2.0) 0.5 Pitch ZIF Type 3 Actuator (H=2.0)	LCP UL94V-0 黑色 Black
④	0.5 拉拔 3 代垫片 (H2.0) 0.5 Pitch ZIF Type 3 Fitting Nail (H=2.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG. NO: 0456-1

DR. SGF

APPD. JM_Zheng

CHKD. LYX

APPROVED

深圳市步步精科技有限公司

工程 部

NAME: FPC 0.5-6P 抽拉下接 H=2.0


PJ. NO.: PC.02.02-32-F001

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES



SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				


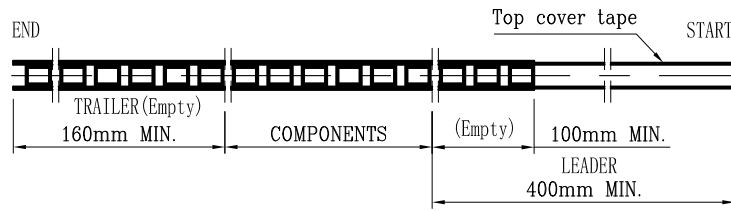


NOTE (注):

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$. (10片孔距累积公差 $\pm 0.2\text{mm}$.)
2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm. (载带拱/弧形MAX: 1/100mm.)
3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS. (所有的尺寸要满足协会EIA-481规范.)
4. MATERIAL: BLACK ANTISTATIC PS. (载带材料: 黑色防静电PS.)
5. THICKNESS: $0.30 \pm 0.05\text{mm}$. (载带厚度: $0.30 \pm 0.05\text{mm}$.)
6. PACKING LENGHT PER REEL: 25 METERS. (每卷包装长度: 25米.)
7. COMPONENT LOAD PER REEL: 2000 PCS. (每卷包装数量: 2000只, 前后各空包24只.)
8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充.
9. 纸箱分小、中、标准型3种规格型号; 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

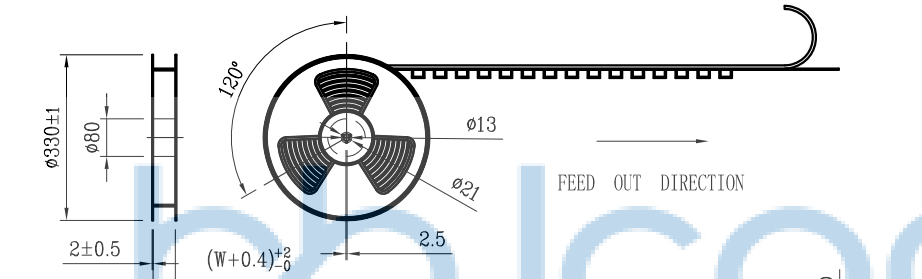

纸箱型号 Carton Type	小型 Small Size	中型 Medium	标准型 Standard
高度 Height (CM)	7.5	15	32

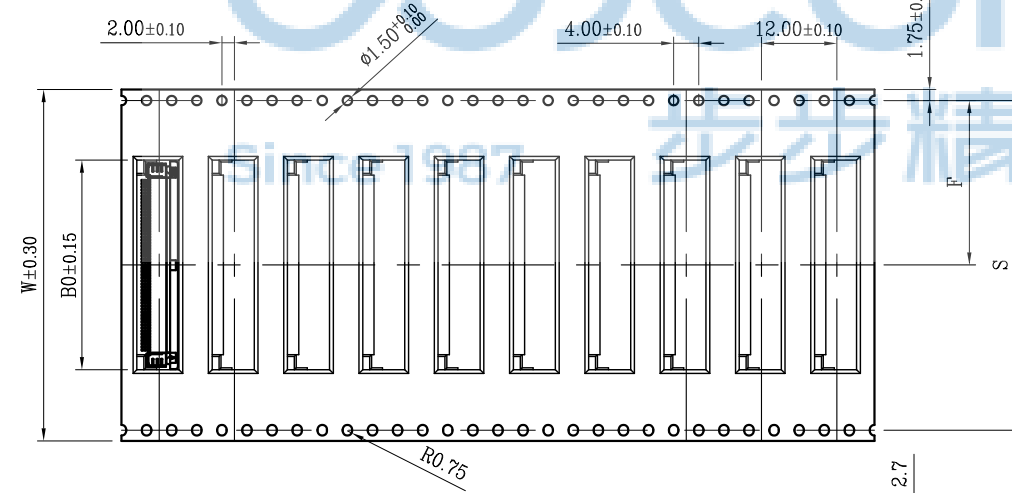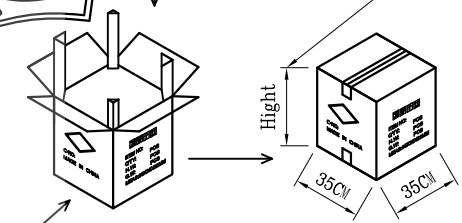

CKT (0.5mm pitch)	PCS/BELL	BELL/CARTON	SUM(PCS)	CKT (0.5mm pitch)	PCS/BELL	BELL/CARTON	SUM(PCS)
23	2000	8	16000	42	2000	6	12000
24	2000	8	16000	43	2000	6	12000
25	2000	8	16000	44	2000	6	12000
26	2000	8	16000	45	2000	6	12000
27	2000	8	16000	46	2000	6	12000
28	2000	8	16000	47	2000	6	12000
29	2000	8	16000	48	2000	6	12000
30	2000	8	16000	49	2000	6	12000
31	2000	6	12000	50	2000	6	12000
32	2000	6	12000	51	2000	6	12000
33	2000	6	12000	52	2000	6	12000
34	2000	6	12000	53	2000	6	12000
35	2000	6	12000	54	2000	6	12000
36	2000	6	12000	55	2000	5	10000
37	2000	6	12000	56	2000	5	10000
38	2000	6	12000	57	2000	5	10000
39	2000	6	12000	58	2000	5	10000
40	2000	6	12000	59	2000	5	10000
41	2000	6	12000	60	2000	5	10000



CKT (0.5mm pitch)	ID	W	F	S
23	17.00			
24	17.00			
25	18.00			
26	18.00	32	14.30±0.10	28.50
27	19.00			
28	19.00			
29	20.00			
30	20.00			
31	21.00			
32	21.00			
33	22.00			
34	22.00			
35	23.00			
36	23.00			
37	24.00			
38	24.00			
39	25.00			
40	25.00			
41	26.00			
42	26.00	44	20.30±0.15	40.55
43	27.00			
44	27.00			
45	28.00			
46	28.00			
47	29.00			
48	29.00			
49	30.00			
50	30.00			
51	31.00			
52	31.00			
53	32.00			
54	32.00			
55	33.00			
56	33.00	56	26.30±0.15	52.55
57	34.00			
58	34.00			
59	35.00			
60	35.00			

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0456-1

DR. SGF

深圳市步步精科技有限公司

NAME: FPC 0.5-6P 抽拉下接 H=2.0

PJ. NO.: PC.02.02-32-F001

SIZE: A4 | DRW NO.:

FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A0 | UNIT: mm | PAGE: 2/2