








REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

技术指标:


1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 。
3. 额定电压: 50V, AC/DC(等效)。
4. 接触电阻:  $\leq 0.03\text{m}\Omega$ 。
5. 绝缘电阻:  $\geq 500\text{M}\Omega$ 。



CKT	A	B	C	CKT	A	B	C
4	1.5	2.6	5.0	33	16.0	17.1	19.5
5	2.0	3.1	5.5	34	16.5	17.6	20.0
6	2.5	3.6	6.0	35	17.0	18.1	20.5
7	3.0	4.1	6.5	36	17.5	18.6	21.0
8	3.5	4.6	7.0	37	18.0	19.1	21.5
9	4.0	5.1	7.5	38	18.5	19.6	22.0
10	4.5	5.6	8.0	39	19.0	20.1	22.5
11	5.0	6.1	8.5	40	19.5	20.6	23.0
12	5.5	6.6	9.0	41	20.0	21.1	23.5
13	6.0	7.1	9.5	42	20.5	21.6	24.0
14	6.5	7.6	10.0	43	21.0	22.1	24.5
15	7.0	8.1	10.5	44	21.5	22.6	25.0
16	7.5	8.6	11.0	45	22.0	23.1	25.5
17	8.0	9.1	11.5	46	22.5	23.6	26.0
18	8.5	9.6	12.0	47	23.0	24.1	26.5
19	9.0	10.1	12.5	48	23.5	24.6	27.0
20	9.5	10.6	13.0	49	24.0	25.1	27.5
21	10.0	11.1	13.5	50	24.5	25.6	28.0
22	10.5	11.6	14.0	51	25.0	26.1	28.5
23	11.0	12.1	14.5	52	25.5	26.6	29.0
24	11.5	12.6	15.0	53	26.0	27.1	29.5
25	12.0	13.1	15.5	54	26.5	27.6	30.0
26	12.5	13.6	16.0	55	27.0	28.1	30.5
27	13.0	14.1	16.5	56	27.5	28.6	31.0
28	13.5	14.6	17.0	57	28.0	29.1	31.5
29	14.0	15.1	17.5	58	28.5	29.6	32.0
30	14.5	15.6	18.0	59	29.0	30.1	32.5
31	15.0	16.1	18.5	60	29.5	30.6	33.0
32	15.5	16.6	19.0				

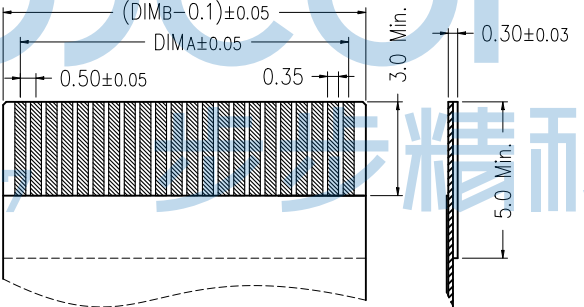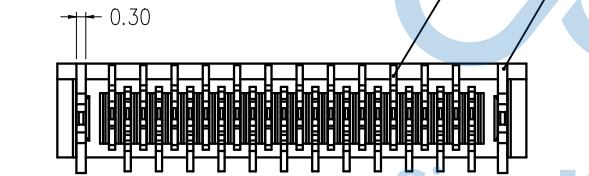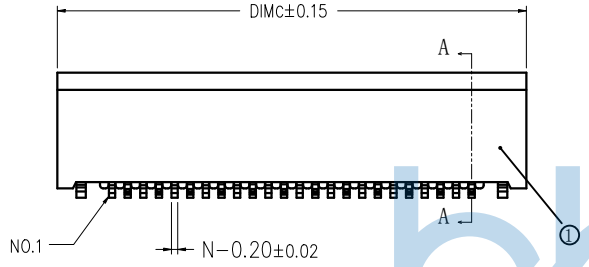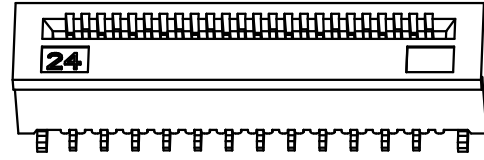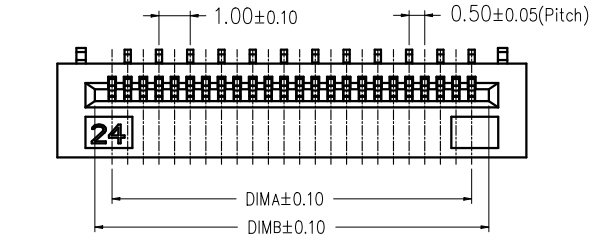

适用扁平线 (Applicable Flat Cable)

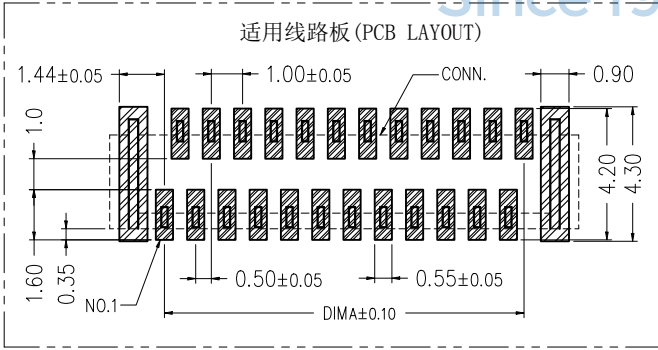

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0456-1

DR. TSP

APPD. JM\_Zheng

CHKD. LYX

NAME: FPC 0.5-14P 正位立贴 H=4.0 无盖

PJ. NO.: PC.02.03-42-F001





SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

序号	品名	材质
①	0.5无盖立式胶芯	LCP UL94V-0 本色
②	0.5无盖立式端子	铜合金/表面镀锡
③	0.5无盖立式焊片	铜合金/表面镀锡

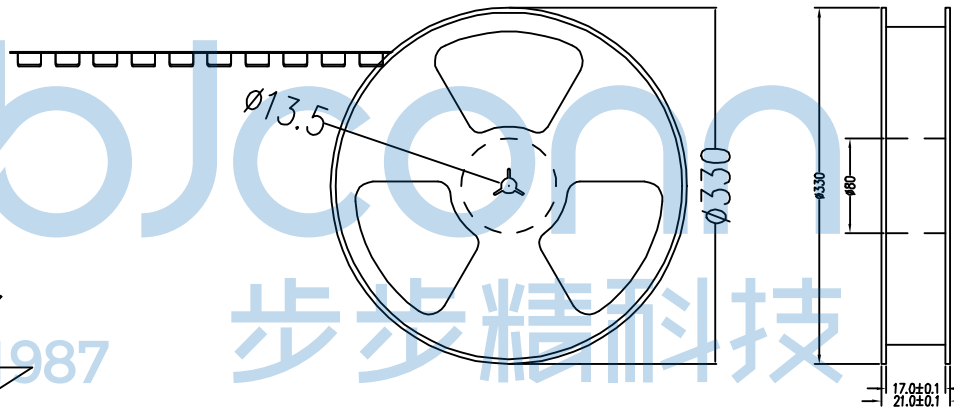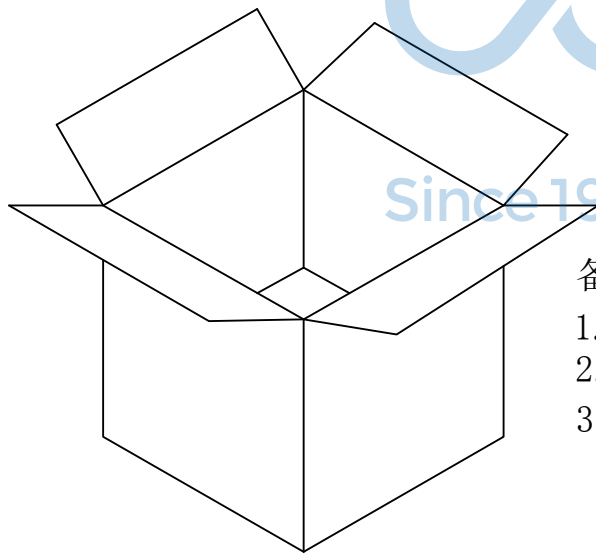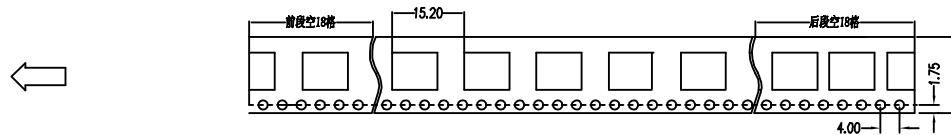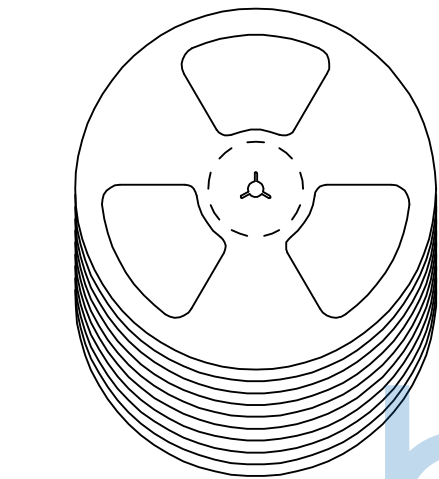

备注:

1. 包装数量: 2000/PCS/卷, 10卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS),  
上带: 聚乙烯 (PET),  
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM

纸箱规格: 345\*345\*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: FPC 0.5-14P 正位立贴 H=4.0 无盖	
X: ±3* .X: ±2* .XX: ±1*		P.J. NO.: PC.02.03-42-F001	
APPD. JM_Zheng	CHKD. LYX	SIZE: A4 DRW NO.:	
DR. TSP	PDWG.NO: 0456-1	FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	