
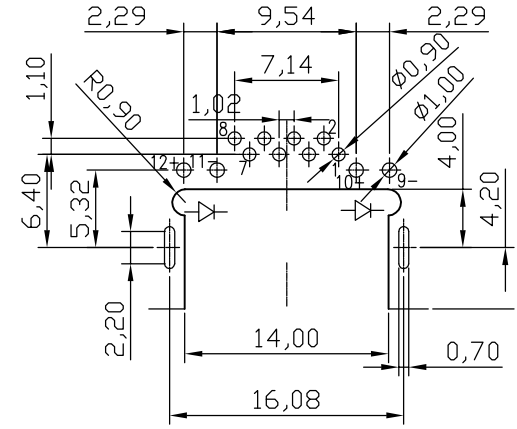


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

- NOTE:
- ELECTRICAL CHARACTERISTICS;
    - VOLTAGE RATING:125 VAC RMS
    - CURRENT RATING:1.5AMP
    - CONTACT RESISTANCE:30 MILLIOHMS MAX
    - INSULATION RESISTANCE:1000 MEGOHMS MIN
    - DIELECTRIC STRENGTH:1000V AC RMS 50Hz. 1MIN
  - ENVIRONMENTAL:
    - TEMPERATURE RANGE:-40° C +85° C
    - RELATIVE HUMIDITY:90 95%(40±2° C)

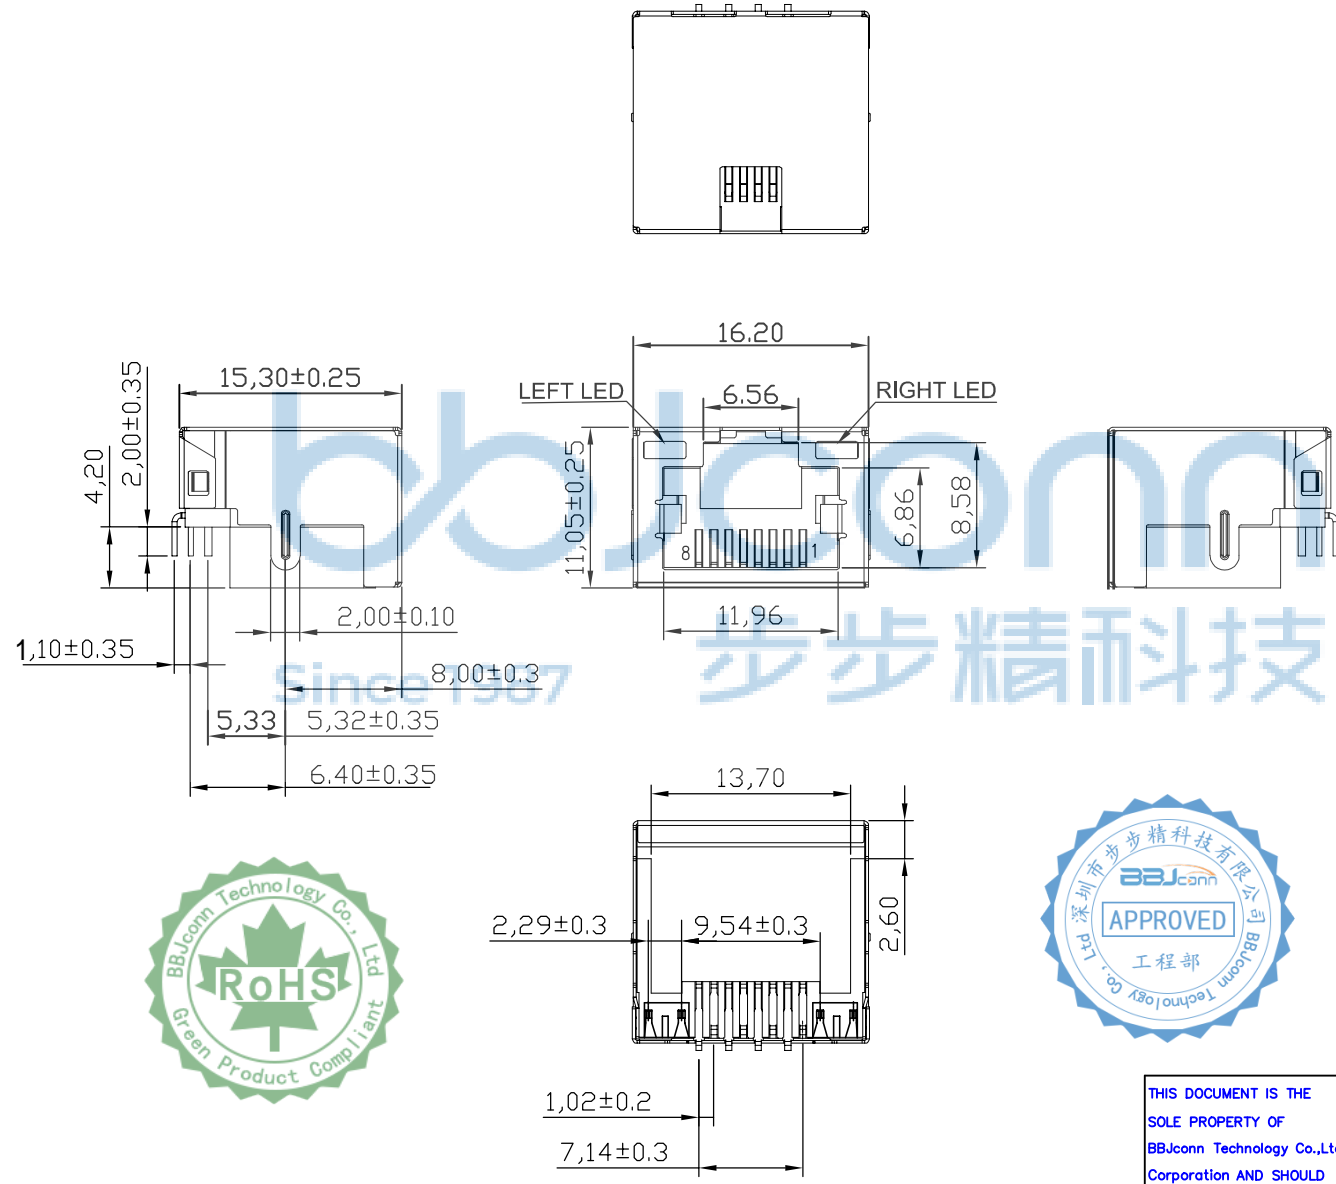

3.MATERIAL LIST:

No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	STAINLESS STEEL	NI PLATED
2	CONTACT	8	PHOSPHOR BRONZE	AU 3U/SN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0409-1

**深圳市步步精科技有限公司**

NAME: RJ45 8P 沉板4.20 L=15.30 DIP 带灯(左绿右黄)

APPD. JM\_Zheng

CHKD. LYX


DR. SGF

PJ. NO.: RJ.03.22-21-A003

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

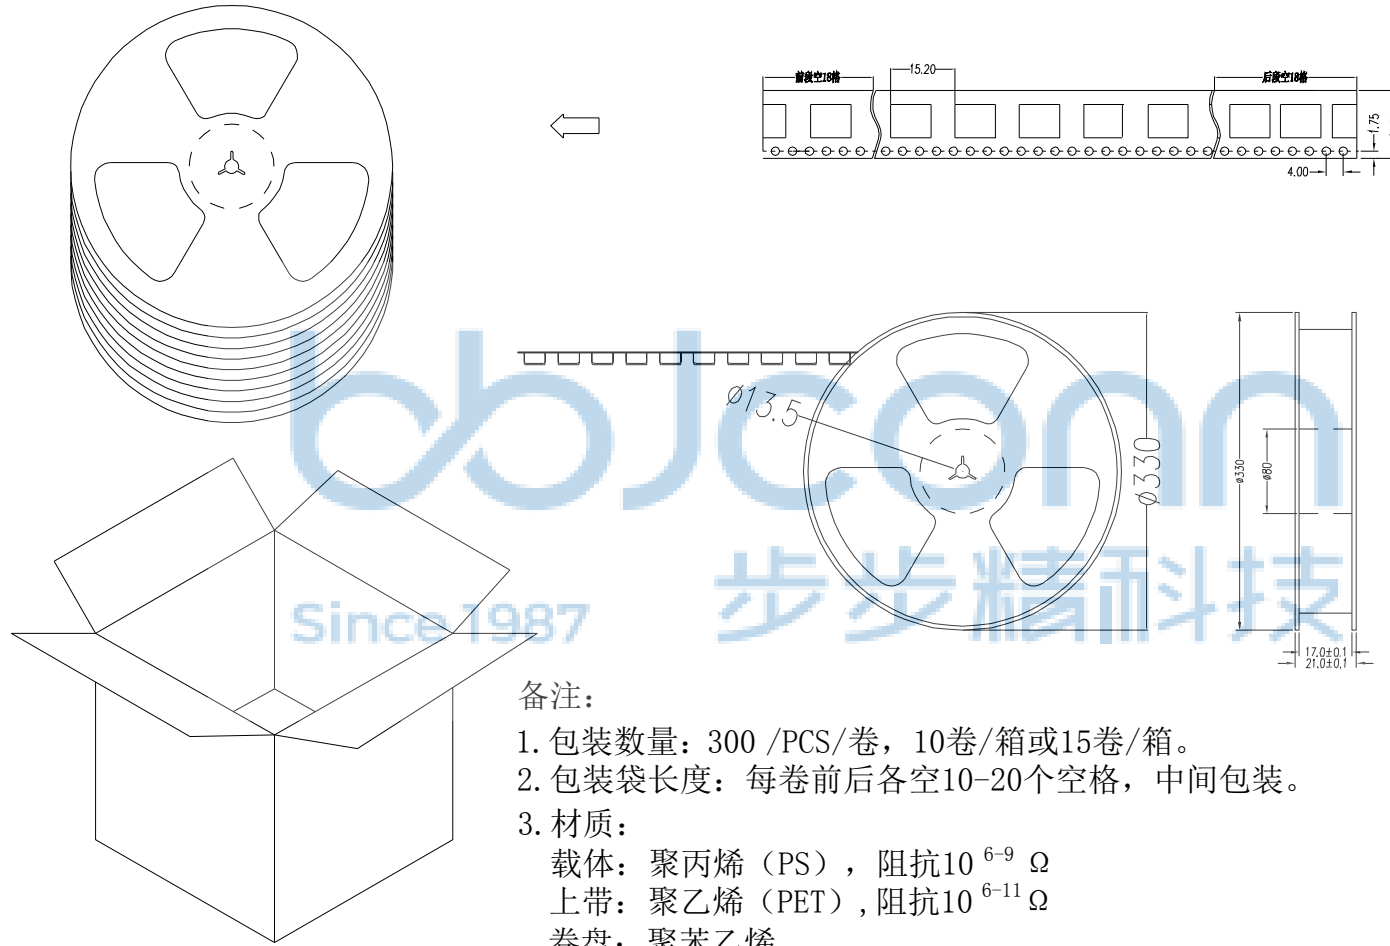

备注:

1. 包装数量: 300 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' X'X': ±1'	
APPD.	JM_Zheng	NAME: RJ45 8P 沉板4.20 L=15.30 DIP 带灯(左绿右黄)	
CHKD.	LYX	PJ. NO.: RJ.03.22-21-A003	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0409-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	