
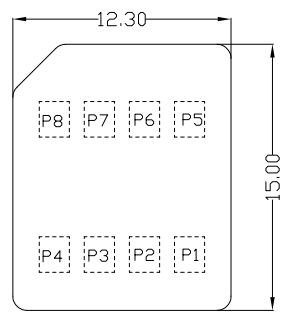


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTES:

- ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 0.5A.
VOLTAGE RATING: 5V.
CONTACT RESISTANCE: 50 MILL.OHM MAX.
INSULATION RESISTANCE: 1000 MEG.OHM MIN.
- MECHANICAL SPECIFICATIONS:
DURABILITY: 5000 CYCLES MIN.

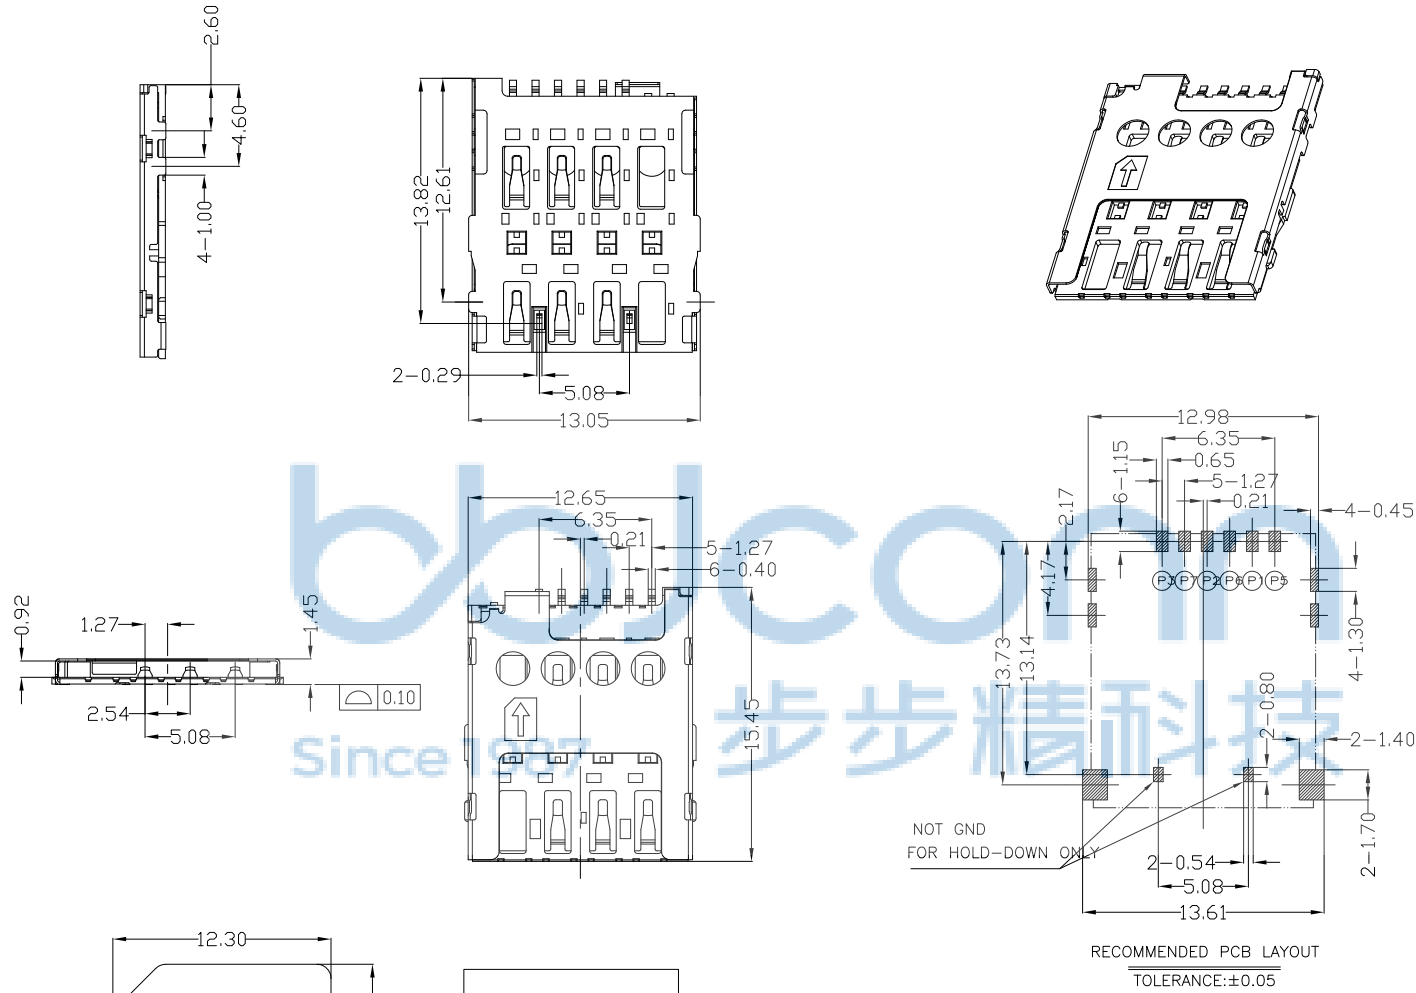

Pin1:VCC
Pin2:RST
Pin3:CLK
Pin4:Reserved
Pin5:GND
Pin6:VPP
Pin7:I/O
Pin8:Reserved


MICRO. SIM CARD

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	.X: ±0.38 X': ±3'		NAME:	
	.XX: ±0.25 .X': ±2'		卡座 292-SIM06-145 6P 贴片	
	.XXX: ±0.13 .XX': ±1'		PJ. NO.: CD.02.02-02-0011	
	APPD. JM_Zheng		SIZE: A4 DRW NO.:	
PDWG.NO: 0214-1	DR. SGF	CHKD. LYX	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A0	UNIT: mm PAGE: 1/2

深圳市步步精科技有限公司

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

<图一>

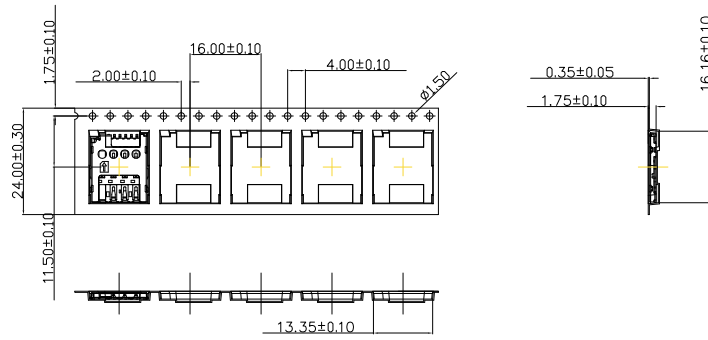


<表一>


包装数量

PCS/卷	卷/箱	PCS/箱
1500	11	16500


<图三>

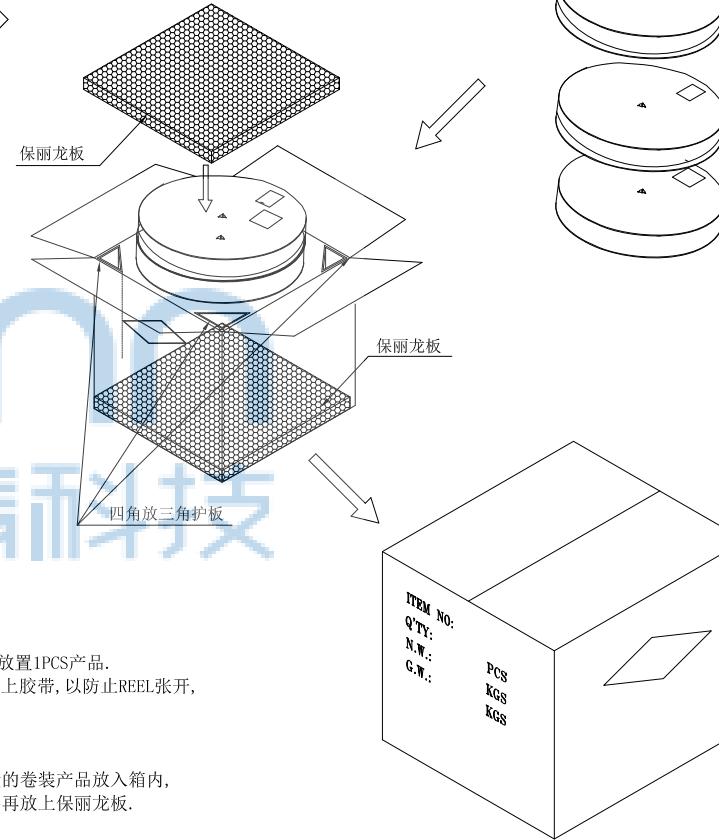

<图二>

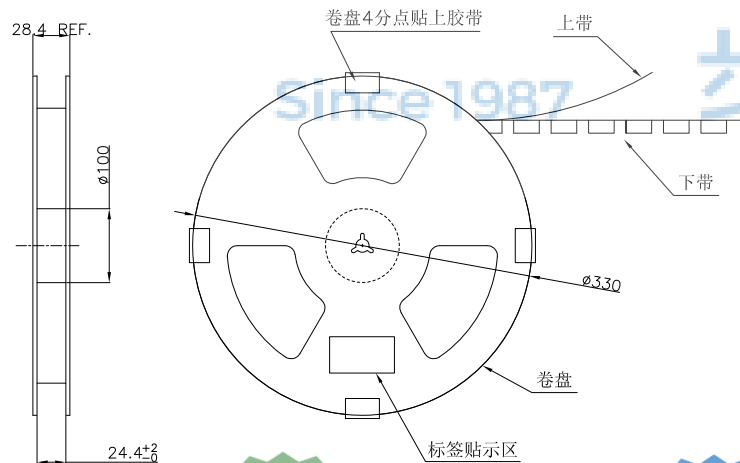

放料方向

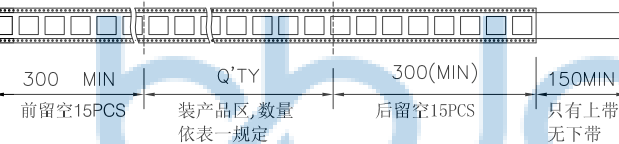

NOTE:

- 依<图一>示放置产品于下载中, 每穴放置1PCS产品.
- 包装机包好后, 在REEL的个等分点上胶带, 以防止REEL张开, 每REEL贴1PCS标签, 如<图二>示
- 包装数量见如<表一>示
- 包装成箱见如<图三>示
箱底放保利龙板, 再依次将指定数量的卷装产品放入箱内, 四角分别放入四个三角护板, 最上层再放上保利龙板.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0214-1		DR. SGF	NAME: 卡座 292-SIM06-145 6P 贴片 PJ. NO.: CD.02.02-02-0011 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2