


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	SGF

NOTES:
 ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING:0.5A
 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V
 INSULATION RESISTANCE:500MΩ MIN
 CONTACT RESISTANCE:100mΩ MAX
 ENVIRONMENTAL
 TEMPERATRUE RANGE: -25°C TO +85°C
 MECHANICAL CHARACTERISTICS
 MATING CYELES:5000 INSERTIONS
 INSERTION/OUT FORCE:0.1-4.0KGF
 MATERIAL
 INSULATOR: HIGH TEMPERATURE PLASTIC UL94V-0
 COLOR:BLACK
 CONTACT: COPPER ALLOY
 SHELL: STAINLESS
 SPRING:SWP
 PLATING:
 CONTACT
 UNDERPLATE: NICKEL 40u".
 CONTACT AREA: GOLD FLASH OVER NICKEL 40u".
 SOLDER AREA: TIN 80u" MIN OVER NICKEL 40u".
 SHELL:PLATE 30u"NICKEL MIN OVER ALL

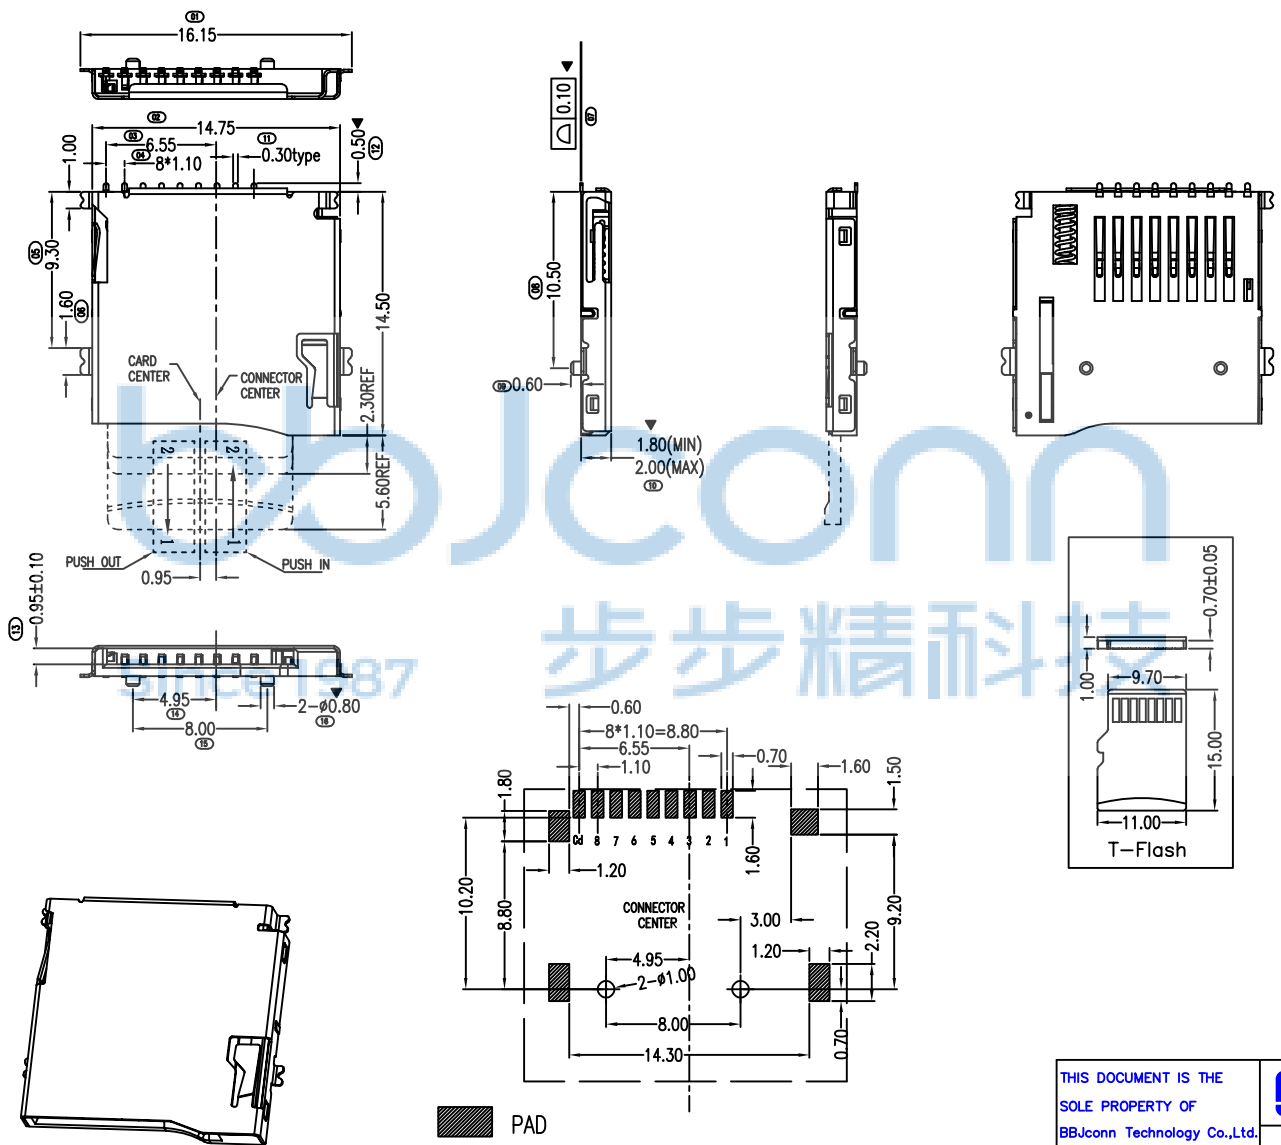

T-F 铁壳	1PC	PIN NO.	NAME	YTYPE	DESCRIPTION
T-F 线簧	1PC	1	DAT2	I/O/PP	DATE LINE(BIT2)
T-F 弹簧	1PC	2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
T-F 9PIN 端子	1SET	3	CMD	PP	COMMAND RESPONSE
T-F 滑块	1PC	4	VDD	S	SUPPLY VOLTAGE
T-F 主体胶芯	1PC	5	CLX	I	CLOCK
		6	VSS	S	SUPPLY VOLTAGE GROUND
		7	DAT0	I/O/PP	DATE LINE(BIT0)
规格	数量	8	DAT1	I/O/PP	DATE LINE(DIT1)

THIS DOCUMENT IS THE SOLE PROPERTY OF **BBJconn Technology Co.,Ltd.** Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0302-1

深圳市步步精科技有限公司

NAME: TF 外焊卡座 带柱

APPD. JM_Zheng

CHKD. LYX


DR. SGF

PJ. NO.: CD.01.02-13-0002

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2

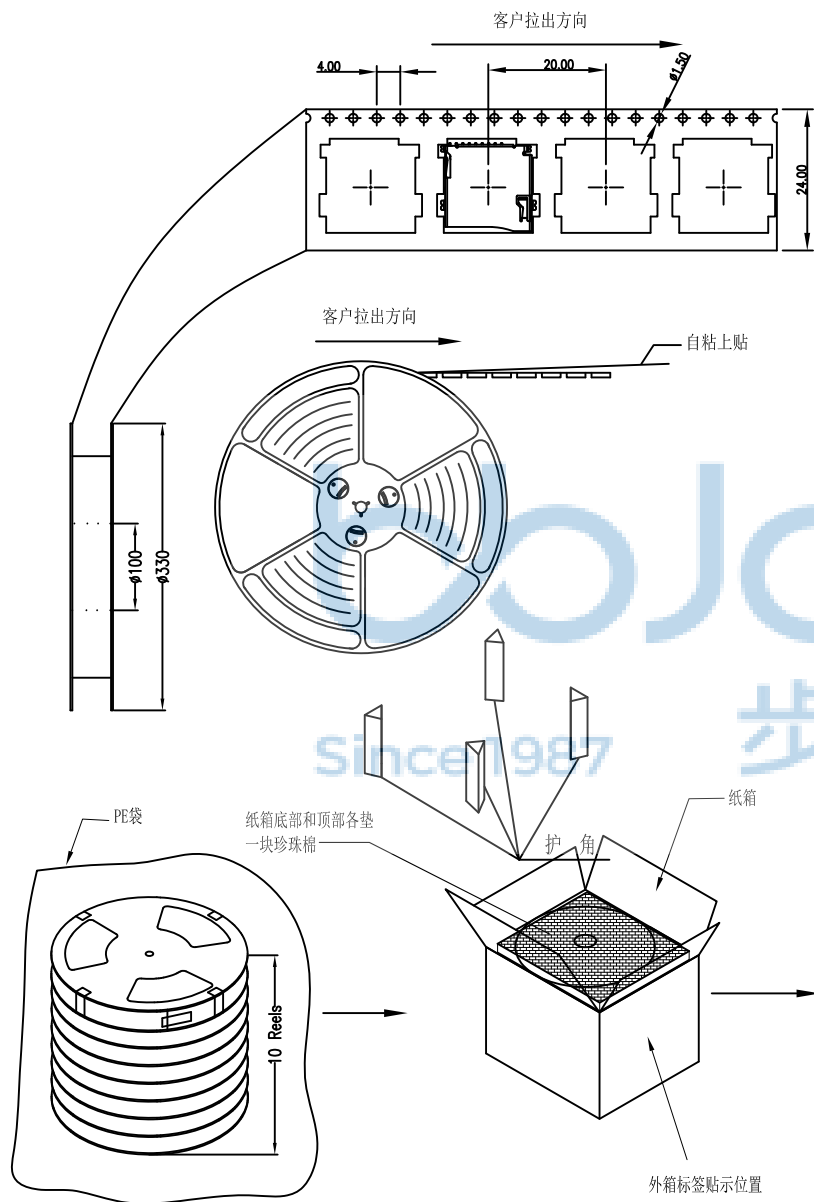

NOTES

- 每卷包装数量:1000PCS/每卷
- 卷带包装方式:
- 每箱包装数量:10000PCS/箱
- 纸箱350mm*350mm*340mm(内部尺寸), 材质K=K
- 10K/箱产品净重: 5.496kg, 毛重: 10.73kg

将10卷产品放入箱内



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: TF 外焊卡座 带柱	
PDWG.NO: 0302-1		PJ. NO.: CD.01.02-13-0002	
DR. SGF		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	