


RoHS +HF Compliant

bbJconn
Since 1987 步步精科技

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	
A1		应客户要求更新图纸及包规图纸	2023 22/05	JM_Zheng









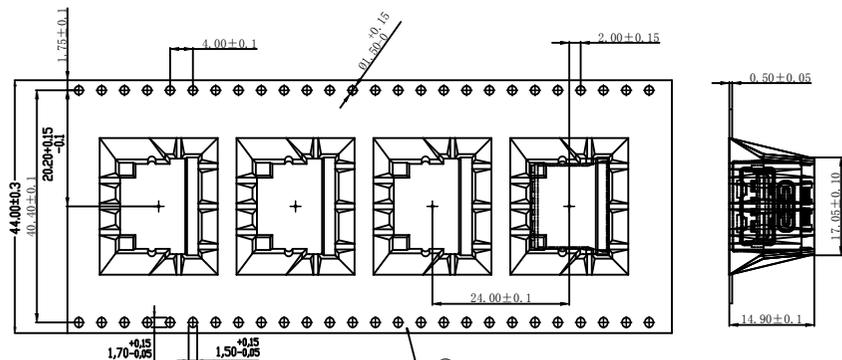


1. 包装方式:


1. 使用半自动包装机, 先将CARRY TAPE 送入导轨中, 并与COVER TAPE 贴合在上面, 其中初始9pcs空槽不要放产品, 然后将产品如图所示方向依次放入CARRY TAPE内, 每个槽放1PCS, 每REEL共包装产品170PCS, 最后需留9Pcs空槽不放产品.
2. 用胶带将CARRY TAPE粘在一起, 外圈再用塑胶带(周波)缠绕一圈, 按客户要求贴在REEL上贴上LABEL, 注明料号, 日期, 数量.
3. 如图示, 将装好的REEL装入PE袋内, PE袋内放置2Pcs干燥剂, 然后在外箱底部放1Pcs纸板, 纸箱内4个角分别放置1个三角板, 再将PE袋内REEL放入CARTON内, 顶部再加一个纸板, 最后用胶带封箱, 并在纸箱外相应的地方贴上标签.

注意:

1. 防止漏装, 禁止碰歪产品锡脚;
2. 产品在 CARRY TPAE中的方向须如图所示 (BOSS的方向)

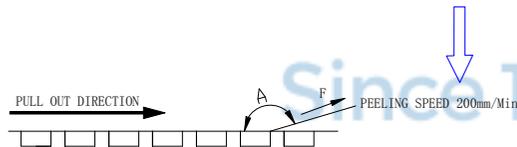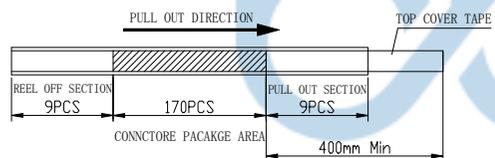

NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
⑩	LABEL (CARTON)	1Pcs	80mm*60mm	
⑨	CARTON	1Pcs	L350*W350*H420	
⑧	FOLDER PAPER BOARD	4Pcs	(10*14*10) (H40.5)	
⑦	PE Bag	1Pcs	520*320*460, T=0.05mm	
⑥	PAPER BOARD	2Pcs	330*330	
⑤	LABEL (TAPE REL)	8Pcs	80mm*60mm	
④	REEL	8R	Ø330mm, H=44.5mm	
③	COVER TAPE	1R	PS透明, W=37.5mm	
②	TAPE REL	8Pcs	PS, W=44mm, T=0.5mm, 总长4.6M	
①	USB2.0+TYPE-C 16P	1360Pcs	N/A	

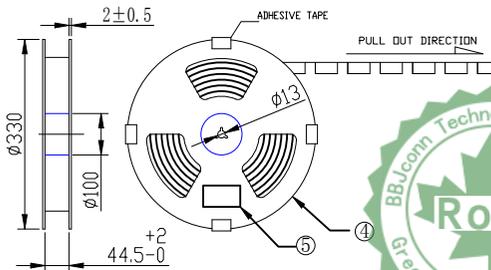

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG,NO: 9999-9

深圳市步步精科技有限公司

NAME: 防水母座 USB2.0 AF90度 大电流7A+TYPE-C 16P L=13.5 LCP橙胶 平口 不锈钢外壳 DIP 端子镀金1u

PJ. NO.: UB.01.12-53-W003

SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A1 UNIT: mm PAGE: 2/2