

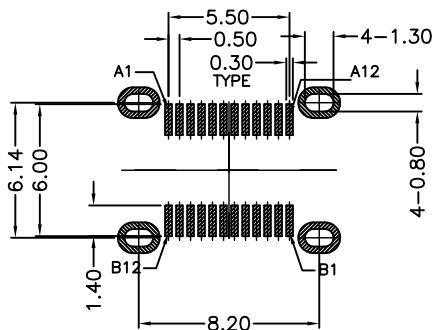
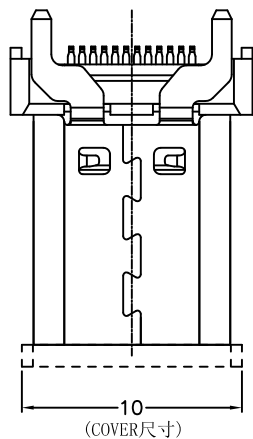

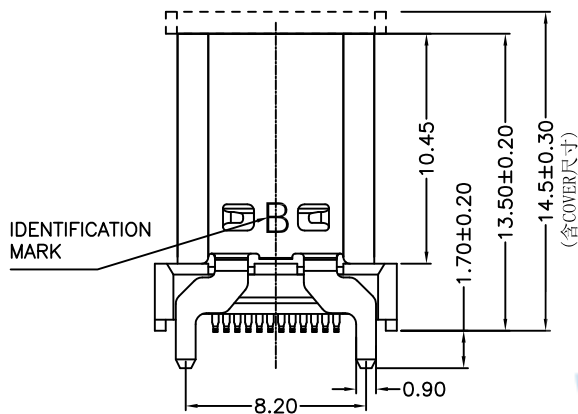




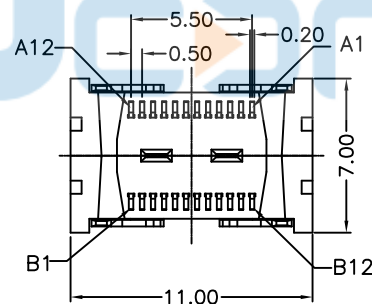

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05
KEEP OUT AREA

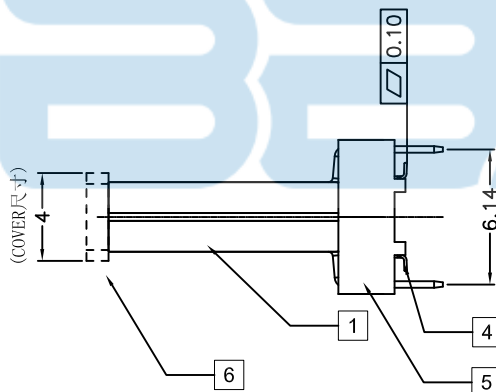

1. Contact Resistance: 40mOHM Max. ;
2. Dielectric Withstanding Voltage: 100V AC For 1 Minute;
3. Insulation Resistance: 100M OHM Min. ;
4. Mating And unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
5. Durability: 10000 Cycles;

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	TX1+	B11	RX1+
A3	TX1-	B10	RX1-
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	RX2-	B3	TX2-
A11	RX2+	B2	TX2+
A12	GND	B1	GND

TOLERANCE UNSPECIFIED

X. ± 0.35 X° $\pm 2^\circ$
.X ± 0.25 .X° $\pm 1.5^\circ$
.XX ± 0.15
.XXX ± 0.10



深圳市步步精科技有限公司

TITLE: TYPE-C 24P 母座 直立式 H=13.5

DRAWN/ DATE	设计 HMY	SIZE: A4	UNIT: MM.	PART. NO:	UC. 01. 62-1W-0003
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0470-1	SHEET: 页码	



AROUND THE OUTER PERIPHERY IN A TURE.
WEEDING THE COVER TAPE.

PELLING ANGLE: 165°X~180°X


合格标签
Qualified Label

PULL OUT DIRECTION


WITHOUT CHARGE
160mm Min(Ending
partempty 8PCS)

WITH PRODUCT CHARGE
(250PCS)

WITHOUT CHARGE
200mm Min
(Front side
of reeling
empty 8PCS)

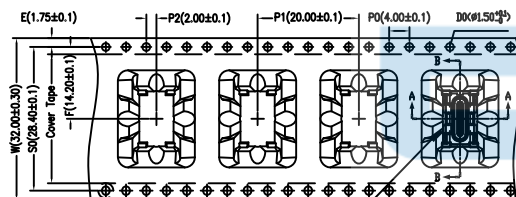

载带拉出方向




产品朝合面朝左
(摆放方向一致)


SECTION A-A

包装规范说明:

1. 如图所示首先CARRIER TAPE (载带) 需先预留8PCS空格后方可置入成品,并附COVER TPAE(上带)覆盖于上,再配合带装机自动卷绕于REEL(塑胶卷轴)收料。
As shown from picture, the initial starting carrier need to be emptied for 8 pcs, then put connector on 1st carrier; Then cover it with Cover Tape, and Reeling it with Reel auto machine.
2. 在定量包装完成后,前端CARRIER TAPE亦需预留8PCS空格,而COVER TPAE配合CARRIER TYPE长度覆盖后,并须再超出200mm以上,最后以胶纸贴固,并于REEL盘上方贴好标签。
In the end of the Reel, need to empty 8 pcs carrier tape; After covering the carrier, then the Cover Tape need to be 200mm longer, and use tape to fix the cover tape to the reel. Put ualified Label" on the tape.
3. 注意:COVER TAPE不可浮起或有贴附不顺,歪斜及成品放置方向错误之现象。
Attention: no deformation of Cover Tape is allowed (protruded plastic, or not smooth, bednt or product is wrong positioned)
4. 在纸箱内左右,前后侧各放入一块三角卡板,每个PE袋中装入8个REEL盘,并在PE袋中放入2PCS干燥剂,用胶带封好。在每个纸箱内装入8PCS卷盘,共1叠。盖上前箱盖后以胶带封箱,于侧位置贴好标签。
Inside of carton, at left and right side, put triangle fixed card; Put 8Reels to PE bag, and put 1 bags of desiccant inside the PE bag. Each carton has 8 reels. Put "Delivery label" on side of the carton.
5. 零箱部分,出货时须用缓冲物填满。
The fractional box must be filled by cushion before shipment.




载带&卷轮



防水袋
1PCS

在装入产品的
防水袋中放置2
包干燥剂

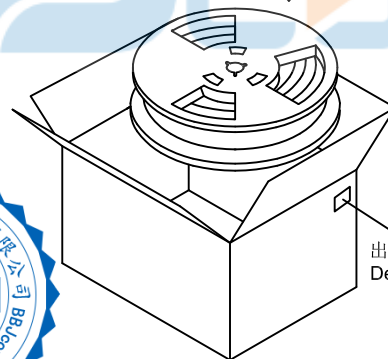

出货标签
Delivery Label

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

产品规格 Product spc.		/
包装容量 QTY	个 / 卷 Pcs/Reel	250
	卷 / 箱 Reel/Ctos.	8
	个 / 箱 Pcs/Ctos.	2000
重量 Weigh (Kg)	净重 N. W.	/kg
	毛重 G. W.	/kg



NO.	包材名称 Items	包材料号 Item no	用量 Usage	适用类别 Series	备注 / Remark
①	纸箱 Carton		1	广东省外, K=K	400*400*310mm
②	PE Bag		2		600*600*0.05mm
③	carrier		8		W=32mm PET 透明L=5.32M
④	载带				W=25.5MM, 200m/r透明色
⑤	塑胶卷轴 Plastic Reel		8		≤380mm, W=37mm
⑥	干燥剂 Desiccant		4		
⑦	环保标签 RoHS Label		9		
⑧	合格标签 Qualified Label		8		80*35mm
⑨	出货标签 Delivery Label		1		80*50mm

TOLERANCE UNSPECIFIED

X. ± 0.35	X° ± 2°
.X ± 0.25	.X° ± 1.5°
.XX ± 0.15	
.XXX ± 0.10	



深圳市步步精科技有限公司

TITLE: TYPE-C 24P 母座 直立式 H=13.5

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART. NO:	UC. 01. 62-1W-0003
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0470-1	SHEET: 页码	