



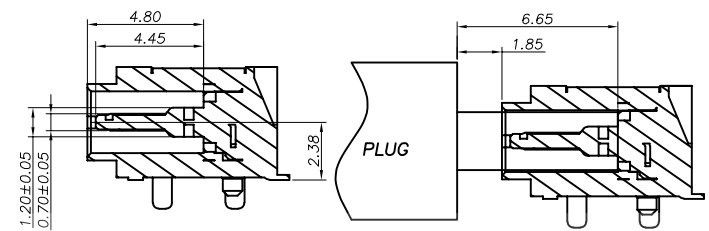

NOTES:





SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 度 ~ 85 度
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
- 9.WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.


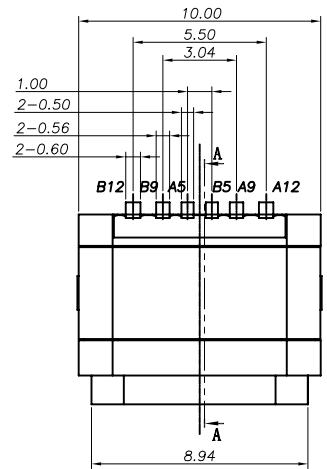


SECTION:A-A

AFTER MATING

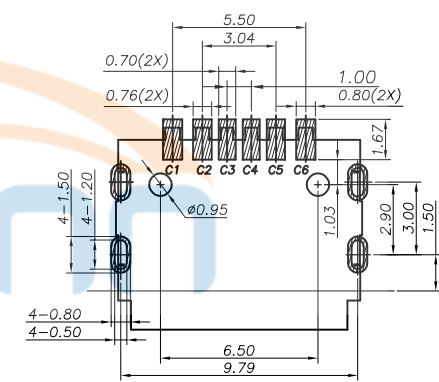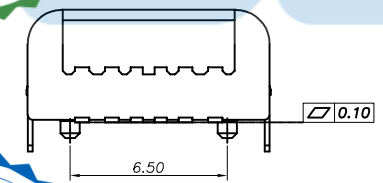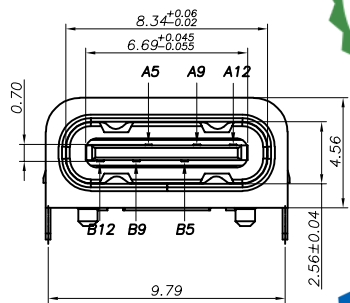

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

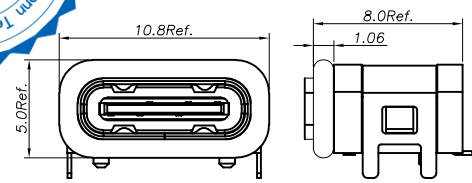

WITH O-RING

5	防水圈	硅胶	BLACK	1PCS
4	SHELL	STAINLESS STEEL	NI Plated	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
2	CONTACT	COPPER ALLOY	TIN/Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

TOLERANCE

X.X ±0.35 X* ± 2°

.XX ±0.25 .X* ± 1°

.XXX ±0.10 .XX* ±0.5°

UNITS mm

深圳市步步精科技有限公司


TITLE:

TYPE-C 6P 防水母座板上四脚插L=7.85带柱IPX7 CH=2.38




DRAWN/ DATE	设计 LYX	SIZE:A4	UNIT:MM.	PART.NO: UC.01.53-1W-0002
CHECKED/ DATE	审核 HMY	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0478-1	SHEET: 页码

PIN ASSIGNMENT:

PIN NO.	A1&B12	A4&B9	A5	A5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

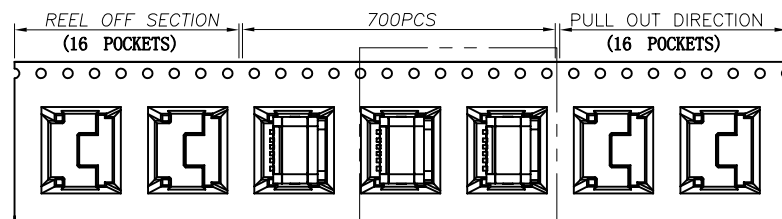

SEE DETAIL X

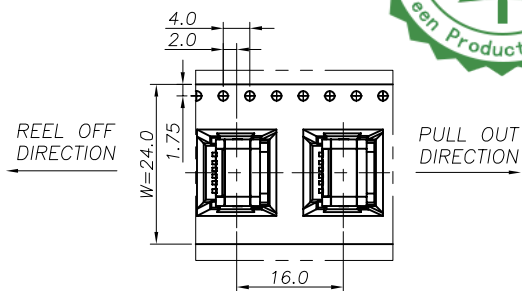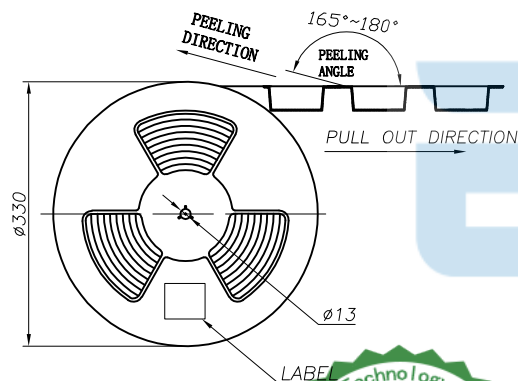

1000PCS/BAG
O-RING

PAPER BOARD

REEL AND TAPE

REEL AND TAPE

PAPER BOARD

O-RING

FOLDER
PAPER BOARD

CARTON

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

	REEL	CARTON
CONNECTOR (PCS)	700	7000

TOLERANCE			 深圳市步步精科技有限公司				
X.X	±0.35	X.*					± 2*
.XX	±0.25	.X.*					± 1*
.XXX	±0.10	.XX.*					±0.5*
UNITS			mm				
			TITLE: TYPE-C 6P 防水母座板上四脚插L=7.85带柱IPX7 CH=2.38				
DRAWN/ DATE	设计	LYX	SIZE:A4	UNIT:MM.	PART. NO: UC.01.53-1W-0002		
CHECKED/ DATE	审核	HMY	SCALE: 1:1		PROJECTION		REV.: 版本
APPROVED/ DATE	核准	LJP	DWG.	PATH	0478-1		SHEET: 页码