

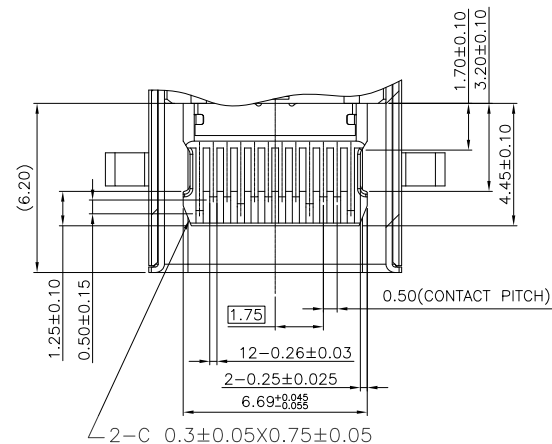





REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

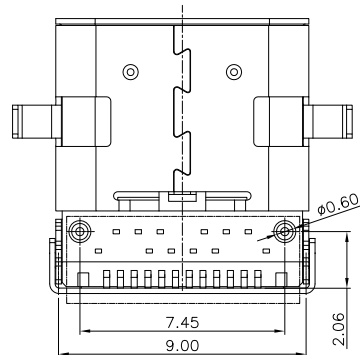


NOTES:

1. MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
PLATED GOLD ON CONTACT AREA,
G/F GOLD ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.
SHELL: SUS304-H, T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
EMI SHIELD: SUS304-H, T=0.12±0.03mm
LATCH: SUS301-H, T=0.15±0.03mm
2. MECHANICAL:
INSERTION: 5°~20N.
EXTRACTION: 8°~20N.
DURABILITY: 10000 CYCLES
3. ELECTRICAL:
CURRENT: 5A MAX FOR VBUS;
1.25A FOR GND, 0.25A FOR OTHER OTHER.
VOLTAGE: 20VDC MAX
WITHSTANDING VOLTAGE: 100V AC.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
4. ENVIRONMENTAL
TEMPERATURE RANGE -25° C ~ +85° C

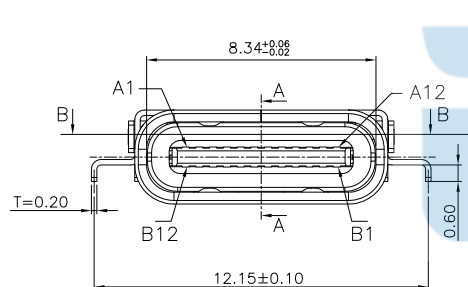

Section A-A
Scale 1:1

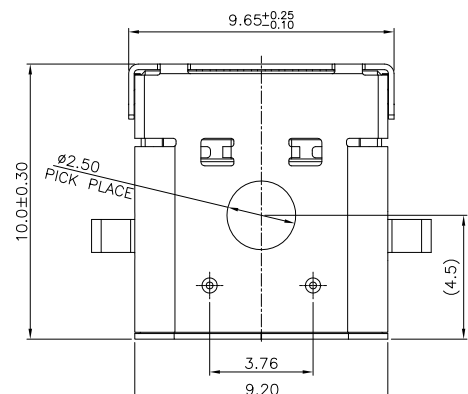


TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司			
0. ±0.38		TITLE:			
0.0 ±0.25		TYPE-C 24PIN 母座 沉板1.37 L=10.0 CH=0.34 双壳 脚长0.6			
0.00 ±0.15		DRAWN/ DATE	设计 TSP	SIZE: A4	UNIT: MM.
0.0° ±2°		CHECKED/ DATE	审核 LYX	PART. NO: UC.01.32-1W-0008	PROJECTION
		APPROVED/ DATE	核准 LJP	SCALE: 1:1	REV.: 版本
			DWG. PATH	0228-1	SHEET: 页码



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	VBUS	Bus Power	B9	VBUS	Bus Power
A5	CC1	Configuration Channel	B8	SBU2	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SBU1	Sideband Use (SBU)	B5	CC2	Configuraation Channel
A9	VBUS	Bus Power	B4	VBUS	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

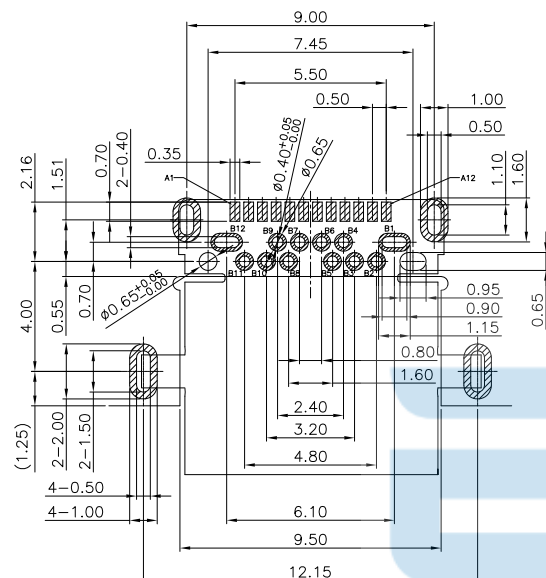


RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05 

TOLERANCE UNSPECIFIED

0. ± 0.38
0.0 ± 0.25
0.00 ± 0.15
0.0° $\pm 2^\circ$



TITLE:
TYPE-C 24PIN 母座 沉板1.37 L=10.0 CH=0.34 双壳 脚长0.6

DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART.NO: UC.01.32-1W-0008	REV.: 版本
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION		SHEET: 页码
APPROVED/ DATE	核准	LJP	DWG. PATH	0228-1		




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		


出料方向
PULL OUT DIRECTEON

NOTES

- 1.帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

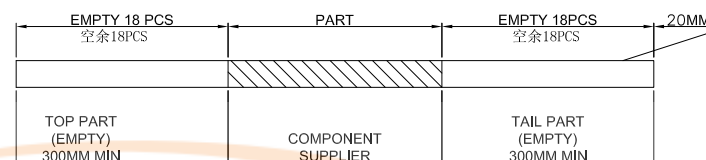

- 2.出貨運輸過程中一定注意：
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT：
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

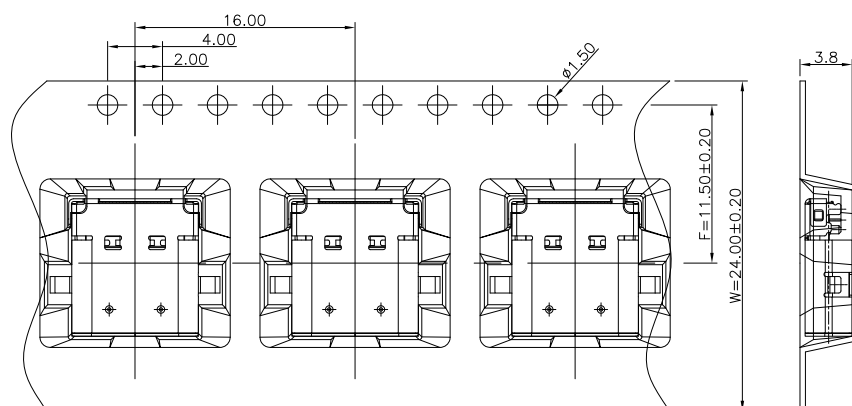


TOLERANCE UNSPECIFIED 0. ±0.38 0.0 ±0.25 0.00 ±0.15 0.0° ±2°		深圳市步步精科技有限公司	
TITLE: TYPE-C 24PIN 母座 沉板1.37 L=10.0 CH=0.34 双壳 脚长0.6			
DRAWN/ DATE	设计 TSP	SIZE:A4	UNIT:MM.
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PART.NO: UC.01.32-1W-0008
APPROVED/ DATE	核准 LJP	DWG. PATH	PROJECTION
		0228-1	REV.: 版本
			SHEET: 页码




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

at small positioning hole of the carrier tape side).
標籤黏貼處 (朝捲裝包材的小定位孔一側)
Location of label sticking (label)

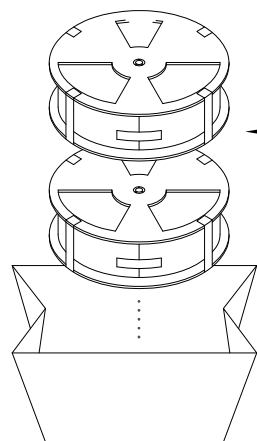


包裝盤 tape reel

防水袋
waterproof plastic bag

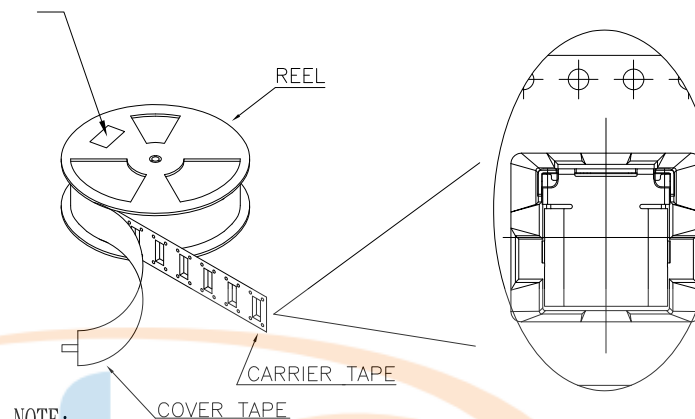

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格.
Packing q'ty of each reel & carton as below table shown.
2. 以上膠帶覆蓋下包裝帶經包裝機熱熔包裝
Use cover tape to cover and hot melt machine to seal up.
3. 將裝滿產品的卷盤放入紙箱並以膠帶封口
Put reels in the carton and use adhesive tape to seal up.



紙箱 carton

包裝容量 (PACKING CAPACITY)			重量 WEIGHT (Kg)		
PCS/REEL	REELS/CARTON	PCS/CARTON	N.W./PCS	N.W./BOX	G.W./BOX
1000	10	10000	0.78g	7.8Kg	

TOLERANCE UNSPECIFIED			深圳市步步精科技有限公司					
0. ±0.38 0.0 ±0.25 0.00 ±0.15 0.0° ±2°						TITLE: TYPE-C 24PIN 母座 沉板1.37 L=10.0 CH=0.34 双壳 脚长0.6		
DRAWN/ DATE	设计	TSP	SIZE:A4	UNIT:MM.	PART. NO: UC.01.32-1W-0008			
CHECKED/ DATE	审核	LYX	SCALE: 1:1		PROJECTION	REV.: 版本		
APPROVED/ DATE	核准	LJP	DWG. PATH		0228-1	SHEET: 页码		