





REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

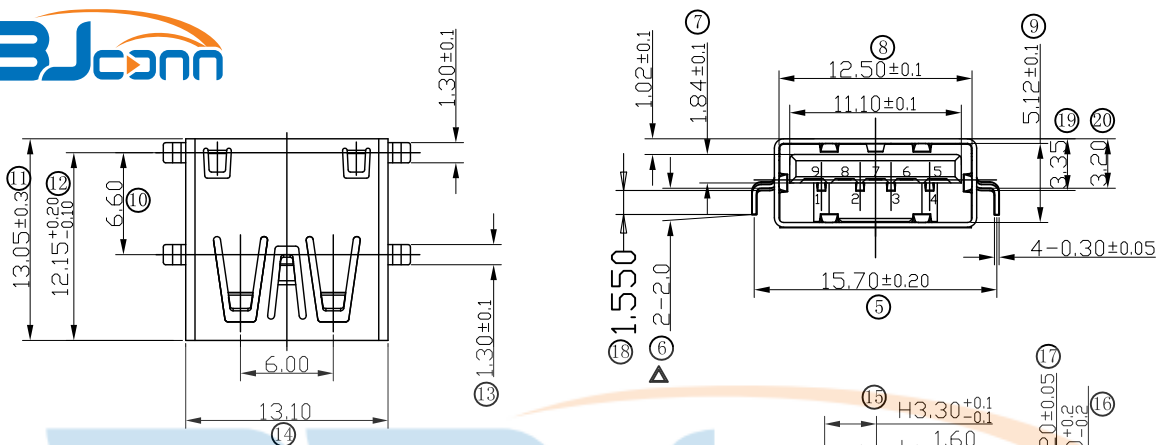

NOTE:

- MATERIAL:
 - INSULATOR: LCP UL 94V-0
 - CONTACT: BRONZE (T=0.20mm)
 - SHELL: SUS201 (T=0.30mm)
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAXIMUM
 - CONTACT CURRENT RATING: 1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 500 V R. M. S.
 - INSULATION RESISTANCE 1000 MEGOHMS MIN
 - OPERATING TEMPERATURE: -40° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.57kg MAX
 - UNMATED FORCE: 1.02kg MIN
 - DURABILITY: MANDATORY: 1500 CYCLES
- PLATING
 - TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 100u" MIN Tin ON SOLDER AREA
 - (1~30)u" Au ON CONTACT AREA
 - SHELL: 100u" MIN. NICKEL ALL OVER

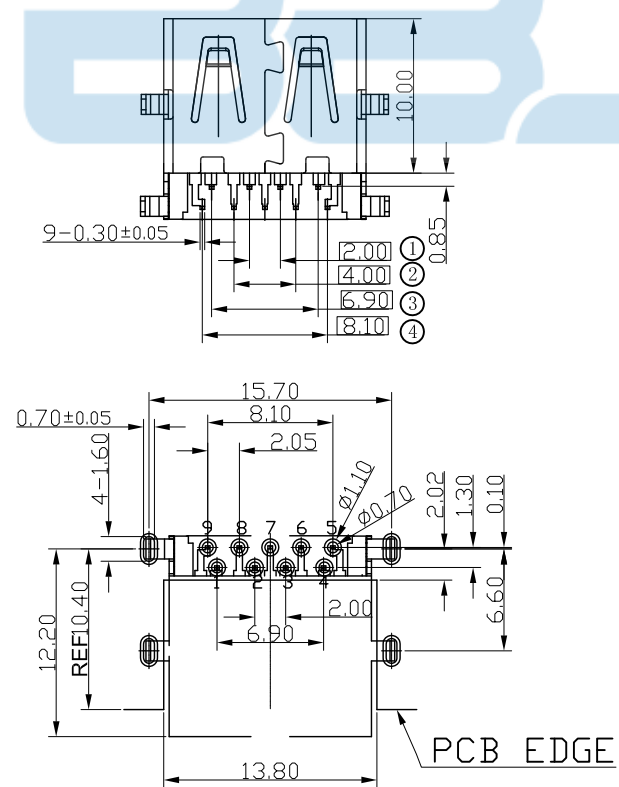

TOLERANCE: ±0.05, THICKNESS: 1.2 mm
RECOMMENDED PCB LAYOUT

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

TOLERANCES UNLESS OTHERWISE SPECIFIED
 X. ±0.30
 X.X ±0.25
 X.XX ±0.20
 X.XXX ±0.10
 ANGEL ±1°







深圳市步步精科技有限公司

TITLE: USB3.0 AF90度 L=13.05 沉板2.36 四脚插 DIP LCP蓝胶 平口不锈钢壳

DRAWN/ DATE	设计	LYX	SIZE: A4	UNIT: MM.	PART. NO: UB.03.32-33-W002
CHECKED/ DATE	审核	HMY	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准	LJP	DWG. PATH	0471-1	SHEET: 页码



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

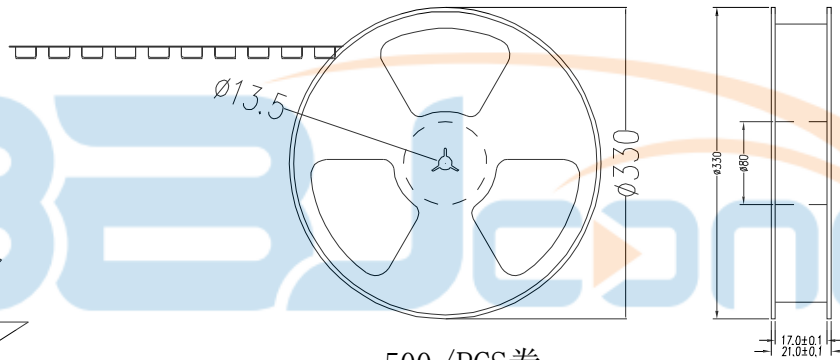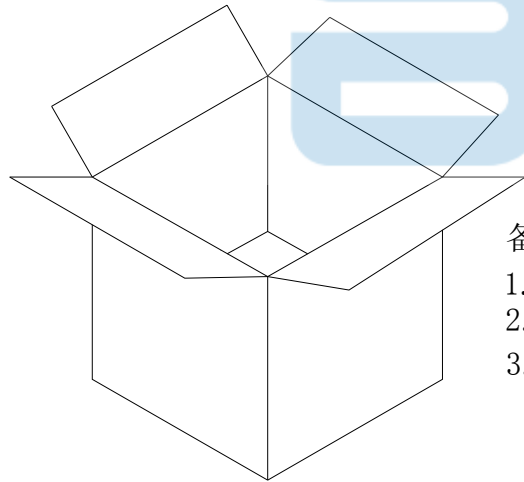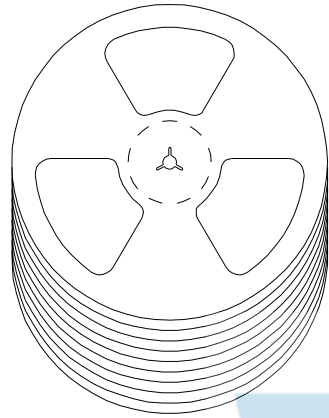

500 / PCS 卷

备注:

1. 包装数量: 500 / PCS / 卷, 10卷 / 箱或15卷 / 箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
 - 载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
 - 上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
 - 卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
 纸箱规格: 345*345*35MM



TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司 TITLE: USB3.0 AF90度 L=13.05 沉板2.36 四脚插 DIP LCP蓝胶 平口不锈钢壳	
.0	±0.35		
.00	±0.25	DRAWN/ DATE 设计 TSP SIZE:A4 UNIT:MM. PART. NO: UB.03.32-33-W002	
.000	±0.15	CHECKED/ DATE 审核 LYX SCALE: 1:1 PROJECTION REV.: 版本	
X. °	±2.00°	APPROVED/ DATE 核准 LJP DWG. PATH 0471-1 SHEET: 页码	
CUSTOMER DRAWING			