

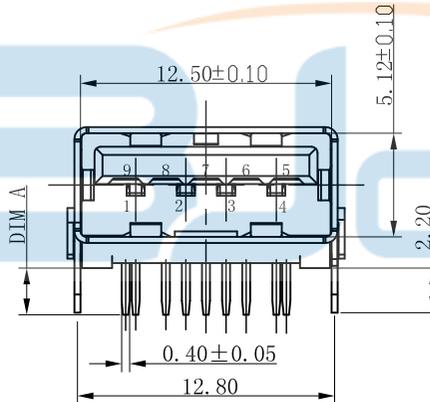


RECOMMENDED PCBA LAYOUT  
(TOLERANCE  $\pm 0.05$ )

|      |
|------|
| DIMA |
| 2.10 |
| 2.30 |

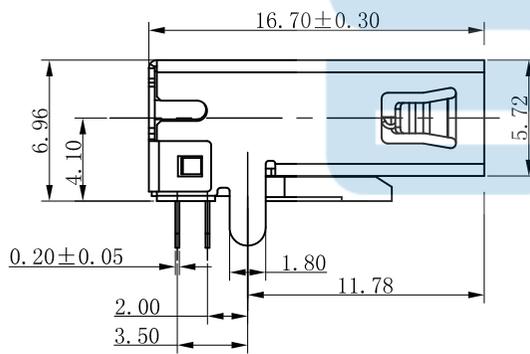

| Pin NUMBER | SIGNAL NAME |
|------------|-------------|
| 1          | VBUS        |
| 2          | D-          |
| 3          | D+          |
| 4          | GND         |
| 5          | Std_SSRX-   |
| 6          | Std_SSRX+   |
| 7          | GND_DRAIN   |
| 8          | Std_SSTX-   |
| 9          | Std_SSTX+   |
| Shell      | Shield      |

|                       |                  |
|-----------------------|------------------|
| TOLERANCE UNSPECIFIED |                  |
| .0                    | $\pm 0.35$       |
| .00                   | $\pm 0.25$       |
| .000                  | $\pm 0.15$       |
| X. °                  | $\pm 2.00^\circ$ |
| CUSTOMER DRAWING      |                  |
| DRAWN/                | 设计 TSP           |
| DATE                  |                  |
| CHECKED/              | 审核 LYX           |
| DATE                  |                  |
| APPROVED/             | 核准 LJP           |
| DATE                  |                  |

**BBJconn** 深圳市步步精科技有限公司

TITLE: USB 3.0 AF 90度 L=16.70 后两脚直插 脚长2.10 端子DIP 平口 LCP蓝胶 铜壳

|            |            |                            |           |
|------------|------------|----------------------------|-----------|
| SIZE: A4   | UNIT: MM.  | PART. NO: UB.03.12-32-W001 | REV.: 版本  |
| SCALE: 1:1 | PROJECTION |                            | SHEET: 页码 |
| DWG. PATH  | 0540-1     |                            |           |


| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------|
| A    | NEWS ISSUE  |      |      |

NOTE:  
 1. MATERIAL:  
 1.1 INSULATOR: HIGH TEMPERATURE PLASTIC  
 1.2 CONTACT: BRONZE  
 1.3 SHELL: BRASS/SPCC  
 2. ELECTRICAL CHARACTERISTICS:  
 2.1 CONTACT RESISTANCE: 30mΩ MAX  
 2.2 CONTACT CURRENT RATING: 1.5A  
 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.  
 2.4 INSULATION RESISTANCE 100 MΩ MIN  
 2.5 OPERATING TEMPERATURE: -20° C ~ 60° C  
 3. MECHANICAL CHARACTERISTICS:  
 3.1 MATING FORCE: 3.57kgf MAX  
 3.2 UNMATING FORCE: 1.02kgf MIN  
 3.3 DURABILITY: MANDATORY: 1,500 CYCLES  
 4. PLATING  
 4.1 TERMINAL:  
 50u" MIN NICKEL ALL OVER  
 80u" MIN Tin ON SOLDER AREA  
 (1~30)u" Au ON CONTACT AREA  
 4.2 SHELL: 50u" MIN. NICKEL ALL OVER  
 5. "▼" FOR MAJOR DIM  
 6. "⊗" FOR FAI DIM







| REV. | DESCRIPTION | NAME | DATE |
|------|-------------|------|------|
| A    | NEWS ISSUE  |      |      |

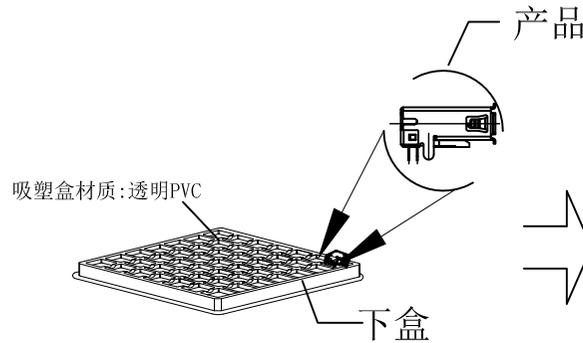

① 吸塑盒 (1Set). 100Pcs/盒




② 盖好上盖

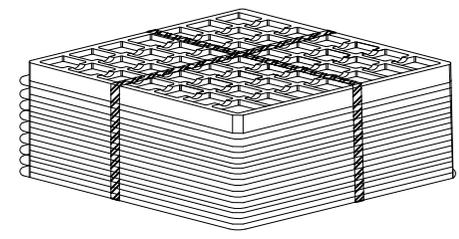


③ 每20盘用透明胶带绑紧/捆




外箱物料标签

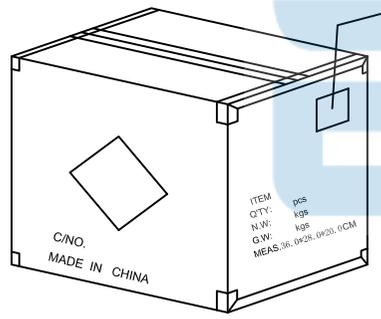

④ 依图示粘贴产品其它标签.



⑤ 外箱用透明胶纸带封“工”字型.

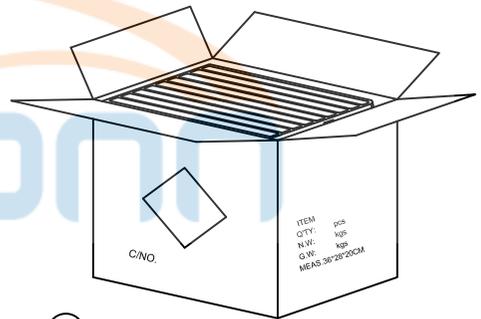

⑥ 每箱平放1捆产品,若尾数箱在空间处加装填充物. 一箱(2k). 纸箱规格: 36.0\*28.0\*20.0CM 纸箱材质: K=K



备注:  
 1. PE真空盒1Set  
 2. 每盒装成品100Pcs,  
 3. 每箱装20盒,  
 4. 外箱尺寸与规格印刷: 详见包材图面;  
 5. 外箱用透明胶纸带封“工”字型;  
 6. 依外箱图示位置粘贴好产品或其它标签.  
 (若客户另有贴标签要求, 则按其定单注明之要求贴)

| 每箱数量  | 净重 | 毛重     |
|-------|----|--------|
| 2K套/箱 |    | 5.05KG |

|                       |        |  |            |                            |           |
|-----------------------|--------|--|------------|----------------------------|-----------|
| TOLERANCE UNSPECIFIED |        | 深圳市步步精科技有限公司<br>TITLE: USB 3.0 AF 90度 L=16.70 后两脚直插 脚长2.10 端子DIP 平口 LCP蓝胶 铜壳 |            |                            |           |
| .0                    | ±0.35  | SIZE:A4  | UNIT:MM.   | PART. NO: UB.03.12-32-W001 |           |
| .00                   | ±0.25  | CHECKED/ DATE  | SCALE: 1:1 | PROJECTION                 | REV.: 版本  |
| .000                  | ±0.15  | APPROVED/ DATE   | DWG. PATH  | 0540-1                     | SHEET: 页码 |
| X.°                   | ±2.00° | 设计 TSP   |            |                            |           |
| CUSTOMER DRAWING      |        | 审核 LYX   |            |                            |           |
|                       |        | 核准 LJP   |            |                            |           |