



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levcl
5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN






物理性能:Mechanical:

1. 插拔力: Cnncctor Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料:Matarial:

1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
PBT White/Black
2. 端子:Contact:Copper Alloy C2680
Plated Gold in Mating Area;
Tin On Solder Talls
3. 外壳:Shell: Copper Alloy SPCC
Nickel Plating

5	SHELL-B	Fe	T=0.30	N i80~ 100U"	1
4	SHELL-A	Fe	T=0.30	N i80~ 100U"	1
3	TERMINAL-B	BRASS	T=0.25	Sn 100U"+ Au 1U"	4
2	TERMINAL-A	BRASS	T=0.25	Sn 100U"+ Au 1U"	4
1	HOUSING	PBT		WHITE/BLACK	1
NO.	Part Name	MATERIAL	THICK	FINISH	Q' TY

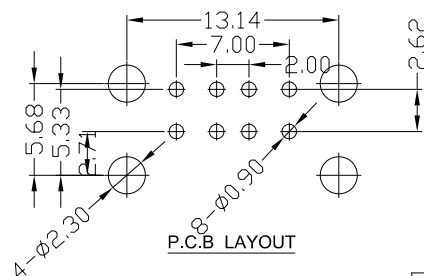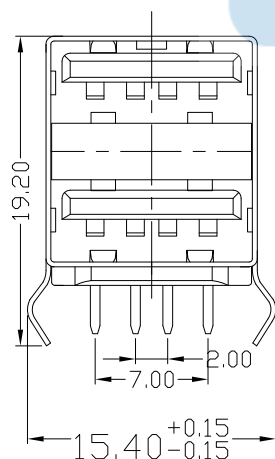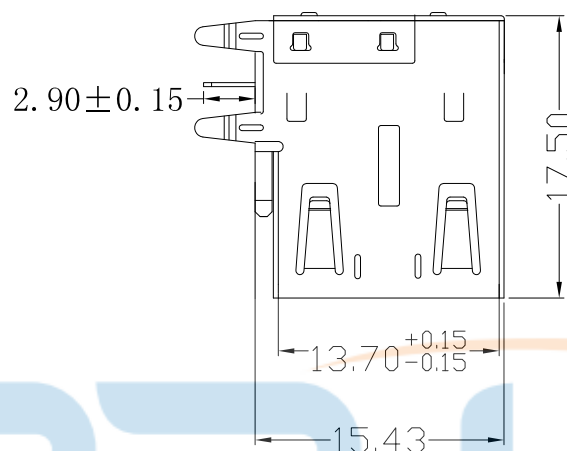

TOLERANCE UNSPECIFIED

. X ± 0.15 X. ± 5°

. XX ± 0.05 . X ± 2°


. XXX ± 0.02 . XX ± 1°

BBJconn 深圳市步步精科技有限公司

TITLE:

USB 2.0 AF 双层 90度L=17.50 带后盖 弯脚 平口 铁壳 PBT黑胶 (DIP)

DRAWN/ DATE	设计	HMY	SIZE:A4	UNIT:MM.	PART. NO:	UB. 01. 12-11-3001
CHECKED/ DATE	审核	LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准	LJP	DWG. PATH		0020-1	SHEET: 页码

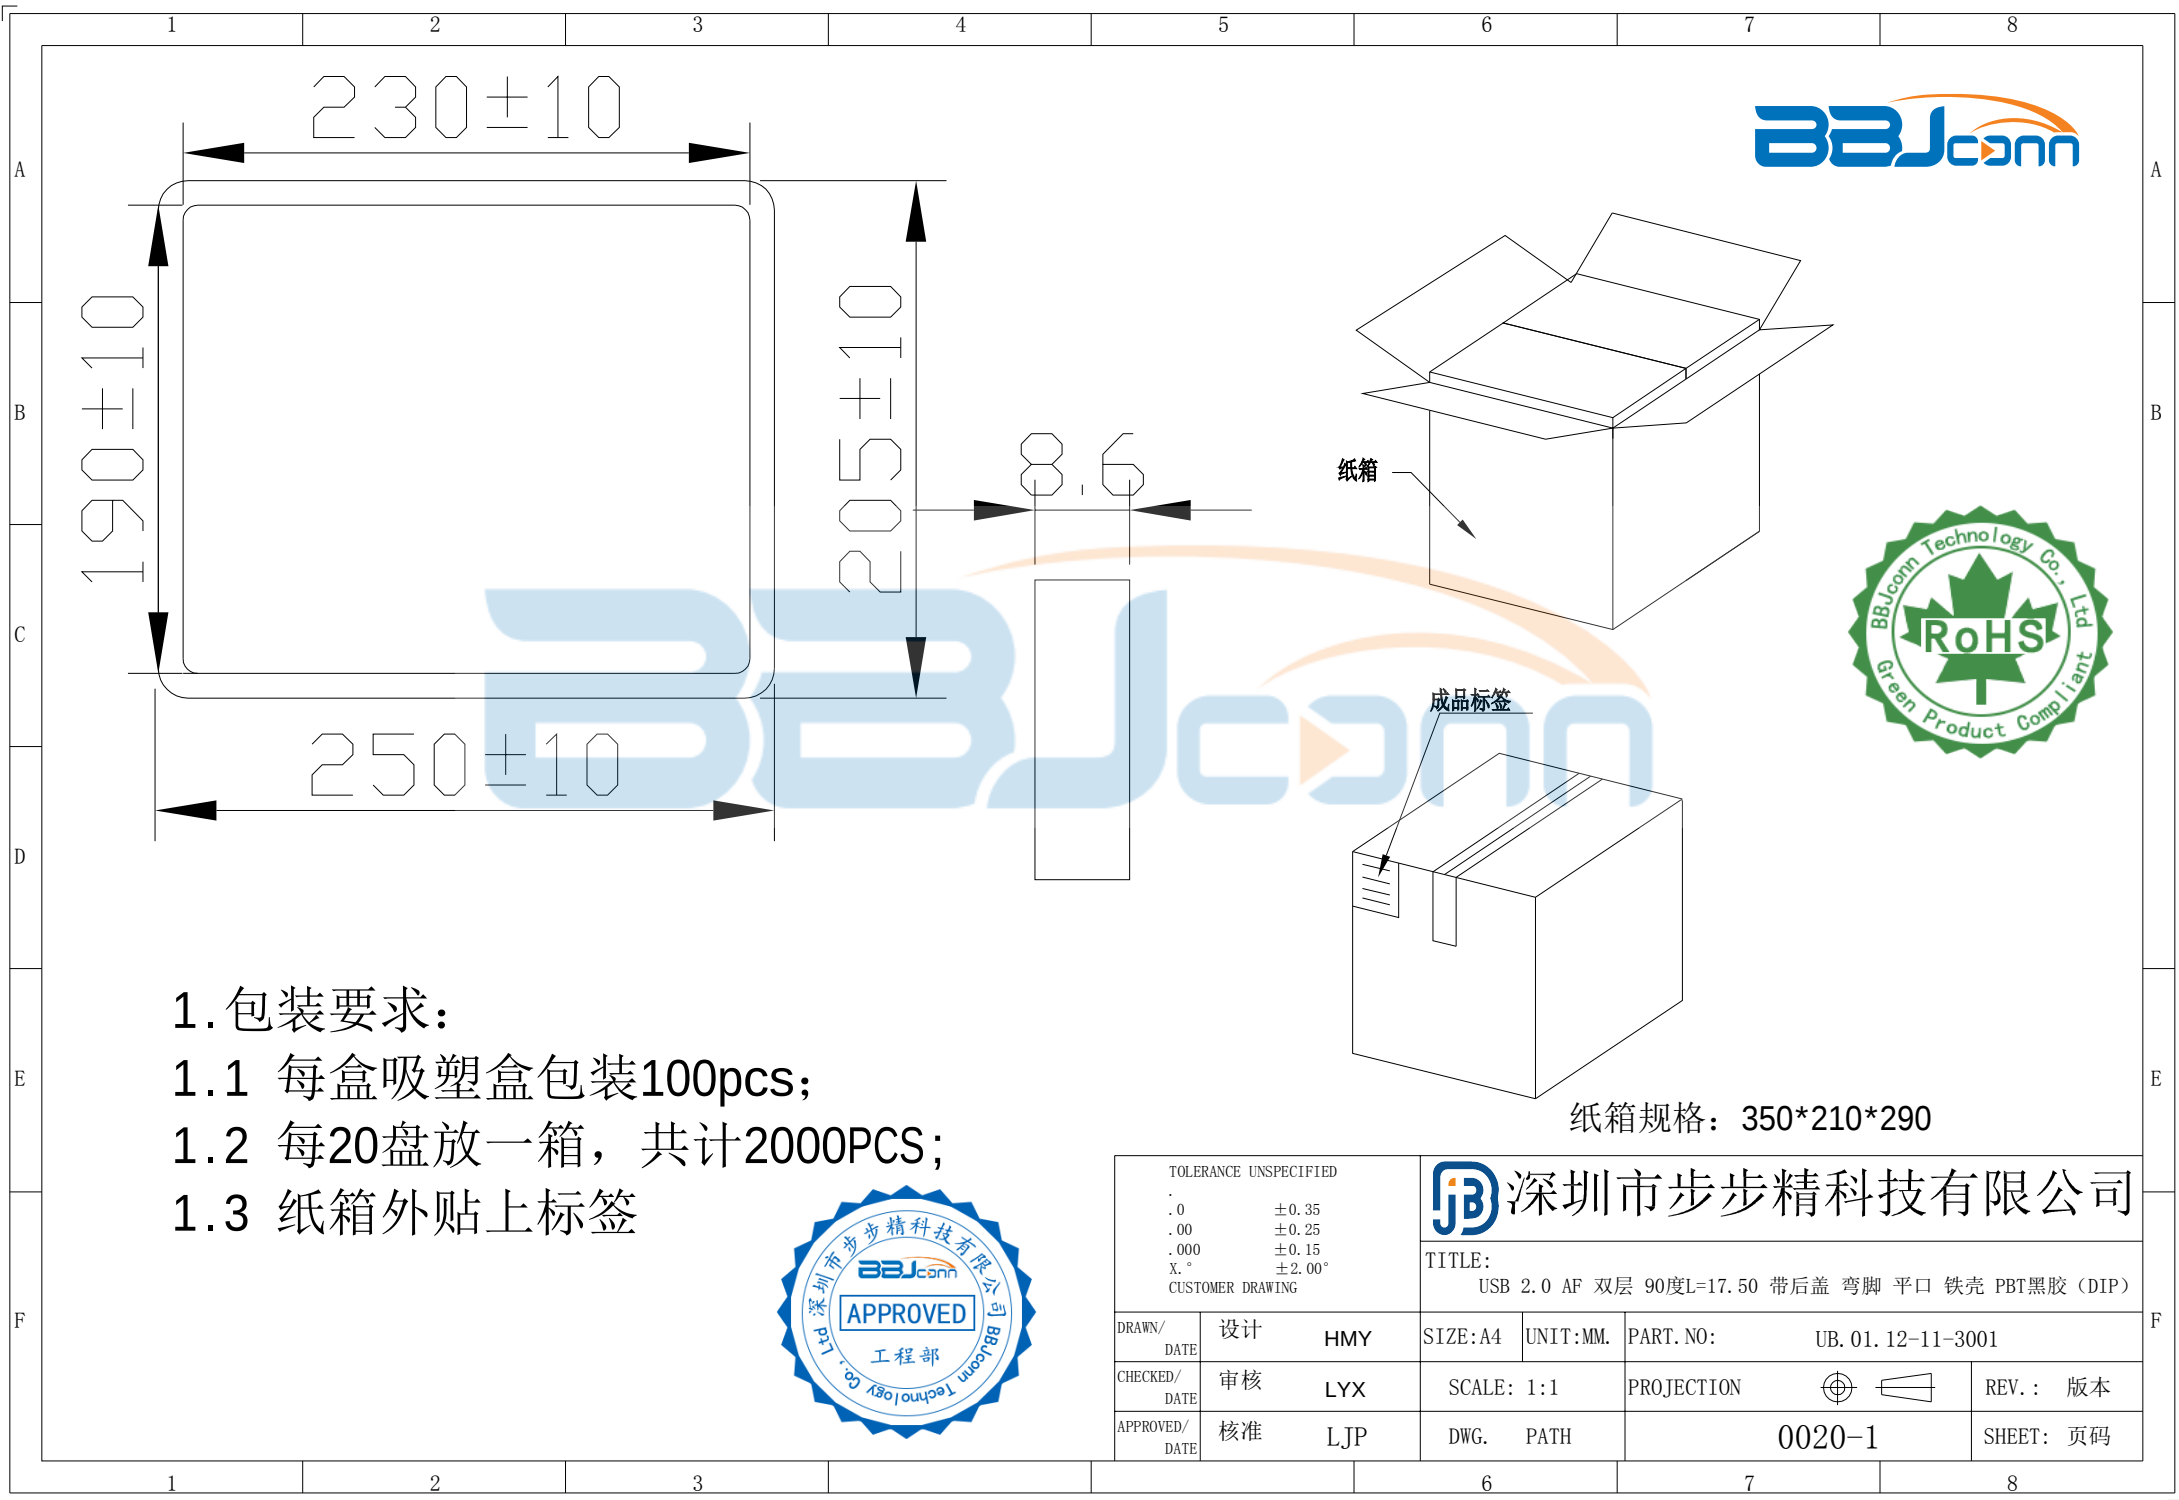

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



TOLERANCE UNSPECIFIED			深圳市步步精科技有限公司			
.0 ±0.35			TITLE:			
.00 ±0.25			USB 2.0 AF 双层 90度L=17.50 带后盖 弯脚 平口 铁壳 PBT黑胶 (DIP)			
.000 ±0.15			DRAWN/	设计	HMY	SIZE:A4
X.° ±2.00°			DATE			UNIT:MM.
CUSTOMER DRAWING			CHECKED/	审核	LYX	PART. NO:
			DATE			UB. 01. 12-11-3001
			APPROVED/	核准	LJP	SCALE: 1:1
			DATE			PROJECTION
						REV.: 版本
						DWG. PATH
						0020-1
						SHEET: 页码