
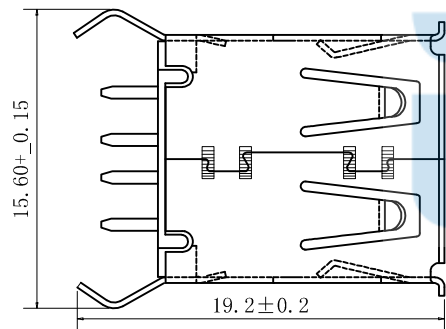



PCB LAYOUT

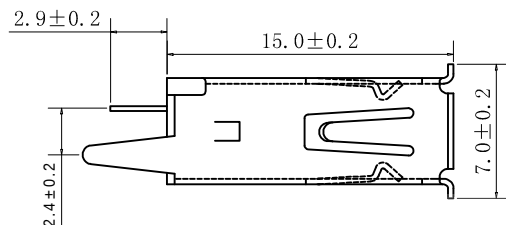

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
3.0A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)

- 端子保持力: Terminal Retention

原材料:Material:

- 塑胶:Housing: PBT
- 外壳:Shell: C2680 /SPCC
Nickel Plating :80u"
- 端子>Contact:Copper Alloy c2680

电镀:Finish:

- 端子>Contact: Plated Gold 0.8u" in Mating Area;
Tin On Solder Tails

TOLERANCE UNSPECIFIED

.X ±0.30
.XX ±0.20
.XXX ±0.10
ANGLES ±2.00°



深圳市步步精科技有限公司

TITLE:

USB 2.0 AF 180度 H=15.0 弯脚直插(DIP) 卷边 PBT白胶 铁壳

DRAWN/ DATE	设计 HMY	SIZE:A4	UNIT:MM.	PART.NO: UB.01.11-21-V008
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1	SHEET: 页码

