



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Level
- 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
- 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料:Material:


- 塑胶:Housing:
Hing Temperature Tnermaplastics,
LCP/PBT
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀40U" (MIN) 锡, 镀金区域镀金1U"

- 外壳:Shell:
铁壳四周镀80U" (MIN) 锡 Nickel Plating

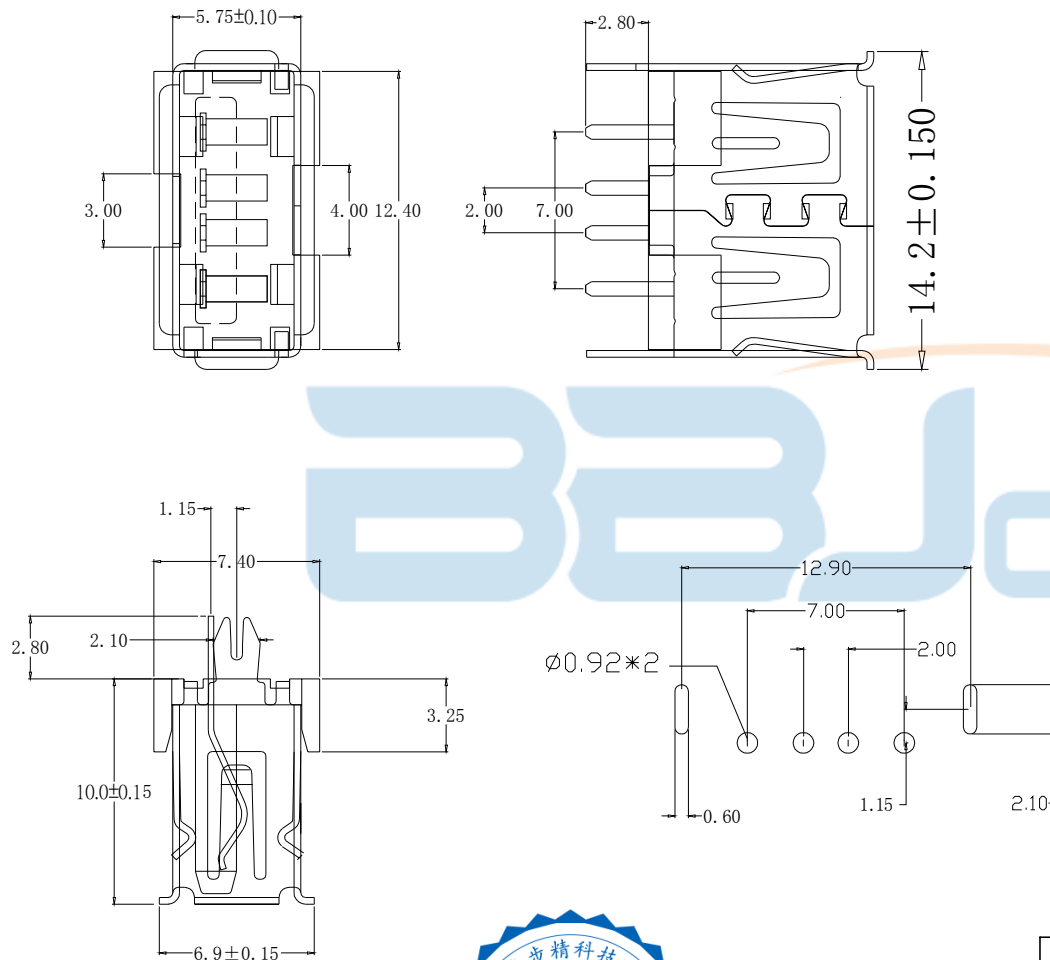

TOLERANCE UNSPECIFIED		深圳市步步精科技有限公司			
.0	±0.35				
.00	±0.25				
.000	±0.15				
X.°	±2.00°				
CUSTOMER DRAWING		TITLE: USB 2.0 AF 180度 直插 H=10.0 卷边 PBT白胶 铁壳			
DRAWN/ DATE	设计 TSP	SIZE:A4	UNIT:MM.	PART.NO: UB.01.11-21-V009	
CHECKED/ DATE	审核 LYX	SCALE: 1:1	PROJECTION	REV.: 版本	
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1	SHEET: 页码	

