



REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levl
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:



1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retenion
1.2kgf(MIN)

原材料:Matiorial:




1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 9T
2. 端子:Contact:Copper Alloy C7025
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

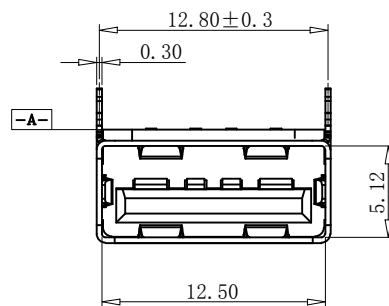

SECTION A-A

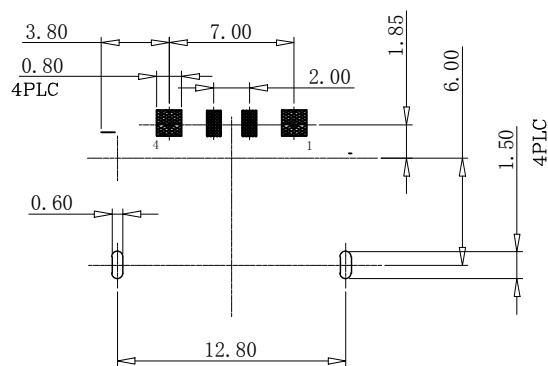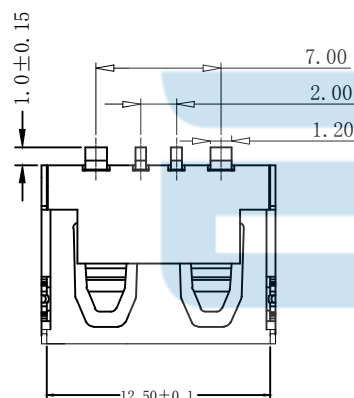

RECOMMENDED PCB LAYOUT
THICKNESS=1.0mm (TOLERANCES ±0.05)



TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°		深圳市步步精科技有限公司		
TITLE: USB2.0 AF90度短体L=10.0 H=6.3 SMT前两脚插平口铜壳 4P大电流(5A) 端子(C7025)脚长1.0MM镀金3u,PA9T绿胶(2286C)				
DRAWN/ DATE	设计 LYX	SIZE:A4	UNIT:MM.	PART. NO: UB.01.12-62-V001
CHECKED/ DATE	审核 HMY	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准 LJP	DWG. PATH	0383-1	SHEET: 页码

