

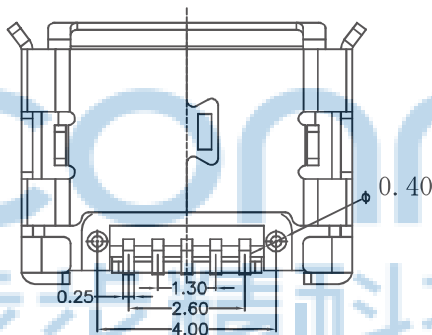
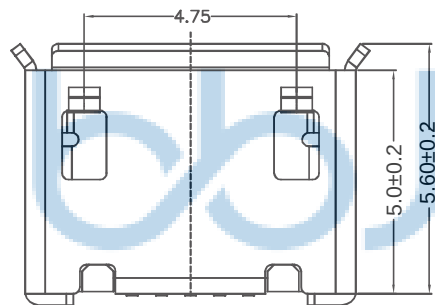

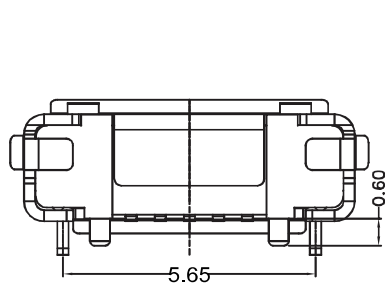




Since 1987

步步精科技

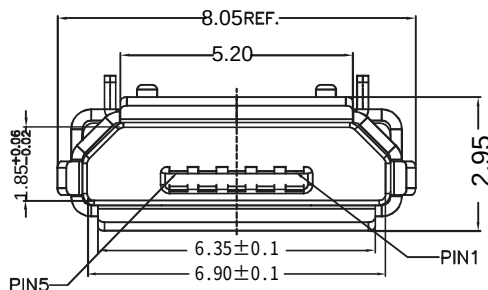


Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0 LCP
- 1.2 Contact: copper alloy,t=0.20mm 接触区镀金1u
- 1.3 Shell: C2680

2.Specification:

- 2.1 Current rating:1,5PIN 1A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kg Max.
- 2.6 Total unmating force: 1.0 Kg Min.
- 2.7 Temperature range: -30°C~80°C

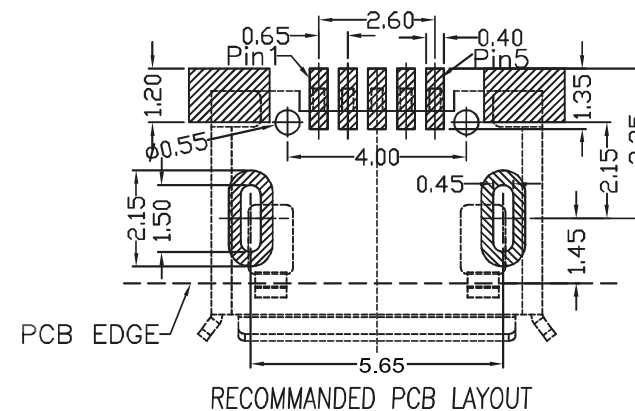

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0113-1



深圳市步步精科技有限公司


.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

X*: ±3*
.X*: ±2*
.XX*: ±1*


NAME:
MICRO-5P 内插有柱卷边亮锡5.65铜壳1.25短脚冷封编带

APPD. JM_Zheng 23/05'02
CHKD. LYX 23/05'02
DR. SGF 23/05'02

PJ. NO.: MC.01.11-21-1001
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

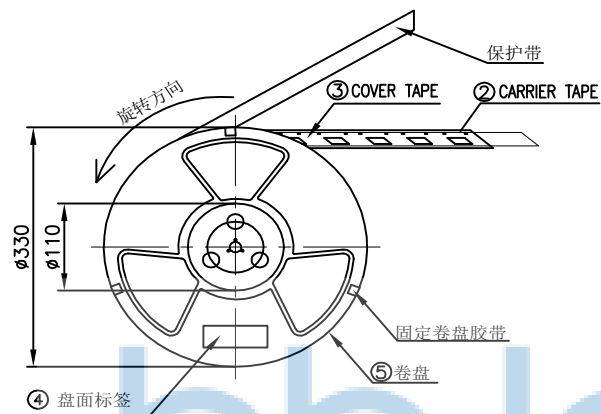



2: 自动机旋转
载带入REEL盘

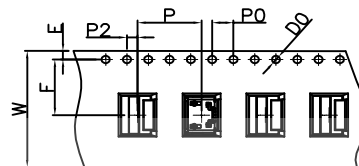


1: 产品平整
放入载带



①



3: 10盘REEL整齐的重叠在一起,
上下各放一个天地板。

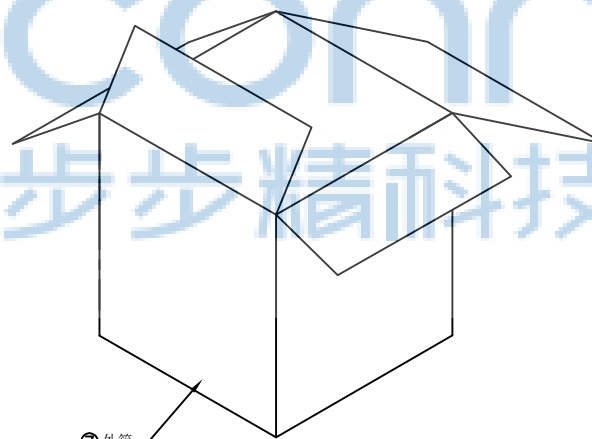

⑦ 外箱

4: 直接装入外箱。



NOTE:

1. QUANTITY/REEL: 1000 PCS

数量/卷: 1000 PCS

QUANTITY/INNER CARTON: 1000 X 10 = 10000 PCS

数量/箱: 1000 X 10 = 10000PCS

2. 产品绕入卷盘后, 外加保护带

1	成品			
2	CARRIER TAPE	PET	W=24mm T=0.30mm	
3	COVER TAPE	PET	W=21.3mm T=0.05mm	18.6
4	标签		59mm*50mm	10
5	卷盘		330mm*W28.5mm	10
7	外箱	K=K	L345mm*W340mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.



深圳市步步精科技有限公司

.X: ±0.38
.XX: ±0.25
.XXX: ±0.13

NAME:
MICRO-5P 内插有柱卷边亮锡5.65铜壳1.25短脚冷封编带

APPD. JM_Zheng 23/05'02
CHKD. LYX 23/05'02
DR. SGF 23/05'02

PJ. NO.: MC.01.11-21-1001
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

ITRM	W	P	F	E	D0	P0	P2
DIM	24.00	12.00	11.50	1.75	1.50	4.00	2.00
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.15 -0.15