

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	








Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0 LCP
- 1.2 Contact: copper alloy,t=0.20mm 接触区镀金1u
- 1.3 Shell: SUS 外壳镀锡50u


2.Specification:

- 2.1 Current rating:1,5PIN 1A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

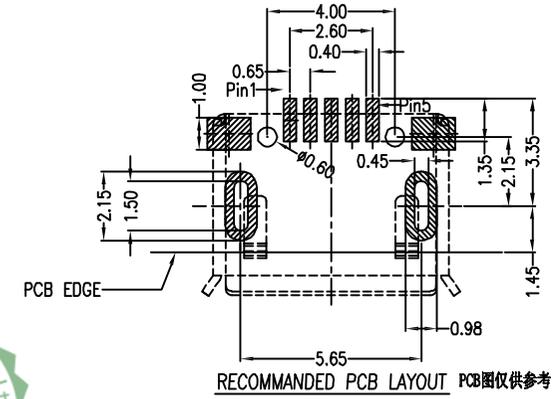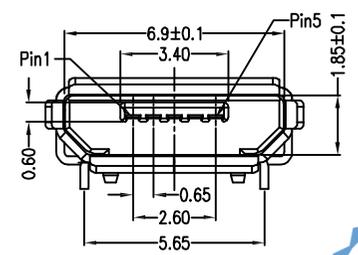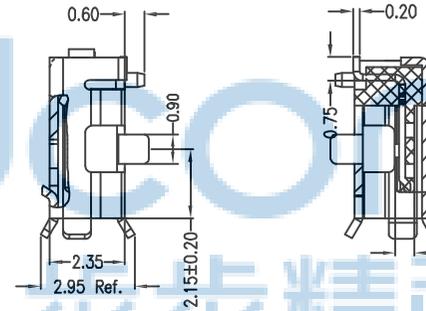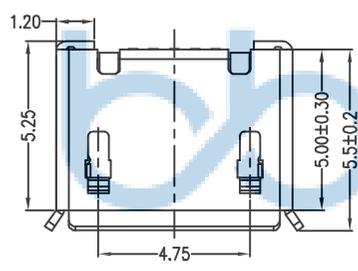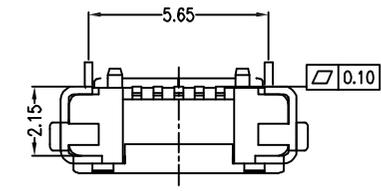

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		深圳市步步精科技有限公司	
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		NAME: MICRO-5P 内插有柱 亮锡 L=5.5 脚距5.65 卷边不锈钢壳	
PDWG.NO: 0113-1	DR. SGF	APPD. JM_Zheng	23/05'02
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A3	UNIT: mm
PAGE: 1/1			

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

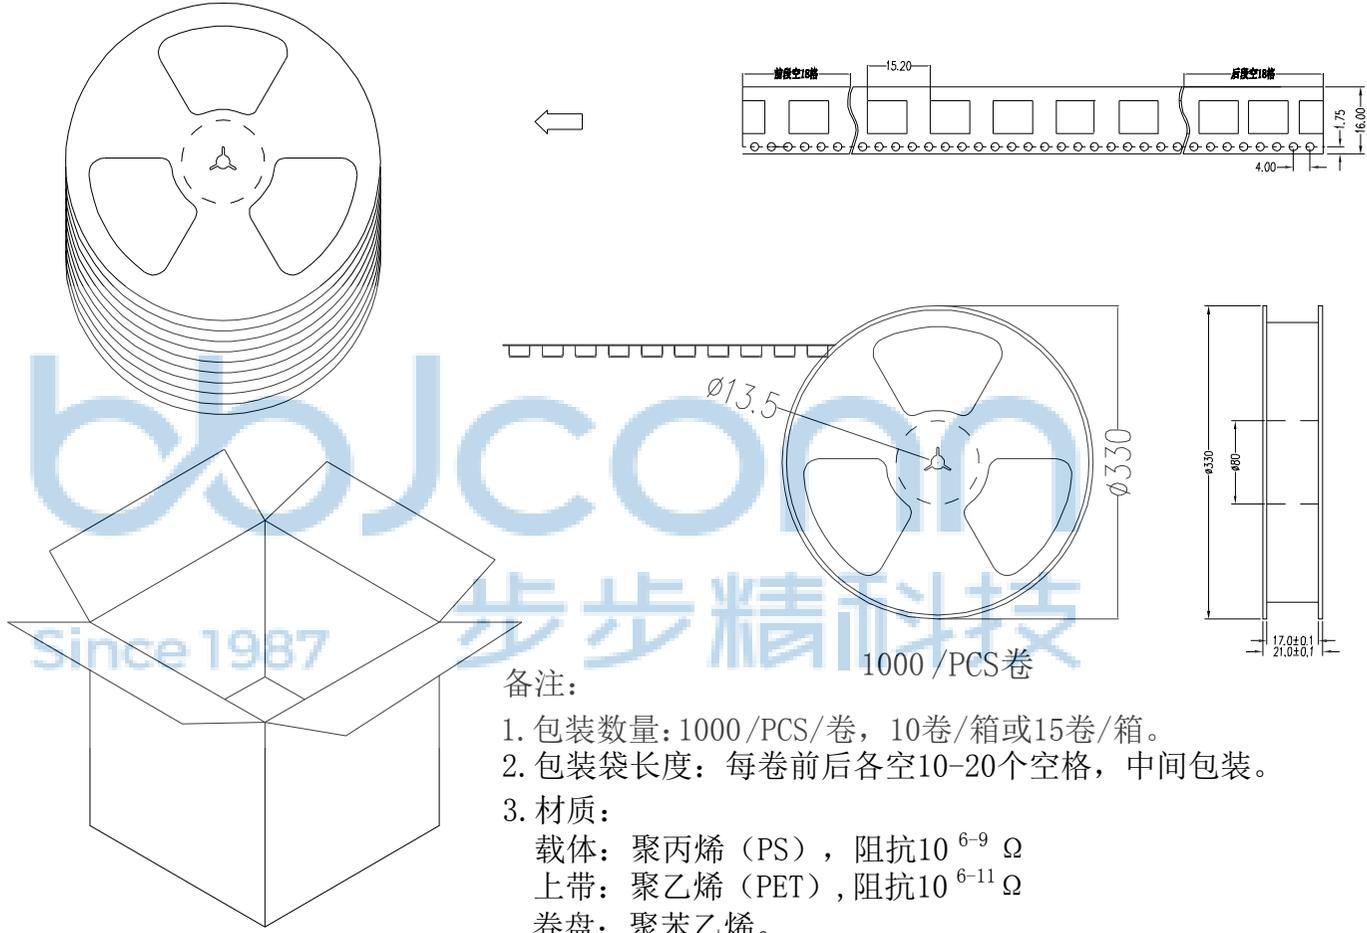

1000 / PCS 卷

备注:

1. 包装数量: 1000 / PCS / 卷, 10 卷 / 箱或 15 卷 / 箱。
2. 包装袋长度: 每卷前后各空 10-20 个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗  $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗  $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .X': ±3" .XX: ±0.25    .X'': ±2" .XXX: ±0.13    .XX': ±1"		NAME: MICRO-5P 内插有柱 亮锡 L=5.5 脚距5.65 卷边不锈钢壳 PJ. NO.: MC.01.11-21-1004 SIZE: A4   DRW NO.: FINISH: SEE NOTES   MAT'L.: SEE NOTES	
PDWG.NO: 0113-1	DR.	SGF	23/05/02	SCALE: N/A	REV.: A3
		UNIT: mm	PAGE: 1 / 1		