



Note:
 1. Material:
 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
 1.2 Contact: copper alloy,t=0.20mm
 1.3 Shell: copper or sus304,t=0.25mm
 2. Specification:
 2.1 Current rating: 1 A Max.
 2.2 Dielectric withstand voltage: 100 V(ac) for 1 min.
 2.3 Contact resistance: 30 MΩ Max.
 2.4 Insulation resistance: 100 MΩ Min.
 2.5 Total mating force: 3.57 Kgf Max.
 2.6 Total unmating force: 1.0 Kgf Min
 2.7 Temperature range: -30°C~80°C

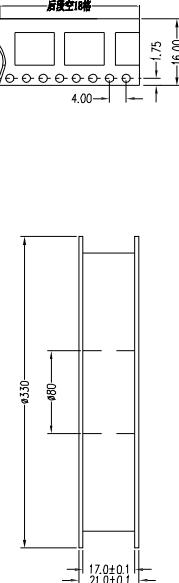

① 端子	PR-0226	1SET	黄铜,T=0.20,镀金
② 主体	PR-0501	1PCS	LCP+30%GF(黑色),UL94-V0;C2680
③ 壳体	PR-0228	1PCS	黄铜 T=0.25mm 镀锡或镀可焊镍
零件	图号	数量	规格

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	.XX: ±0.38	X: ±3°	NAME: MICRO-5P 母座 内插有柱L=5.0 平口 铜壳 冷封端带 固定脚距5.65 铜壳 连续电镀
	.XX: ±0.25	X: ±2°	
	.XXX: ±0.13	XX: ±1°	
APPD.	JM_Zheng	23/05'02	P.J. NO.: MC.01.12-11-1006
CHKD.	LYX	23/05'02	SIZE: A4 DRW NO.:
PDWG.NO:	0113-1	DR.	FINISH: SEE NOTES MAT'L.: SEE NOTES
		SGF	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

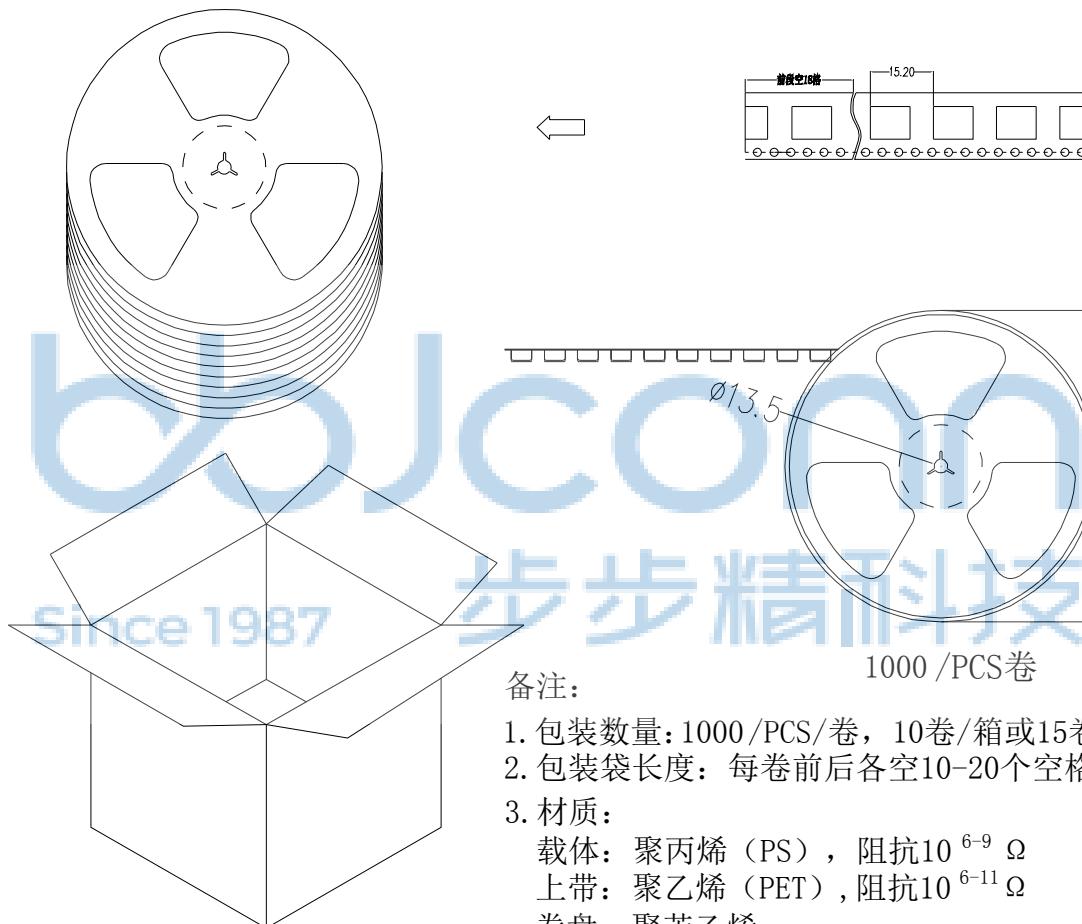

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。

3. 材质:

载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$

上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$

卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0113-1

JM_Zheng 23/05'02
LYX 23/05'02
SGF 23/05'02

.X: ±0.38 X': ±3°
.XX: ±0.25 X': ±2°
.XXX: ±0.13 XX': ±1°
APPD. CHKD. DR. NAME:
NAME: MICRO-5P 母座 内插有柱L=5.0 平口 铜壳 冷封编带 固定脚距5.65 连续电镀
PJ. NO.: MC.01.12-11-1006
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1