
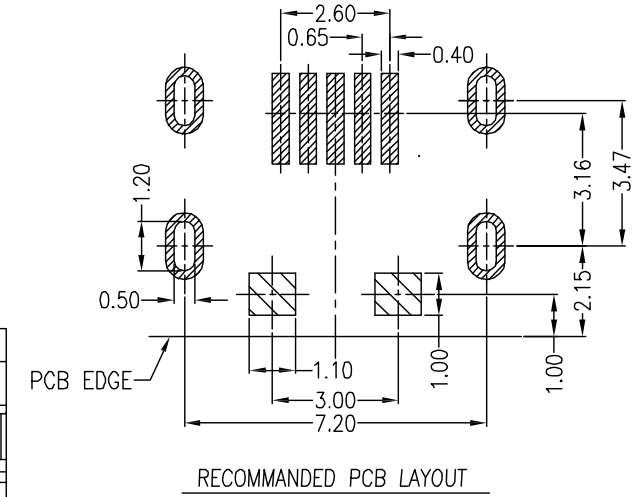

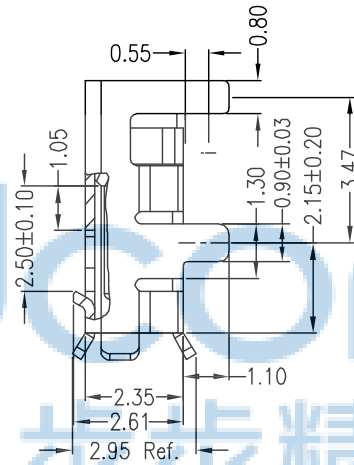
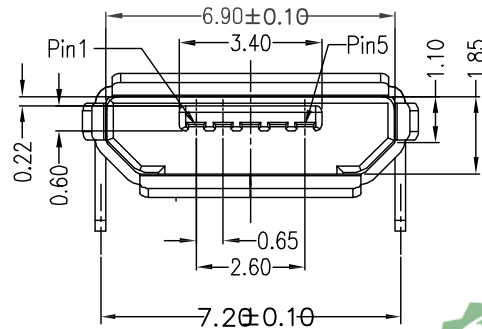
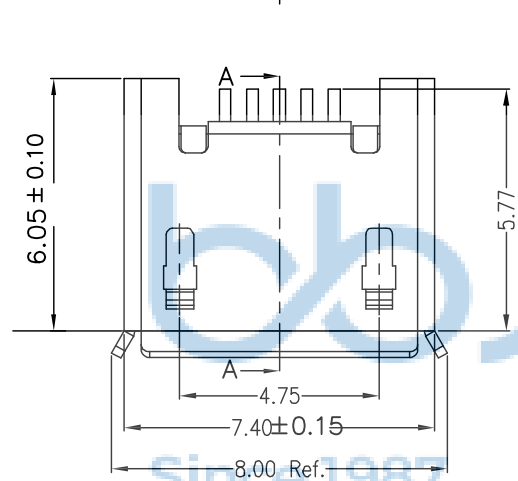


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

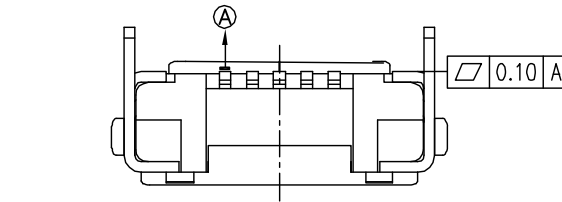

Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm


2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 KgF Max.
- 2.6 Total unmating force: 1.0 KgF Min.0.81~2.05 KgF Min.
- 2.7 Temperature range: -30°C~80°C



SECTION A-A'

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0113-1	DR. SGF	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* .X*: ±2* .XX*: ±1*
APPD. JM_Zheng	23/05'02	NAME: MICRO-5P 四脚插无柱 L=6.05 卷边亮锡 固定脚距7.2 铜壳	
CHKD. LYX	23/05'02	PJ. NO.: MC.01.A1-23-1001	
		SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1

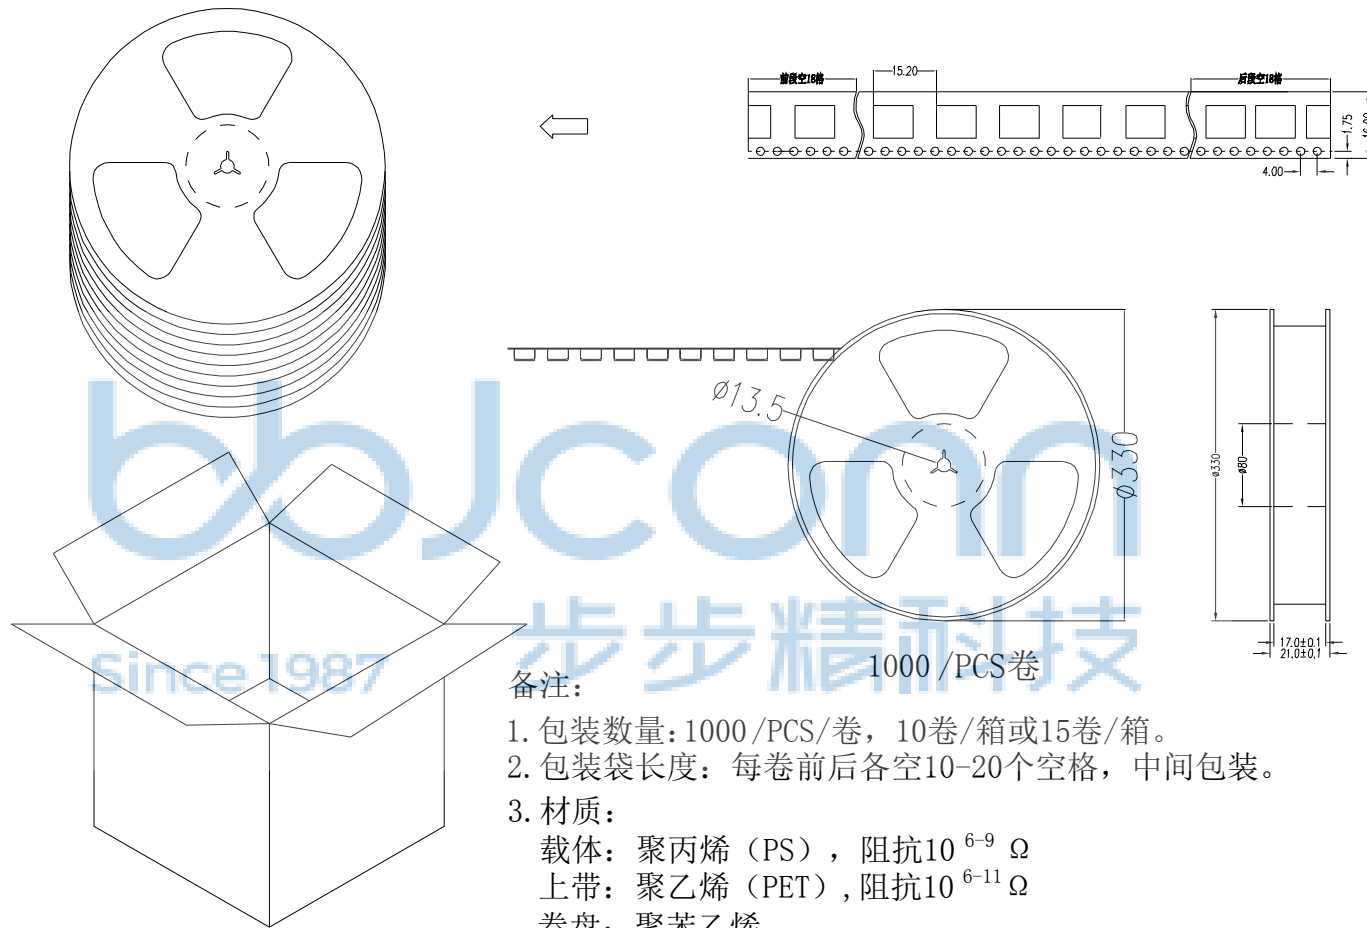


备注:

1. 包装数量: 1000 /PCS / 卷, 10 卷 / 箱或 15 卷 / 箱。
2. 包装袋长度: 每卷前后各空 10-20 个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM
纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X': ±3" .X': ±2" .XX': ±1"	NAME: MICRO-5P 四脚插无柱 L=6.05 卷边亮锡 固定脚距7.2 铜壳	
APPD.	JM_Zheng 23/05'02	PJ. NO.: MC.01.A1-23-1001	
CHKD.	LYX 23/05'02	SIZE: A4 DRW NO.:	
DR.	SGF 23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0113-1		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1