

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

备注:

1. 产品规格:








- 1-1. 插入力: 35N MAX.
- 1-2. 拔出力: 10N MIN. INITIAL 8N MIN AFTER TESTED
- 1-3. 额定电流: 1.0A
- 1-4. 额定电压: 30V
- 1-5. 耐久性: 10000 CYCLES MIN.
- 1-6. 耐电压: 100V AC MIN.
- 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER TESTED
- 1-8. 绝缘电阻: 100MΩ MIN
- 1-9. 工作温度: -30° TO +80°

2. 材质:

- 2.1 胶芯: LCP-BLACK, UL94V-0
- 2.2 端子: C5191, 镍底, 镀金 1 μ"
- 2.3 外壳: SUS304, 表面镀雾锡/镀镍




加CAP示意图 (SCAL 2:1)

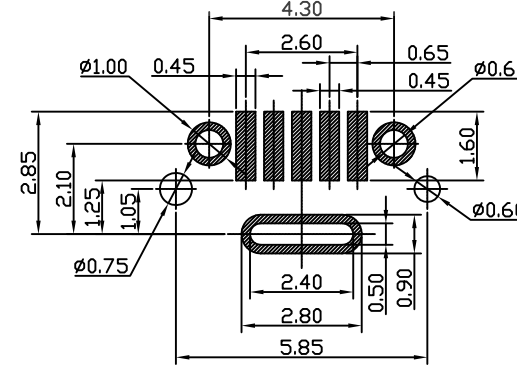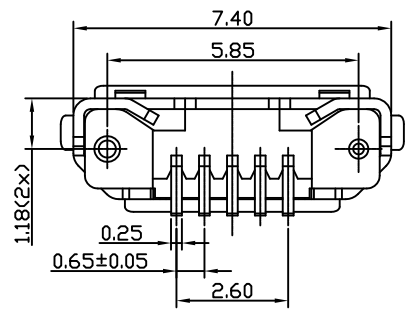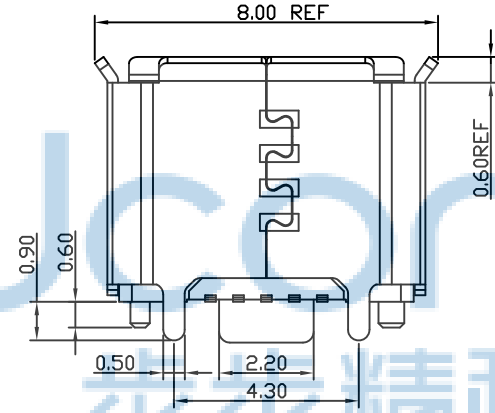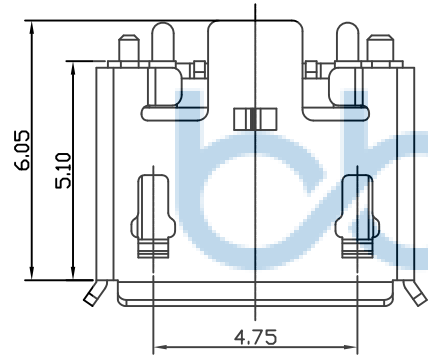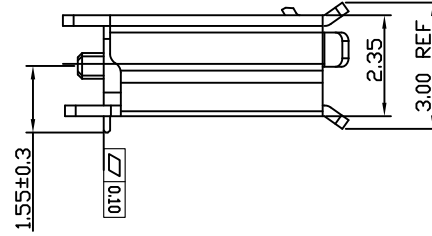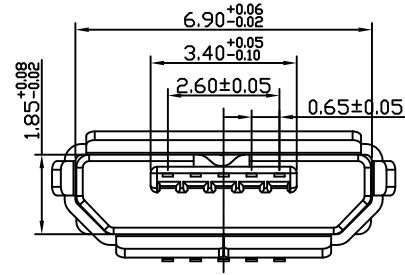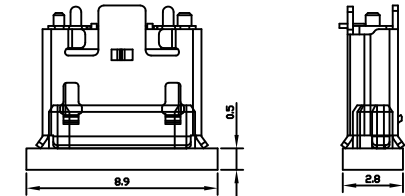

PCB LAYOUT(TOP VIEW)
TOL: ±0.05

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
PDWG. NO: 0113-1		DR. SGF		23/05'02		NAME: MICRO-5P 母座 直立式三脚插带柱H=5.10SMT卷边亮锡不锈钢外壳	
APPD. JM_Zheng		23/05'02		PJ. NO.: MC.01.C1-21-1002		SIZE: A4 DRW NO.:	
CHKD. LYX		23/05'02		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A3		UNIT: mm		PAGE: 1/1	

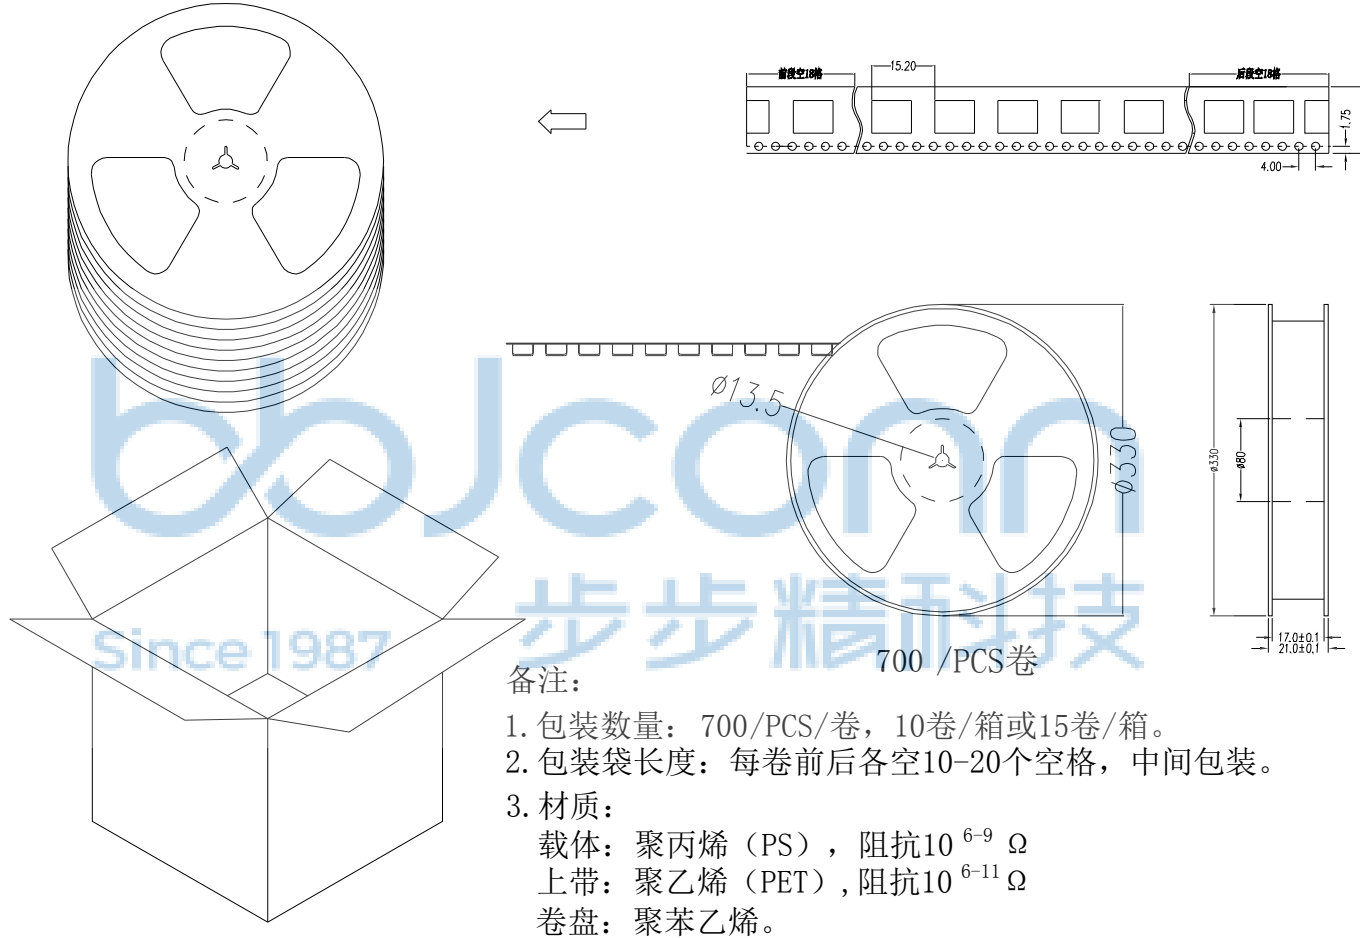

备注:

1. 包装数量: 700/PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*	
NAME:		MICRO-5P 母座 直立式三脚插带柱H=5.10SMT卷边亮锡不锈钢外壳	
APPD.		JM_Zheng 23/05'02	
CHKD.		LYX 23/05'02	
PDWG.NO: 0113-1		DR. SGF 23/05'02	
P.J. NO.: MC.01.C1-21-1002		SIZE: A4 DRW NO.:	
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A		REV.: A3 UNIT: mm PAGE: 1/1	