

REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

A

B

C

D

E








A

B


C

D

E

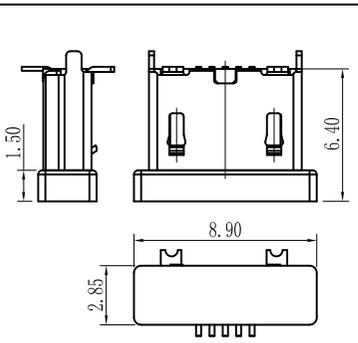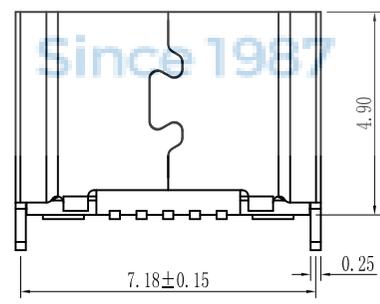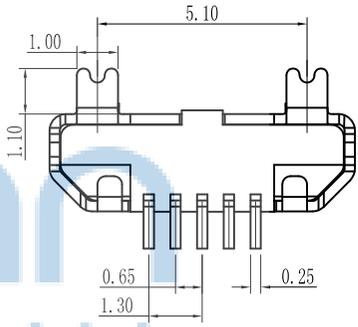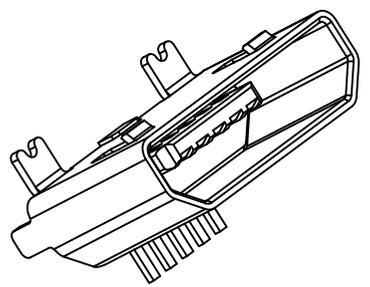

盖上盖子后尺寸规格  
SCALE 2:1

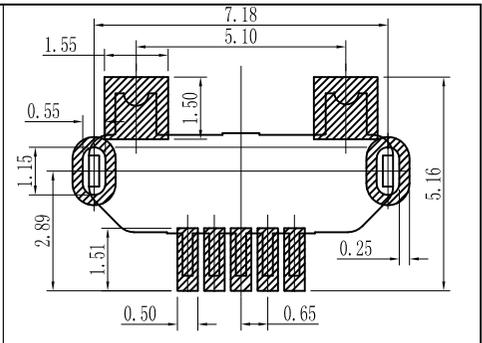

PCB参考图








MICRO USB技术要求:

1. 电气性能
  - 1.1 额定电流 2A.
  - 1.2 额定电压: 5V.
  - 1.3 耐压: 500 V(AC) for 1 min.
  - 1.4 接触阻抗: 30 mΩ Max.  
可靠性和环境测试后阻抗变化不得超过10mΩ.
  - 1.5 绝缘阻抗: 100 MΩ min.
2. 机械性能
  - 2.1 插入力: 5~20N. 拔出力: 5~20N.
  - 2.2 寿命测试: 3000 cycles.
  - 2.3 推力: 50N min.
  - 2.4 剥离强度: 150N min.
3. 材料要求
  - 3.1 胶芯材料: LCP 黑色
  - 3.2 外壳材料: C2680/SPCC 镀雾锡50u"镍底50u
  - 3.3 端子材料: C2680 镀金1u
4. 工作温度: -20° C~85° C

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X*: ±3* X*: ±2* XX*: ±1*		NAME: MICRO 5P 直立式 H=5.0 SMT 平口 铜壳(固定脚两插两贴)
APPD.	JM_Zheng	23/05'02	PJ. NO.: MC.01.C2-11-1001	
CHKD.	LYX	23/05'02	SIZE: A4 DRW NO.:	
PDWG.NO:	0113-1	DR.	FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

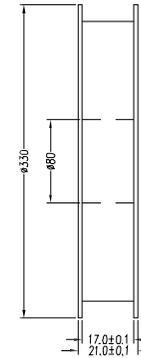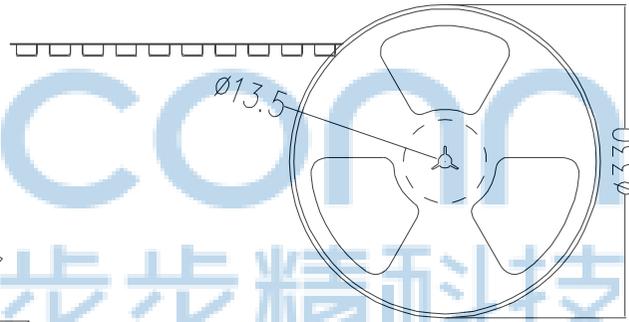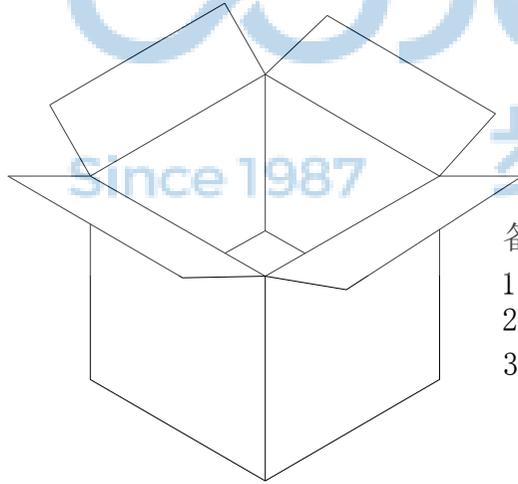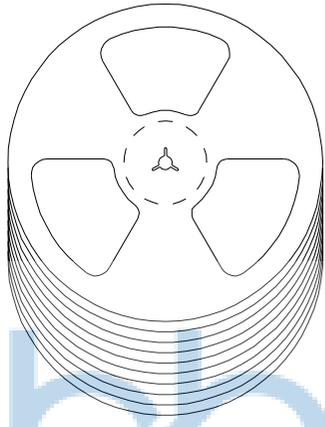

700/PCS卷

备注:

1. 包装数量:1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM

纸箱规格: 345\*345\*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38    .XX: ±0.25    .XXX: ±0.13 X': ±3"    X'': ±2"    XX': ±1"		NAME: MICRO 5P 直立式 H=5.0 SMT 平口 铜壳 (固定脚两插两贴)
APPD.	JM_Zheng	23/05/02	PJ. NO.: MC.01.C2-11-1001 SIZE: A4   DRW NO.:	
CHKD.	LYX	23/05/02	FINISH: SEE NOTES    MAT'L.: SEE NOTES SCALE: N/A    REV.: A3    UNIT: mm    PAGE: 1/1	
PDWG.NO:	0113-1	DR.	SGF    23/05/02	