


1. VOLTAGE RATING: 30V AC
2. CURRENT RATING: WHEN APPLYING CURRENT ONLY TO SIGNAL TERMINALS:
  - 1.0A (FOR TERMINAL NO. 2, 3 AND 4)
  - WHEN APPLYING CURRENT ONLY TO POWER TERMINALS:
    - 1.8A (FOR TERMINAL NO. 1 AND 5)
    - 0.5A (FOR TERMINAL NO. 2, 3 AND 4)
3. INSULATION RESISTANCE: 100M MINIAT 100V DC
4. DIELECTRIC WITHSTANDING VOLTAGE: 100V (r. m. s) AC FOR 1 MINUTE
5. CONTACT RESISTANCE: 30m MAX.
6. OPERATING TEMPERATURE: -30 TO +80°C



|                                                                                                                                                                                                 |                                                                                                    |                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| THIS DOCUMENT IS THE<br>SOLE PROPERTY OF<br>BBJconn Technology Co.,Ltd.<br>Corporation AND SHOULD<br>NOT BE USED IN WHOLE<br>OR IN PART WITHOUT<br>PRIOR WRITTEN PERMISSION.<br>PDWG.NO: 0526-1 |  深圳市步步精科技有限公司 |                                                                                                                                        |
|                                                                                                                                                                                                 | .X: ±0.38<br>.XX: ±0.25<br>.XXX: ±0.13                                                             | X*: ±3*<br>.X*: ±2*<br>.XX*: ±1*                                                                                                       |
|                                                                                                                                                                                                 | NAME:<br>MICRO 5P 母座 L=5.00 内插有柱 脚距5.70 端子SMT 卷边 雾锡 不锈钢外壳                                          |                                                                                                                                        |
|                                                                                                                                                                                                 | APPD. JM_Zheng 23/05'02                                                                            |  PJ. NO.: MC.01.21-11-J003<br>SIZE: A4   DRW NO.: |
|                                                                                                                                                                                                 | CHKD. LYX 23/05'02                                                                                 | FINISH: SEE NOTES   MAT'L.: SEE NOTES<br>SCALE: N/A   REV.: A3   UNIT: mm   PAGE: 1/1                                                  |
|                                                                                                                                                                                                 | DR. SGF 23/05'02                                                                                   |                                                                                                                                        |

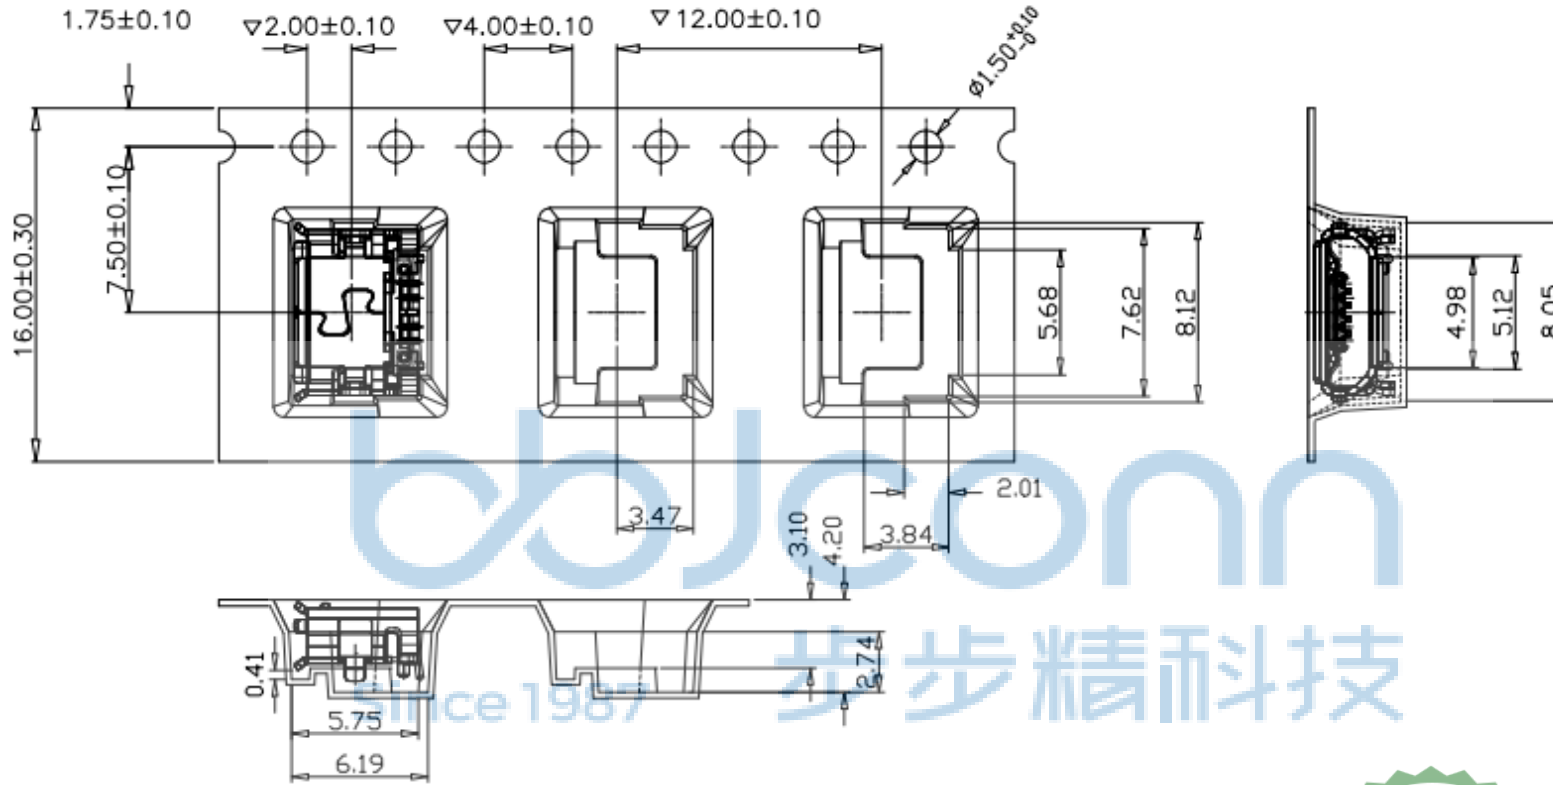

**NOTE:**

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$ .
2. Carrier camber is within 1mm Max. in 250mm.
3. All dimensions meet EIA-481-D requirements.
4. Material: Polystyrene
5. Thickness:  $0.3 \pm t$
6. Recommend hub diameter: \_\_\_\_\_ mm.
7. Packing length per 22" reel: \_\_\_\_\_ Meters; per 13" reel: 12.5 Meters.
8. Component load per 13" reel: 1500 pcs.

|      |                       |
|------|-----------------------|
| 封箱方式 | 顶部、底部“一”字封箱法          |
| 标签   | 贴外箱标签, 并在外箱标签上编序号     |
| 圆盘   | 13"16宽普通, 横着放         |
| 纸箱   | 345*345*355 纸箱; 16R/箱 |
| 项目   | 要求                    |

|                                                                                                                                                             |  |          |  |                           |  |                                                        |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------|--|---------------------------|--|--------------------------------------------------------|--|
| THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  |          |  | 深圳市步步精科技有限公司              |  |                                                        |  |
| PDWG.NO: 0526-1                                                                                                                                             |  | DR. SGF  |  | 23/05/02                  |  | NAME: MICRO 5P 母座 L=5.00 内插有柱 脚距5.70 端子SMT 卷边 雾锡 不锈钢外壳 |  |
| APPD. JM_Zheng                                                                                                                                              |  | 23/05/02 |  | PJ. NO.: MC.01.21-11-J003 |  | SIZE: A4 DRW NO.:                                      |  |
| CHKD. LYX                                                                                                                                                   |  | 23/05/02 |  | FINISH: SEE NOTES         |  | MAT'L.: SEE NOTES                                      |  |
| SCALE: N/A                                                                                                                                                  |  | REV.: A3 |  | UNIT: mm                  |  | PAGE: 1/1                                              |  |