
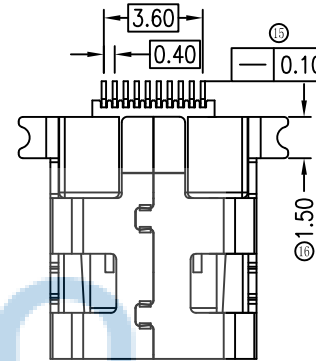
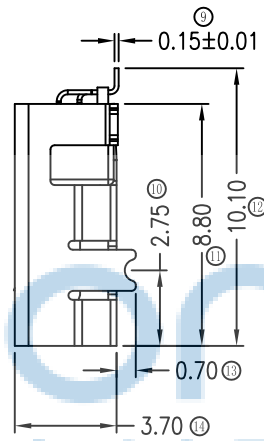
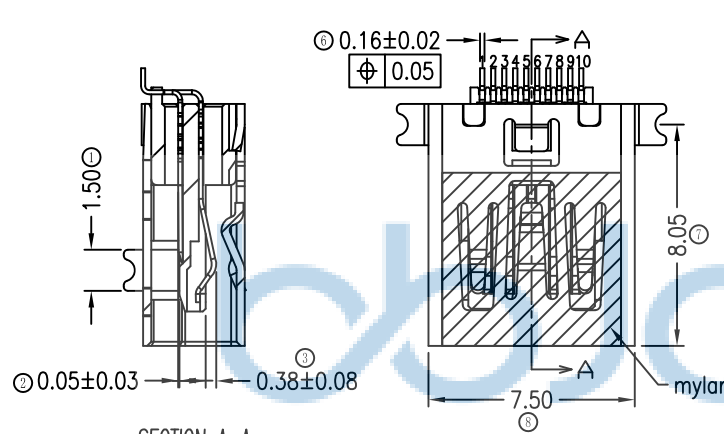


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	

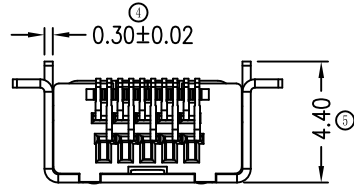


备注:

1. 材质:
- 1.1 胶芯: LCP/PBT UL94V-0
- 1.2 端子: C5210, 镀金G/F
- 1.3 外壳: C2680, 镀雾锡50μ"以上或外壳镀全镍50μ"以上
2. 主要特性:
- 2.1 额定电流: 1.0A
- 2.2 接触阻抗: 50mΩ MAX
- 2.3 绝缘阻抗: 100MΩ MIN 100V DC
- 2.4 耐压测试: 100V AC
- 2.5 沾锡性: 温度235±5℃, 时间5±0.5s
- 2.6 整体插入力: 3.57kgf MAX 整体拔出力: 0.71kgf MIN
- 2.7 使用寿命: 3000次
- 2.8 耐温性: 烤箱测试: 温度250±5℃, 时间2分钟
- 2.9 工作环境: 温度: -30℃~+80℃; 湿度: 80% MAX
- 3.0 圆圈标记尺寸表示重点检验尺寸, CPK值不小于1.33。

SECTION A-A
SCALE 1:1


Since 1987

步步精科技


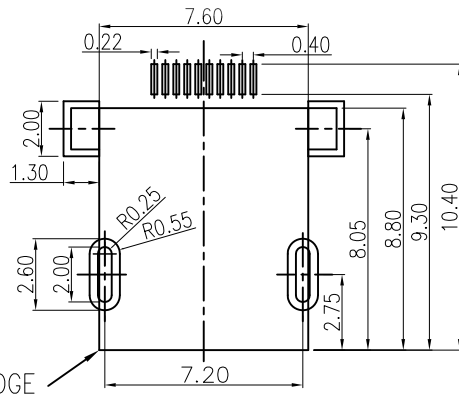


PCB EDGE

RECOMMENDED PCB LAYOUT

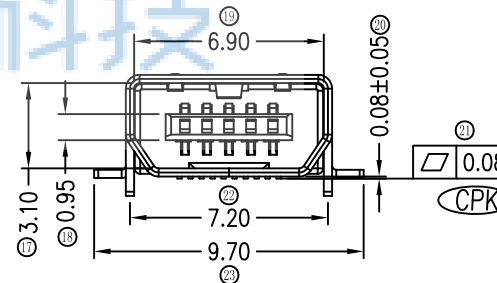

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'': ±1"		NAME: MINI USB-10P 母座 L=8.80 无柱 贴麦拉 前插后贴 平口 铜壳			
APPD. JM_Zheng		23/05'02		PJ. NO.: UB.07.52-12-W001			
CHKD. LYX		23/05'02		SIZE: A4 DRW NO.:			
PDWG.NO: 0113-1		DR. SGF		23/05'02		FINISH: SEE NOTES	
						MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A3	
				UNIT: mm		PAGE: 1/1	

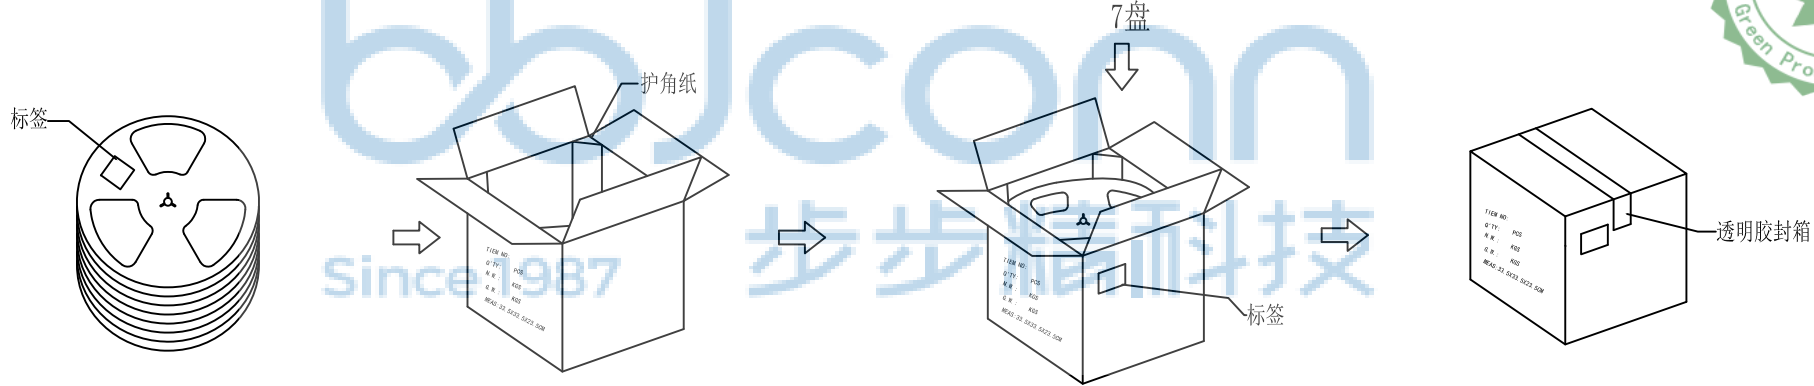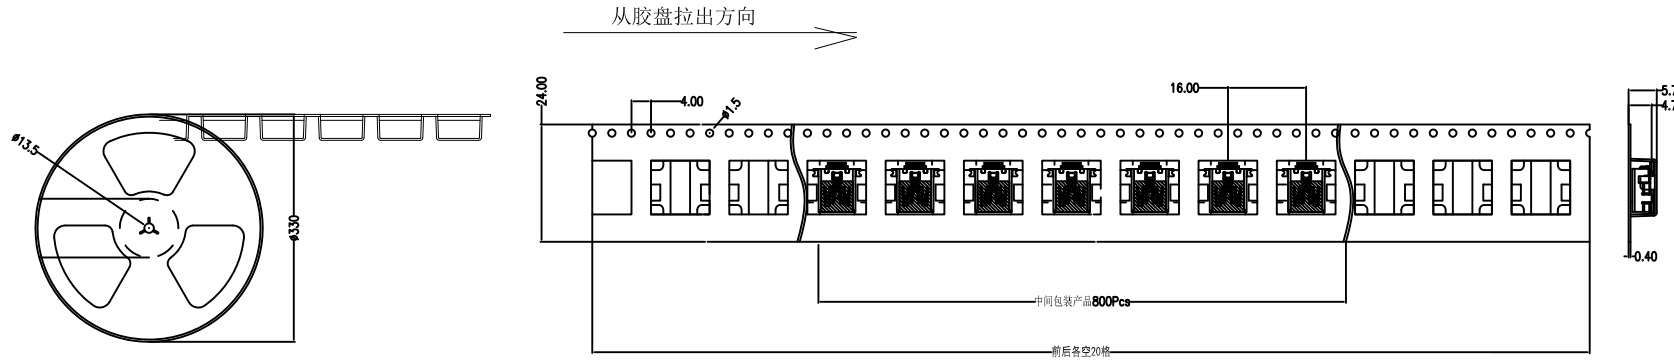

5. 6K/箱 纸箱规格:335*335*235mm

1. 每盘首尾空缺如图, 中间包装800PCS.
2. 每箱包装7盘, 共包装5600PCS.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.				深圳市步步精科技有限公司			
Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				NAME: MINI USB-10P 母座 L=8.80 无柱 贴麦拉 前插后贴 平口 铜壳			
PDWG.NO: 0113-1				PJ. NO.: UB.07.52-12-W001			
DR. SGF				SIZE: A4 DRW NO.:			
				FINISH: SEE NOTES MAT'L.: SEE NOTES			
				SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1			