

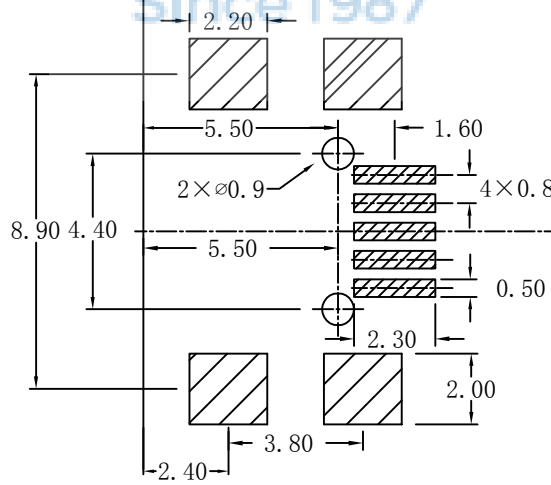
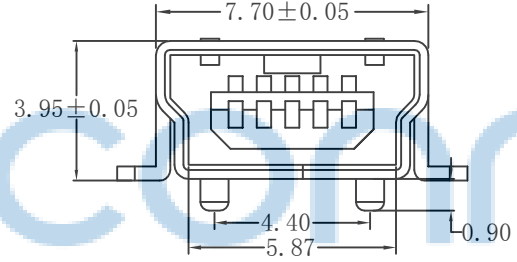
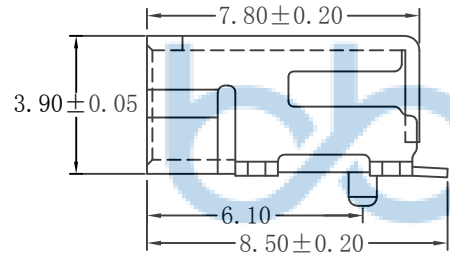


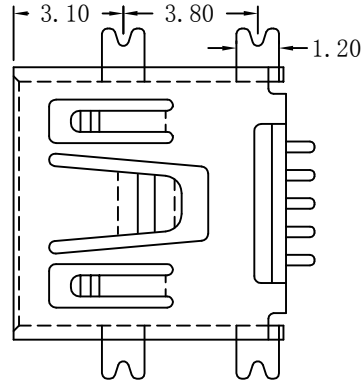

RECOMMENDED PCB LAYOUT

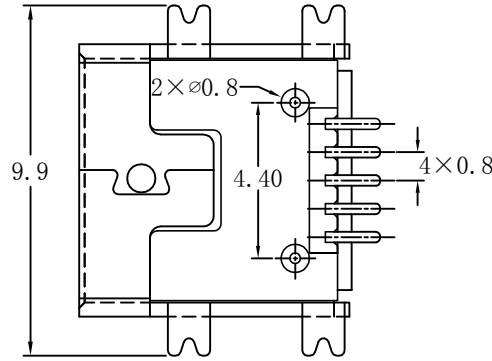

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.0A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
50 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料: Raw material:


- 塑胶: Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
- 端子: Contact: Copper Alloy C2680/C5191
- 外壳: Shell: Copper Alloy C2680

电镀: Electroplate:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- 外壳: Shell:
Nickel Plating



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0064-2		深圳市步步精科技有限公司				NAME: MINI USB 5P 母座 短体L=7.80 四脚全贴 带柱 SMT LCP黑胶 铜壳	
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* .XX*: ±1*			PJ. NO.: UB.07.22-12-9006
	APPD.	JM_Zheng	23/05'02		SIZE: A4 DRW NO.:		
	CHKD.	LYX	23/05'02		FINISH: SEE NOTES MAT'L.: SEE NOTES		
	DR.	SGF	23/05'02		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1		

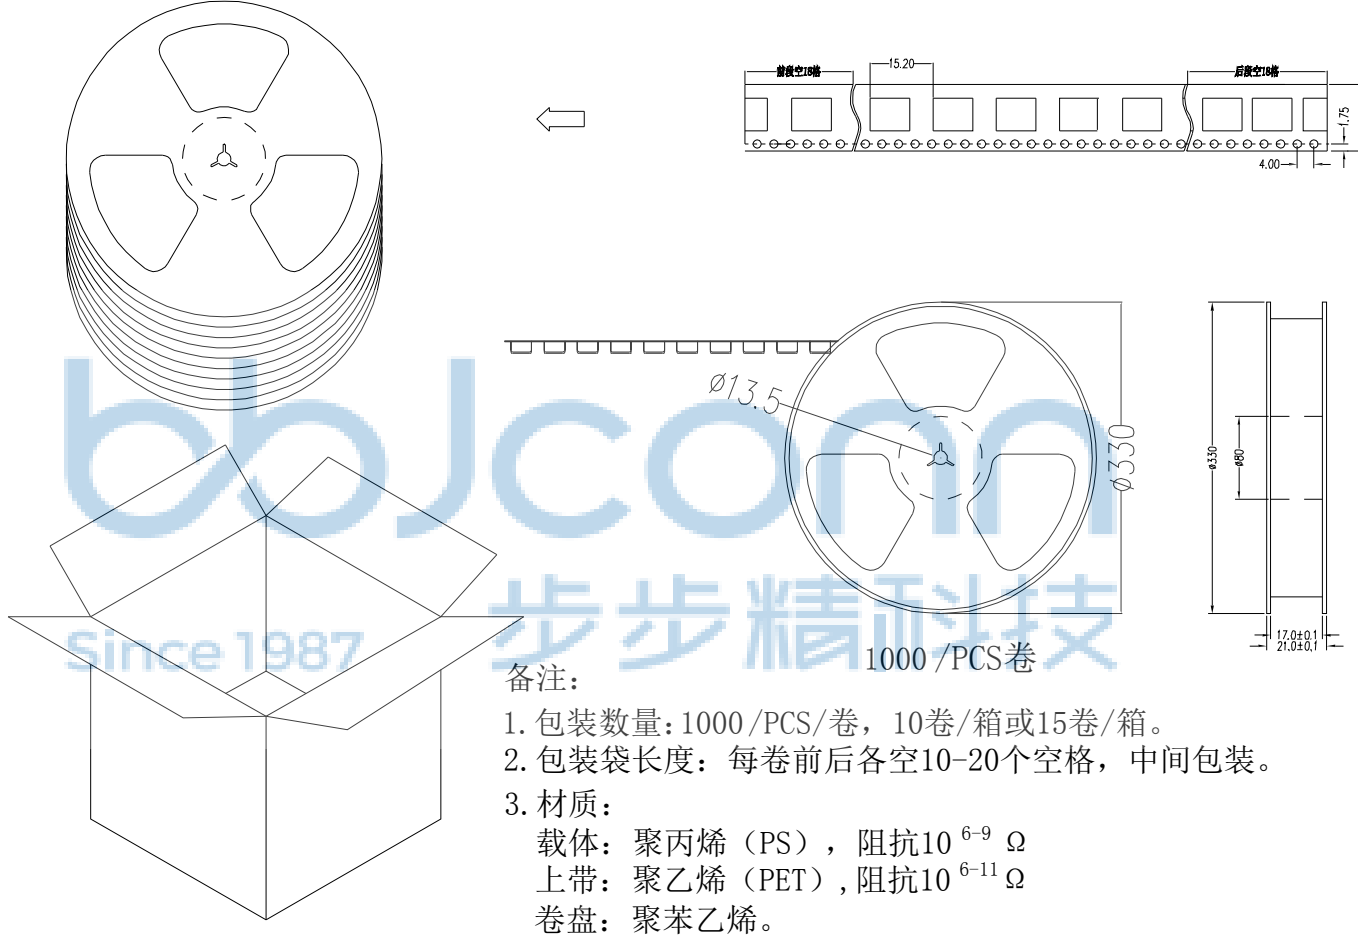

备注:

1. 包装数量: 1000 /PCS/ 卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$
卷盘: 聚苯乙烯。

纸箱规格: 345*345*23MM

纸箱规格: 345*345*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13		X*: $\pm 3'$.X*: $\pm 2'$.XX*: $\pm 1'$		NAME: MINI USB 5P 母座 短体L=7.80 四脚全贴 带柱 SMT LCP黑胶 铜壳			
APPD.	JM_Zheng	23/05'02	PJ. NO.: UB.07.22-12-9006		SIZE: A4 DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES		MAT'L.: SEE NOTES		
PDWG.NO:	0064-2	DR.	SGF	23/05'02	SCALE: N/A	REV.: A3	UNIT: mm PAGE: 1/1