
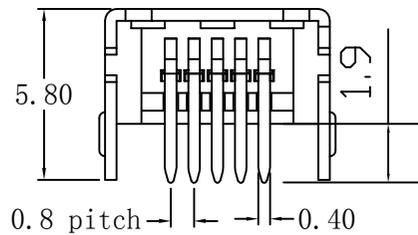


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	



规格说明: Specifications:

电气特性: Electrical:





1. 额定电流: Current Rating  
1.0A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗: Contact Resistance  
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:  
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:  
100MEGA ohms MIN

原材料: Raw material:

1. 塑胶: Plastic cement:  
Hing Temperature Thermoplastics,  
LCP Black
2. 端子: Contact: Copper Alloy C2680/C5191
3. 外壳: Shell: Copper Alloy C2680

电镀: Electroplate:

1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
2. 外壳: Shell:  
Nickel Plating

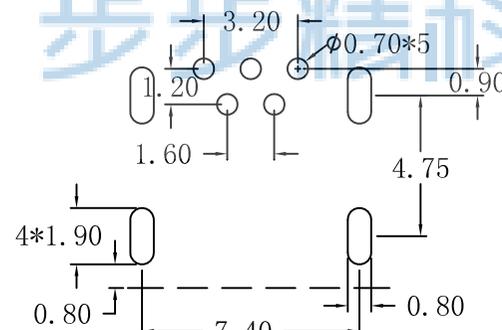

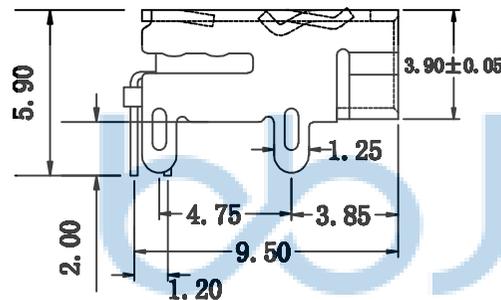


RECOMMENDED PCB LAYOUT



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b>	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3* .X*: ±2* XX*: ±1*	
NAME:	MINI 5P B型 四脚插 L=9.7 DIP 铜壳		
APPD.	JM_Zheng	23/05'02	PJ. NO.: UB.07.12-12-9002
CHKD.	LYX	23/05'02	SIZE: A4   DRW NO.:
PDWG.NO:	0064-2	DR.	SGF 23/05'02
FINISH: SEE NOTES		MAT'L.: SEE NOTES	
SCALE: N/A	REV.: A3	UNIT: mm	PAGE: 1/1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

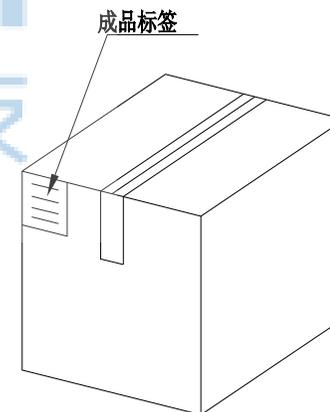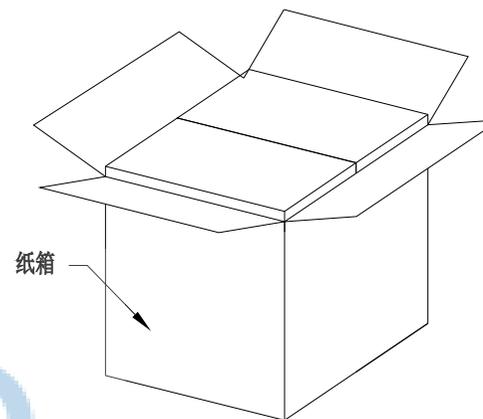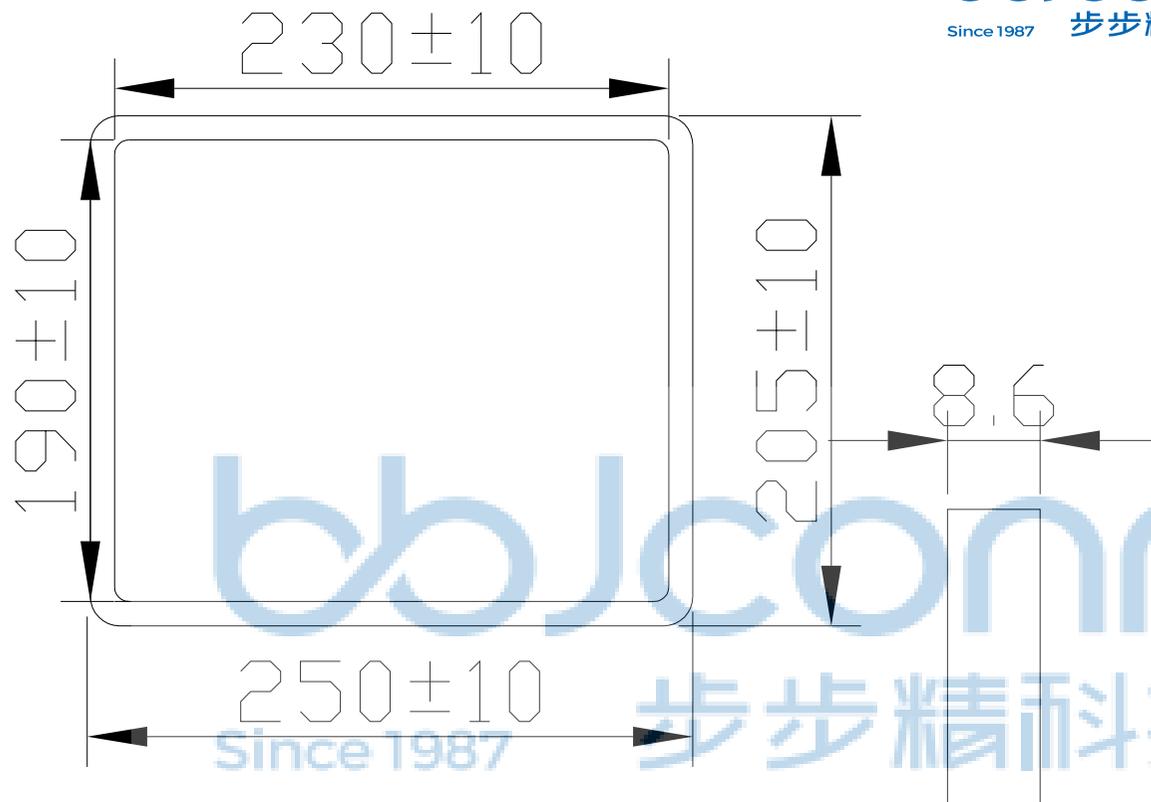

纸箱规格: 350\*210\*290

1. 包装要求:

- 1.1 每盒吸塑盒包装100pcs;
- 1.2 每20盘放一箱, 共计2000PCS;
- 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: $\pm 0.38$ .XX: $\pm 0.25$ .XXX: $\pm 0.13$ X': $\pm 3'$ .X': $\pm 2'$ .XX': $\pm 1'$		NAME: MINI 5P B型 四脚插 L=9.7 DIP 铜壳	
APPD. JM_Zheng	23/05'02	PJ. NO.: UB.07.12-12-9002 SIZE: A4   DRW NO.:	FINISH: SEE NOTES	MAT'L.: SEE NOTES	
CHKD. LYX	23/05'02		SCALE: N/A	REV.: A3	UNIT: mm
PDWG.NO: 0064-2	DR. SGF	23/05'02			