

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

原材料:Raw material:

1. 塑胶: Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
2. 端子: Contact: Copper Alloy C2680/C5191
3. 外壳: Shell: SPCC/Copper Alloy C2680

电镀: Electroplate:

1. 端子: Contact: Plated 1u" Min Gold in Mating Area;
100u" Tin On Solder Talls
2. 外壳: Shell:
60u" Nickel Plating



麦拉片

RECOMMENDED PCB LAYOUT



深圳市步步精科技有限公司

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.
PDWG.NO: 0064-2





.X: ±0.38 .X': ±3"
.XX: ±0.25 .X": ±2"
.XXX: ±0.13 .XX': ±1"

APPD. JM_Zheng 23/05'02
CHKD. LYX 23/05'02
DR. 23/05'02

NAME: MINI-5P 母座 L=9.20 全贴带柱 0.3壳 贴膜
平口 LCP黑色 铜壳 冷封编带330MM的盘子

PJ. NO.: UB.07.22-12-9004
SIZE: A4 DRW NO.:
FINISH: SEE NOTES MAT'L.: SEE NOTES
SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1



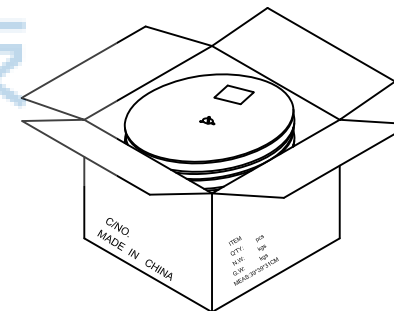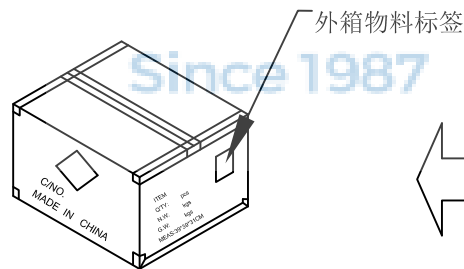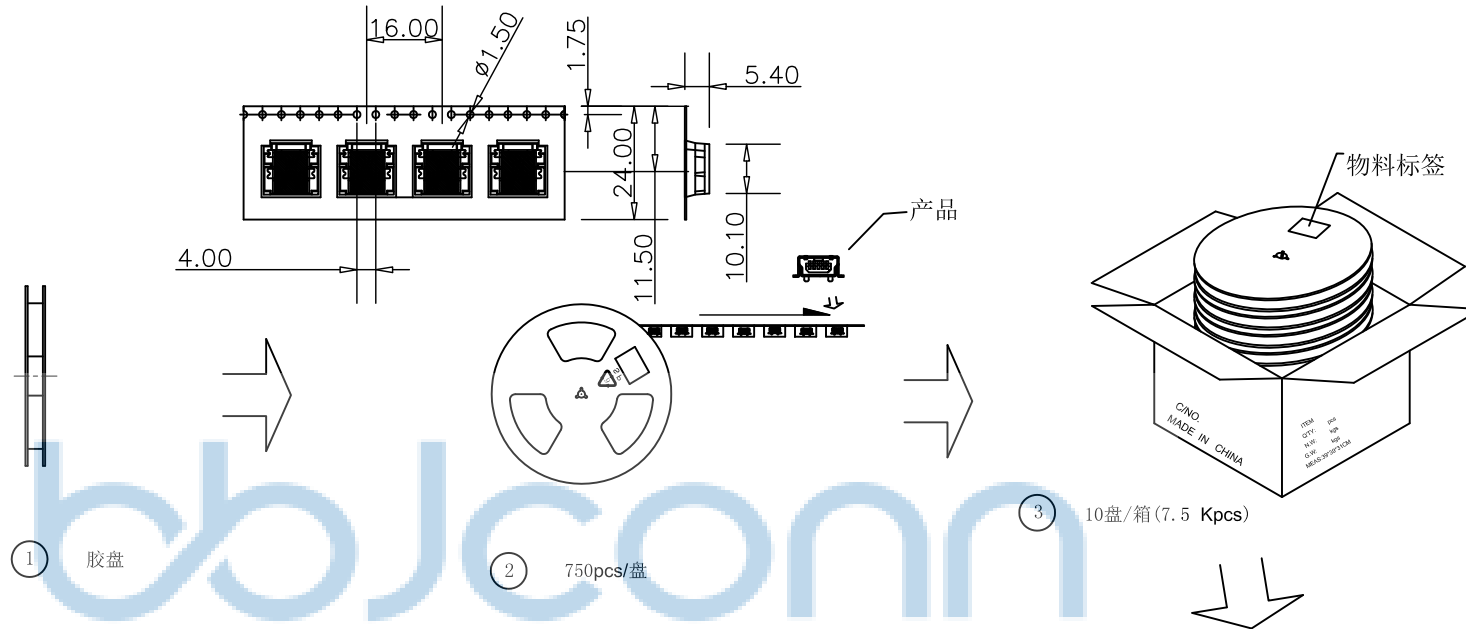

⑥ 依图示粘贴产品或ROHS标签.

⑤ 外箱用透明胶纸带封“工”字型.

④ 每箱装10盘, 若尾数箱在空间处加装填充物.

备注:

1. 胶盘规格: 330*24mm
2. 每盘装0.75K pcs;
3. 每箱装10盘 (7.5K pcs);
4. 外箱尺寸: 长*宽*高: 39*39*31cm;
5. 外箱用透明胶纸带封“工”字型;
6. 依外箱图示位置粘贴好产品或ROHS标签.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: MINI-5P 母座 L=9.20 全贴带柱 0.3壳 贴膜 平口 LCP黑色 铜壳 冷封带带330MM的盘子 PJ. NO.: UB.07.22-12-9004 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	
PDWG.NO: 0064-2	DR.	SGF	23/05/02	APPD.	JM_Zheng 23/05/02
	CHKD.	LYX	23/05/02		