


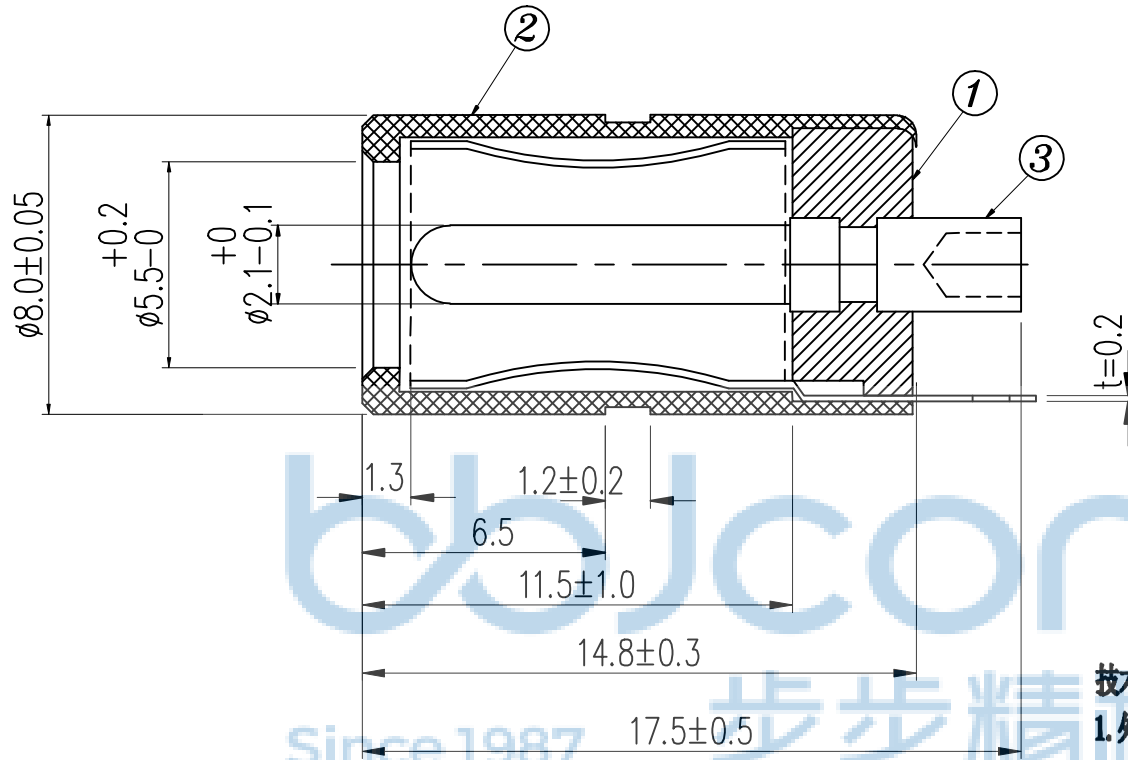

技术要求:

1. 外观:无披锋、生锈、电镀不良、碰伤现象。

2. 电气性能:

a: 绝缘阻抗:各导体间绝缘阻抗值在DC500V, 100MΩ 以上;

b: 耐电压:各导体间能承受AC500V, 1MIN而无绝缘坏和短路现象。

3. 机械性能:3次后取值插入力: 3N-30N, 拔出力:15N-30N之间(参考业界标准EIAJ RC5231标准)。



5				
4				△
3	BRASS	镀镍	2um Min	△
2	BRASS	镀镍	2um Min	△
1	PBT	黑色		△
NO.	材质	镀层	厚度	标记

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0371-1

深圳市步步精科技有限公司

NAME:
DC座 5521-175 带地线, 铜环保 5.5x2.1x17.5 镀镍母座



APPD. JM_Zheng 23/05'02 PJ. NO.: DC.05.G2-11-J001

CHKD. LYX 23/05'02 SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

PE袋规格:***X*** (以实际出货为准)

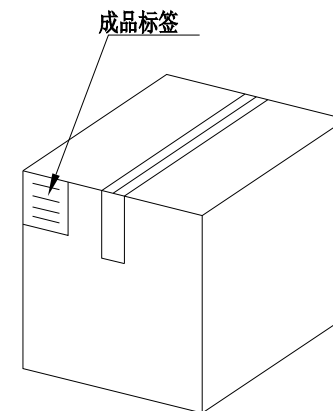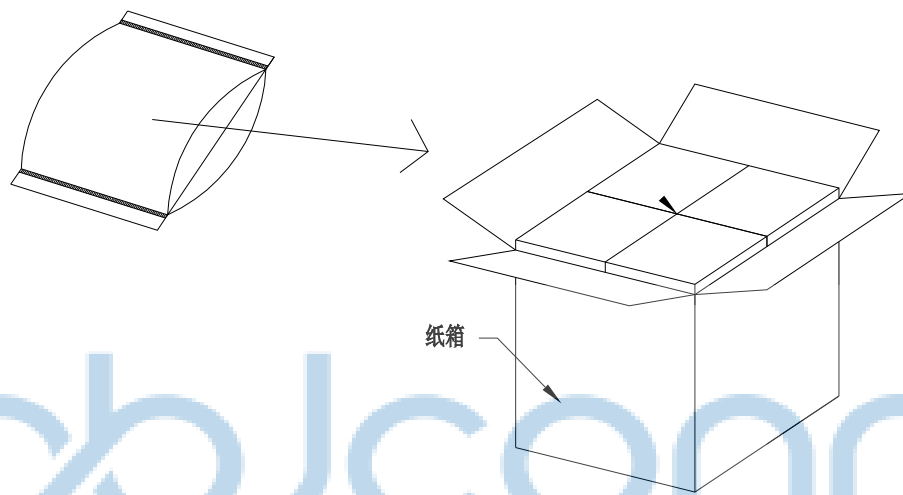

1. 包装要求: Since 1987

- 1.1 每PE袋包装1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.				深圳市步步精科技有限公司			
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X": ±3" .X": ±2" .XX": ±1"		NAME: DC座 5521-175 带地线, 铜环保 5.5x2.1x17.5 镀镍母座			
APPD.	JM_Zheng	23/05/02	PJ. NO.: DC.05.G2-11-J001		SIZE: A4 DRW NO.:		
CHKD.	LYX	23/05/02	FINISH: SEE NOTES		MAT'L.: SEE NOTES		
PDWG.NO:	0371-1	DR.	SGF	23/05/02	SCALE: N/A	REV.: A3	UNIT: mm PAGE: 1/1