
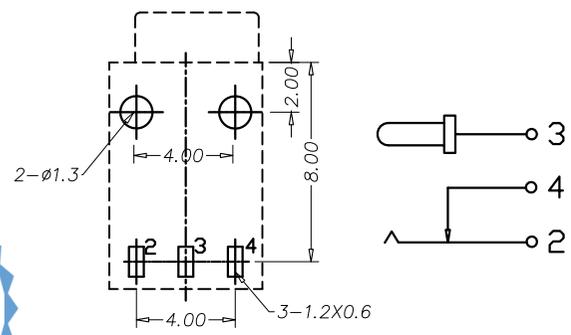
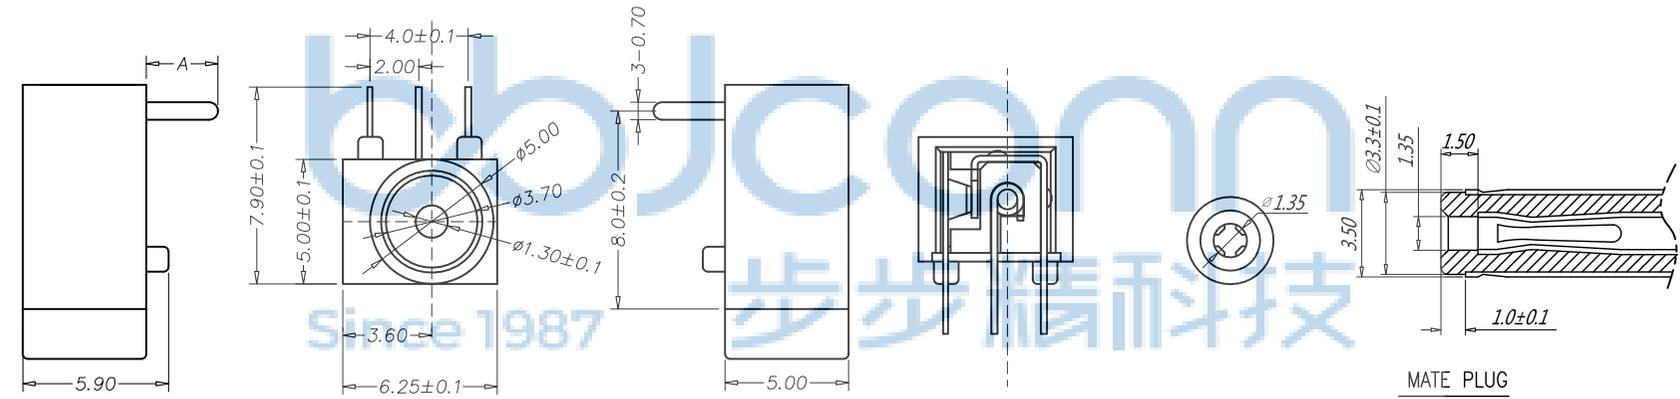



REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

主要技术性能	
额定电负荷	DC 30V\0.5A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐 压	AC500V(50Hz)/min
插 拔 力	3-20N
使用温度范围	-30-70℃
使用寿命	5000次

尺寸	A
类型	
	3.00±0.05

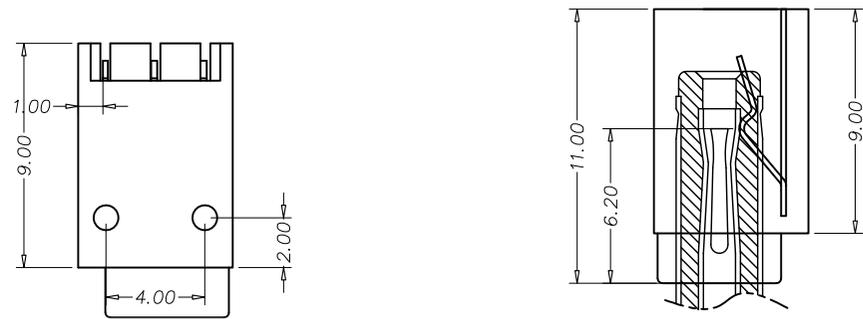

P. C. B LAYOUT TOP VIEW

PIN	∅1.0	∅1.3			
4	DC-003-04	弯钩	1	黄铜	0.25T 镍锡
3	DC-003-03	圆针	1	黄铜	0.25T 镍锡
2	DC-003-02	弹片	1	锰钢	0.20T 镍锡
1	DC-003-01	底座	1	PPA耐高温 (过260度回流焊)	黑色
序号	产品编号	产品名称	数量	材料	规格 电镀

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

深圳市步步精科技有限公司

NAME: DC插座 DC-003A 1.30针 三脚插 (DIP) 半铜 PPA耐高温 (过260度回流焊)

APPD. JM_Zheng 23/05'02

CHKD. LYX 23/05'02

DR. SGF 23/05'02

PJ. NO.: DC.02.41-11-H002

SIZE: A4 | DRW NO.:




FINISH: SEE NOTES | MAT'L.: SEE NOTES

SCALE: N/A | REV.: A3 | UNIT: mm | PAGE: 1/1

PDWG.NO: 0017-1

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

PE袋规格:***X*** (以实际出货为准)

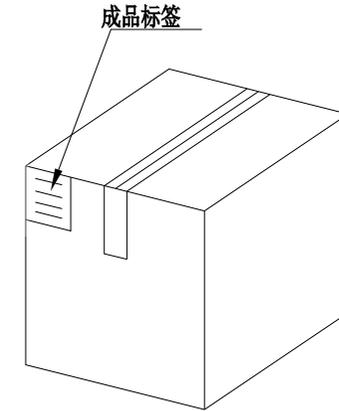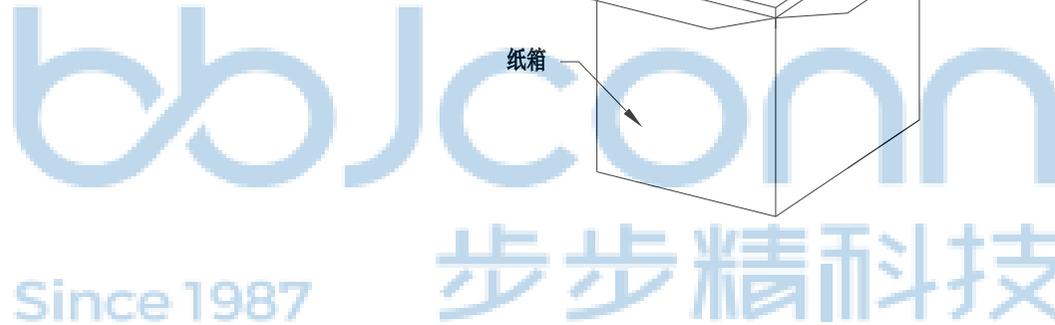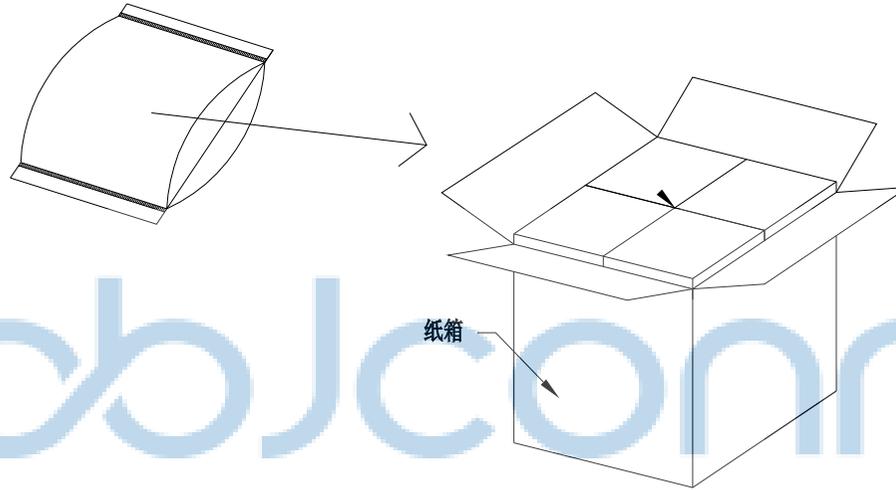

1. 包装要求:

- 1.1 每PE袋包装 1000PCS;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" X*: ±2" XX*: ±1"	
APPD. JM_Zheng 23/05'02		NAME: DC插座 DC-003A 1.30针 三脚插 (DIP) 半铜 PPA耐高温 (过260度回流焊)	
CHKD. LYX 23/05'02		PJ. NO.: DC.02.41-11-H002	
DR. SGF 23/05'02		SIZE: A4 DRW NO.:	
PDWG.NO: 0017-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	