

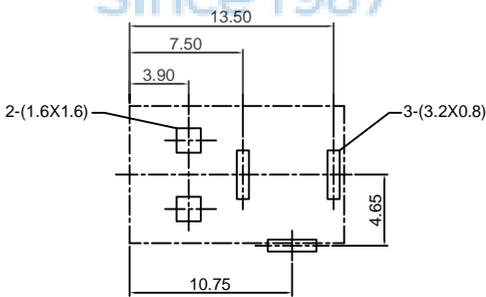




规格:

1. 额定值: DC30V 1.5A
2. 接触电阻: $\leq 30m\Omega$
3. 绝缘电阻: $\geq 100M\Omega$
4. 耐电压: 500VAC
5. 插拔力: 3N~30N
6. 使用寿命: 5000次
7. 使用温度: $-20^{\circ}C \sim +80^{\circ}C$

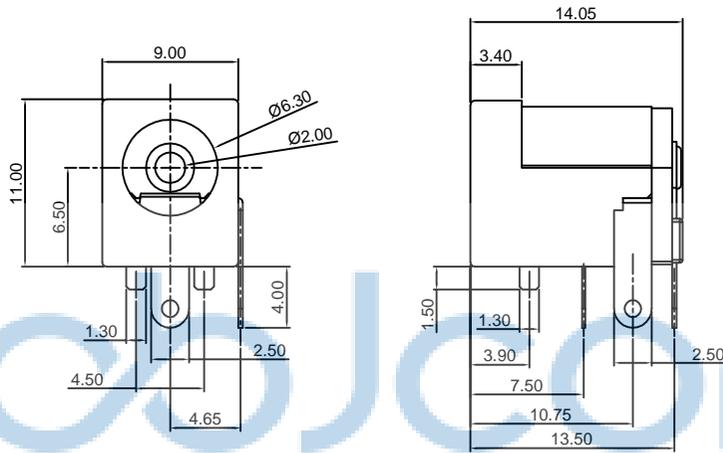

P.C.B 设计参考尺寸

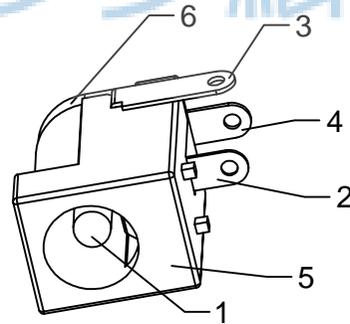

6	后盖	PBT	1	黑色
5	主体	PBT	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	锰钢 T=0.2mm	1	镀锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0050-2

深圳市步步精科技有限公司

NAME: DC005-2.0半铜-双柱

PJ. NO.: DC.02.71-11-2002



SIZE: A4 DRW NO.:

FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

APPD.	JM_Zheng	23/05'02
CHKD.	LYX	23/05'02
DR.	SGF	23/05'02

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

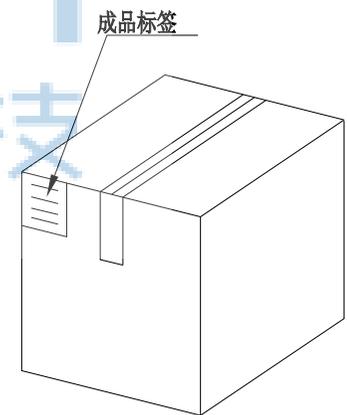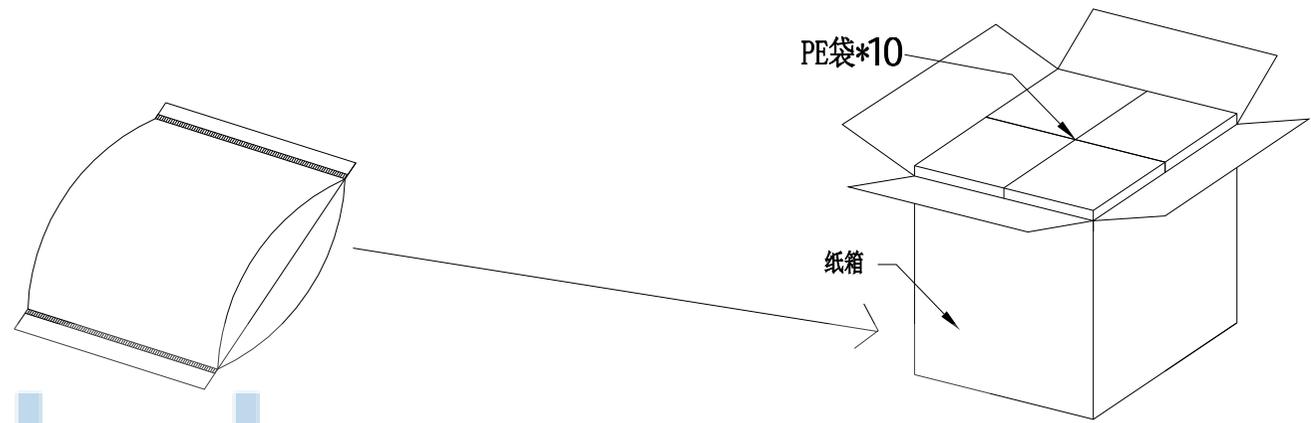

1. 包装要求:
- 1.1 每PE袋包装500pcs;
 - 1.2 每10个PE袋放一个纸箱, 共计5000 PCS
 - 1.3 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3" .XX: ±0.25 .X'': ±2" .XXX: ±0.13 .XX': ±1"		NAME: DC005-2.0半铜-双柱	
APPD.	JM_Zheng	23/05'02	PJ. NO.: DC.02.71-11-2002 SIZE: A4 DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES		
PDWG.NO:	0050-2	DR.	SGF	23/05'02	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1