



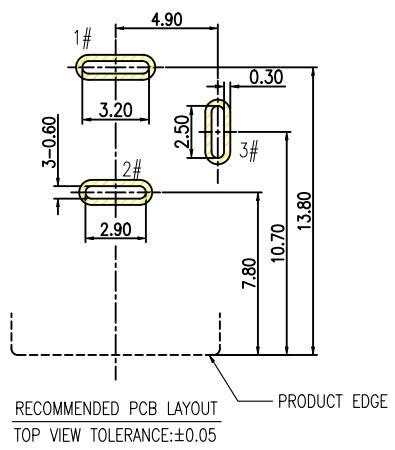


SPECIFICATION:

1. RATING: DC 60V 5A
2. CONTACT RESISTANCE: 30m Ω MAX.
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 6N MIN.
7. DURABILITY: 5,000 CYCLES

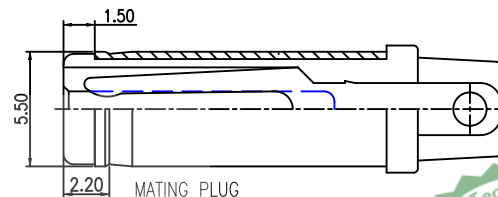

MATING PLUG

SCHEMATIC



F	PLATE	BRASS	Sn 60u" MIN./Ni 50u" MIN.	1
E	SHUNT	BRASS	Sn 60u" MIN./Ni 50u" MIN.	1
D	SPRING	COPPER ALLOY	Au 1u" ON THE CONTACT AREA Sn 60u" MIN. ON THE SOLDER TAIL Ni 50u" MIN. UNDER PLATED OVERALL	1
C	CENTER PIN	BRASS	Au 1u"/Ni 50u" MIN.	1
B	COVER	LCP	BLACK	1
A	HOUSING	LCP	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.







深圳市步步精科技有限公司



.X: ± 0.38 .X': ± 3
.XX: ± 0.25 .X'': ± 2
.XXX: ± 0.13 .X'': ± 1

NAME:
DC座 DC-2.0针 全铜 卧式 三脚插 (DC550200-1095-20000H)

APPD.	JM_Zheng 23/05/02	PJ. NO.:	DC.02.62-12-G002
CHKD.	LYX 23/05/02	SIZE:	A4 DRW NO.:
PDWG. NO.:	0386-2	FINISH:	SEE NOTES
DR.	SGF 23/05/02	MAT'L:	SEE NOTES
		SCALE:	N/A
		REV.:	A3
		UNIT:	mm
		PAGE:	1/1

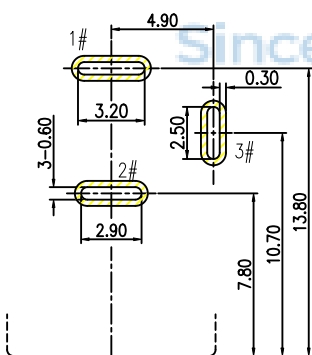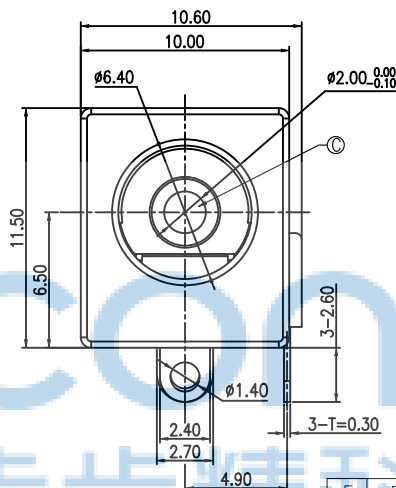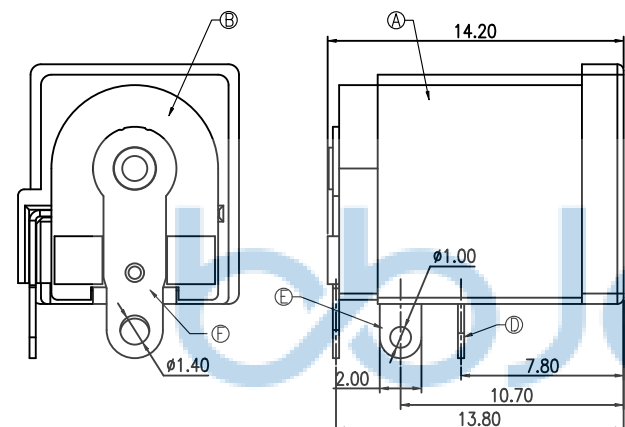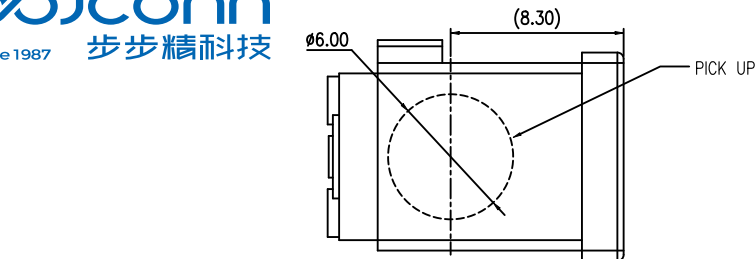

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ± 0.05



PRODUCT EDGE

拉出方向

包装盘标签

总共10层

外箱,1PCS

透明胶带

PE袋:

包装盘:外径 $\phi 380$;内径 $\phi 100$

覆盖带 300mm 最少

拉出方向

备注:

- 材料规格:
 - 载带:透明
 - 包装盘:蓝色
 - 纸箱: L=335,W=335,H=380
- 包装数量: 200PCS/卷, 10卷(2000PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟。



标签贴在
载带圆孔一侧

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0386-2	DR. SGF	.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13 X': $\pm 3'$ X'': $\pm 2'$.XX': $\pm 1'$	NAME: 座座 DC-2.0针 全铜 卧式 三脚插 (DC550200-1095-20000H) PJ. NO.: DC.02.62-12-G002 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1