





REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:




1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30m? MAX(INITIAL).
50m? MAX(FINAL).
3. INSULATION RESISTANCE: 100 M? MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

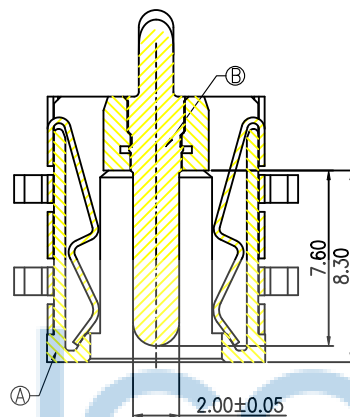

SECTION A-A

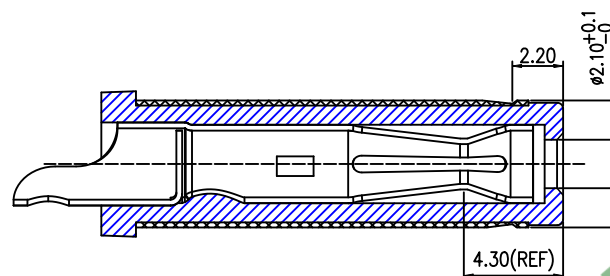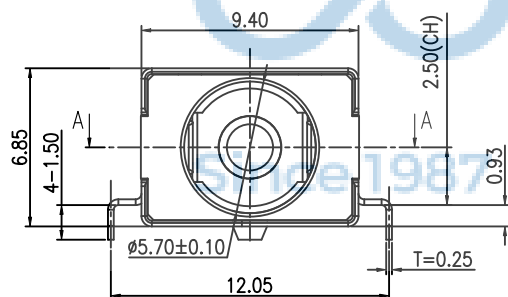

MATING PLUG
DP550200-0129-60000H

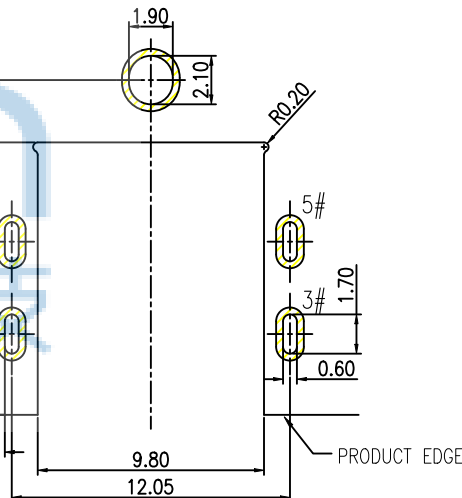

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05


C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co., Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

PDWG.NO: 0386-2
DR. SGF 23/05/02

深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X*: ±3* X*: ±2* X*: ±1*
APPD. JM_Zheng 23/05/02 CHKD. LYX 23/05/02	NAME: DC座 DC-2.0针 全铜 卧式 四脚插 (DC550200-1155-20000H)
P.J. NO.: DC.02.62-12-G004 SIZE: A4 DRW NO.:	FINISH: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1

拉出方向

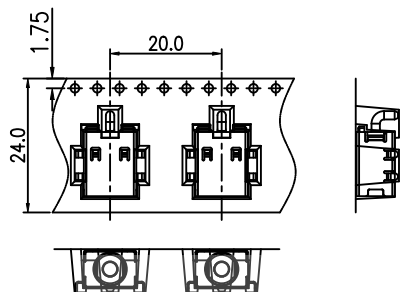

包装盘标签

总共10层

PE袋:



外箱, 1PCS

透明胶带

拉出方向

包装盘: 外径 $\phi 330$; 内径 $\phi 100$

拉出方向



备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:
 - 400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟 .



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0386-2		DR. SGF		23/05/02	
APPD. JM_Zheng		23/05/02		CHKD. LYX		23/05/02	
FINISH: SEE NOTES		MAT'L: SEE NOTES		SCALE: N/A		REV.: A3	
UNIT: mm		PAGE: 1/1					



深圳市步步精科技有限公司

NAME: DC座 DC-2.0针 全铜 卧式 四脚插 (DC550200-1155-20000H)

PJ. NO.: DC.02.62-12-G004

SIZE: A4 DRW NO.: