

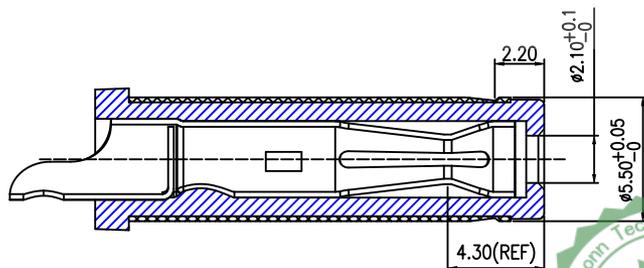
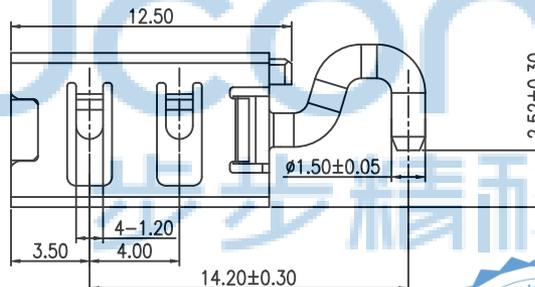
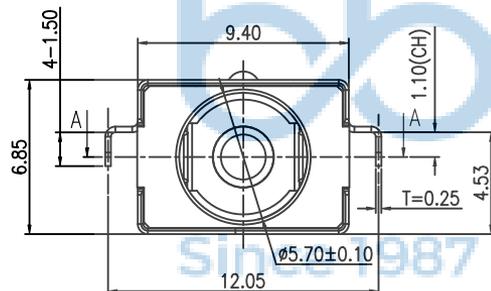
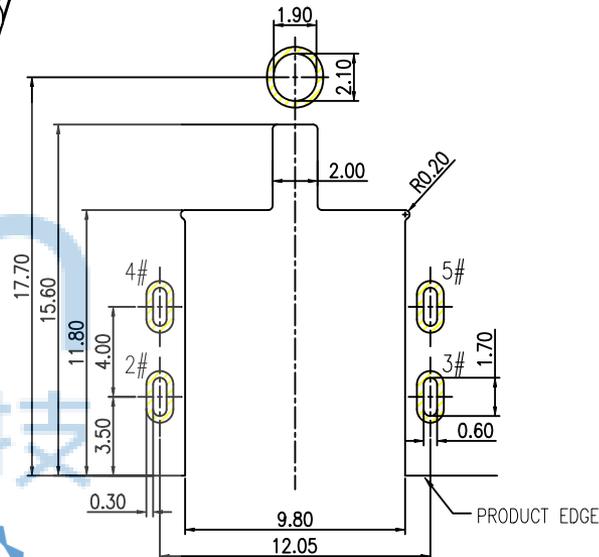

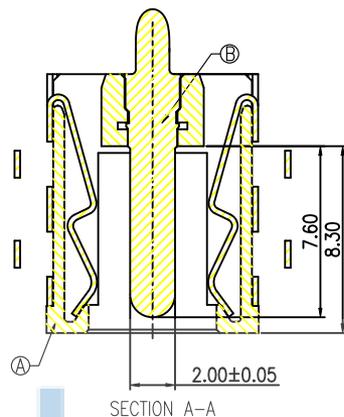


REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:

1. RATING: DC 30V 15A
2. CONTACT RESISTANCE:
30m? MAX(INITIAL),
50m? MAX(FINAL).
3. INSULATION RESISTANCE: 100 M? MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 30N MAX.
6. EXTRACTION FORCE: 3N MIN.
7. DURABILITY: 5,000 CYCLES

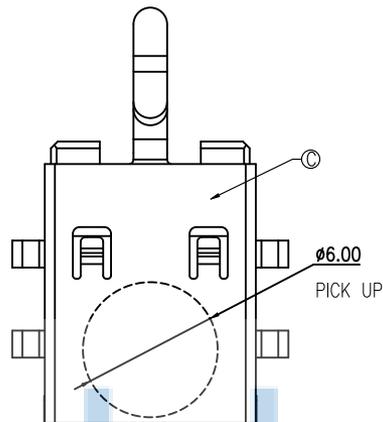


NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
C	SHELL	C5210	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH /Ni 40u" MIN.	1
A	HOUSING	PA10T	BLACK	1


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部部长	
PDWG.No: 0386-2	DR. SGF	.X: ± 0.38 .XX: ± 0.25 .XXX: ± 0.13	X': $\pm 3'$ X'': $\pm 2'$ X'X': $\pm 1'$
APPD. JM_Zheng 23/05'02		NAME: DC座 DC-2.0针 全铜 卧式 四脚插 (DC550200-1160-20000H)	
CHKD. LYX 23/05'02		P.J. NO.: DC.02.62-12-G009	
FINISH: SEE NOTES		MAT'L: SEE NOTES	
SCALE: N/A		REV.: A3	
UNIT: mm		PAGE: 1/1	

REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

拉出方向


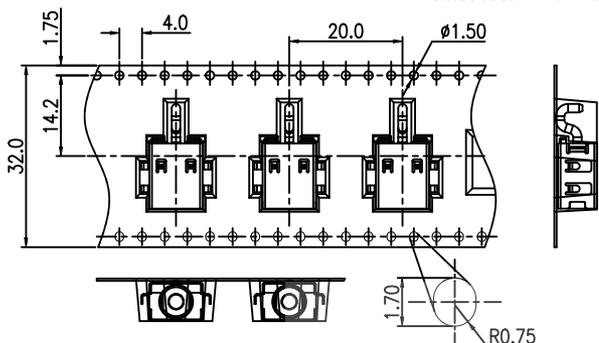


拉出方向

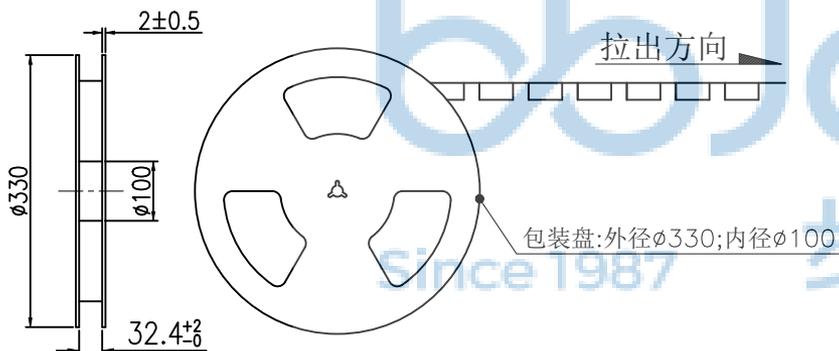

包装盘: 外径 ϕ 330; 内径 ϕ 100


拉出方向




总共10层




PE袋:



外箱, 1PCS



透明胶带



备注:

- 材料规格:
 - 载带: T=0.50mm
 - 包装盘: 蓝色
 - 纸箱: L=335, W=335, H=380
- 包装数量:

400PCS/卷, 10卷(4000PCS)/箱
- 上盖带拨离力: 0.1N~0.7N(10~70gf);
 拨离角度: 165°~180°;
 拨离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
APPD.	JM_Zheng 23/05/02	NAME:	DC座 DC-2.0针 全铜 卧式 四脚插 (DC550200-1160-20000H)
CHKD.	LYX 23/05/02	PJ. NO.:	DC.02.62-12-G009
DR.	SGF 23/05/02	SIZE:	A4
PDWG.NO:	0386-2	FINISH:	SEE NOTES
		MAT'L.:	SEE NOTES
		SCALE:	N/A
		REV.:	A3
		UNIT:	mm
		PAGE:	1/1