
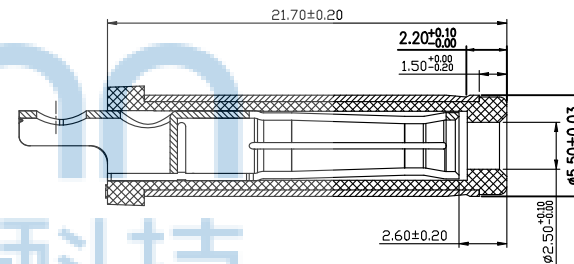

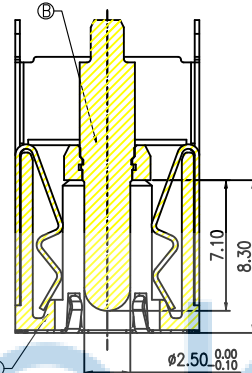


SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m? MAX.(INITIAL)
50m? MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M? MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

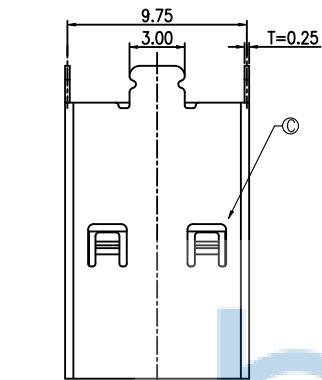




MATING PLUG

SCHEMATIC

- 1#(+)
—△— 2#/3#4#(-)

E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u" MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY





THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 NAME: DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC550250-1078-200000H)	
APPD.	JM_Zheng 23/05'02	PJ. NO.: DC.02.72-12-G006 SIZE: A4 DRW NO.:	
CHKD.	LYX 23/05'02	FINISH: SEE NOTES MAT'L: SEE NOTES	
PDWG.NO:	0386-2	DR.	SGF 23/05'02
		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1

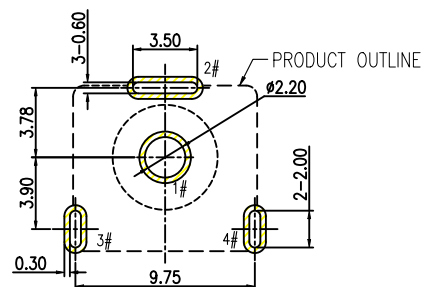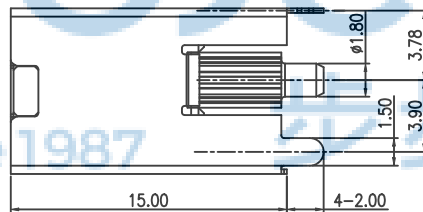

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE:±0.05



拉出方向

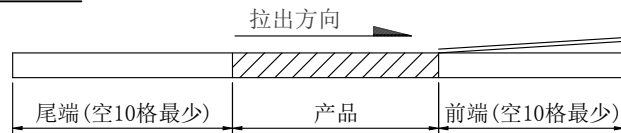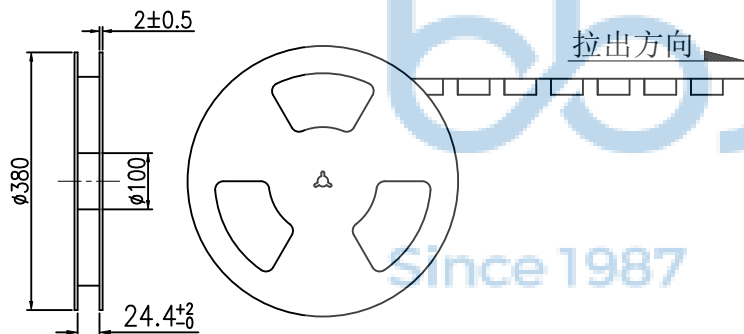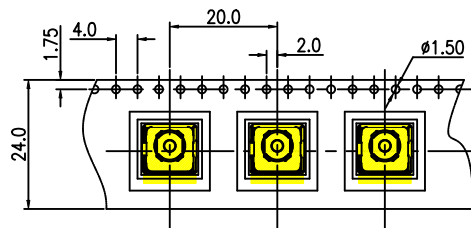

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

备注:

- 材料规格:
 - 载带: T=0.50mm
 - 包装盘: 蓝色
 - 纸箱: L=385, W=385, H=300
- 包装数量:
 - 250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟。



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 工程部部长	
PDWG. NO:	0386-2	.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	.X': ±3° .X'': ±2° .X.X': ±1°
APPD.	JM_Zheng 23/05'02	NAME: DC座 DC-2.5针 全铜 直立180° 三脚插 (DC50250-1078-20000H)	
CHKD.	LYX 23/05'02	P.J. NO.: DC.02.72-12-G006	
DR.	SGF 23/05'02	SIZE: A4 DRW NO.:	
		FINISH: SEE NOTES MAT'L: SEE NOTES	
		SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	