
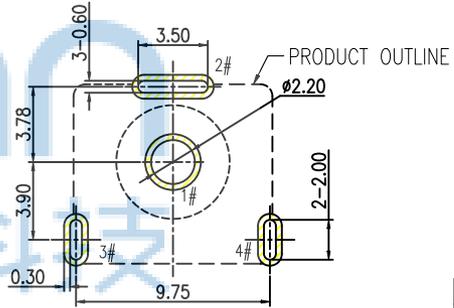
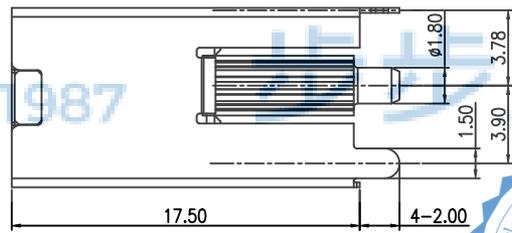
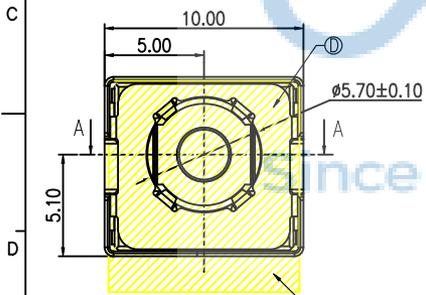
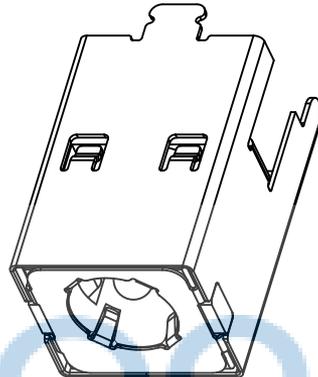
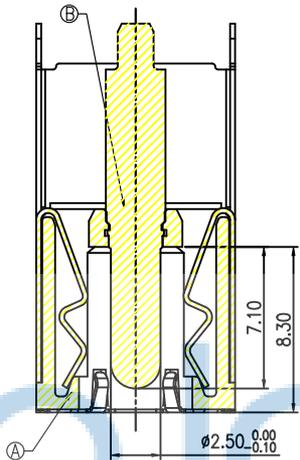




REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

SPECIFICATION:

1. RATING: DC 20V 20A
2. CONTACT RESISTANCE:
30m² MAX.(INITIAL)
50m² MAX.(FINAL)
3. INSULATION RESISTANCE: 100 M² MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

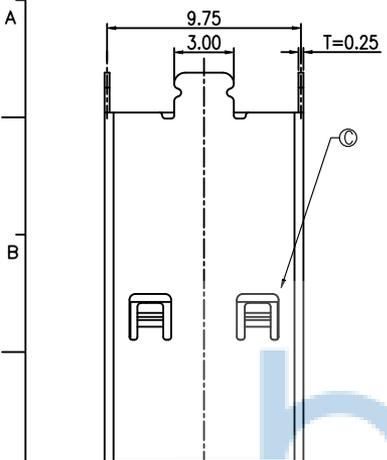

RECOMMENDED PCB LAYOUT
TOP VIEW TOLERANCE: ±0.05

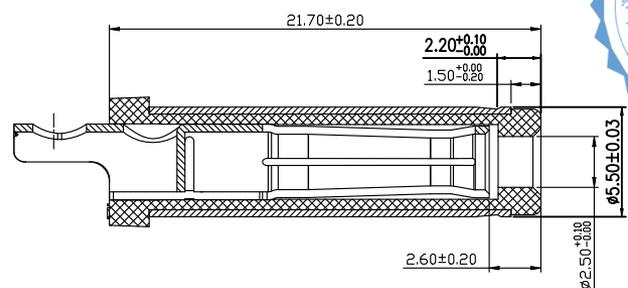

MATING PLUG

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
E	MYLAR			1
D	GROUND	SUS 304		1
C	SHELL	COPPER ALLOY	Ni 40u"MIN.	1
B	CENTER PIN	BRASS	GOLD FLASH/Ni 40u" MIN.	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. CORPORATION AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0386-2

DR. SGF 23/05/02

CHKD. LYX 23/05/02

APPD. JM_Zheng 23/05/02

NAME: DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC550250-1080-20000H)

PJ. NO.: DC.02.72-12-G008

SIZE: A4 DRW NO.:


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1


深圳市步步精科技有限公司

REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

拉出方向

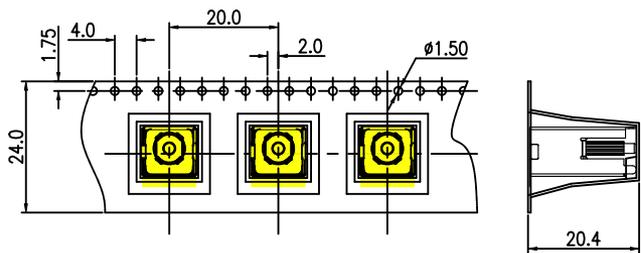

拉出方向

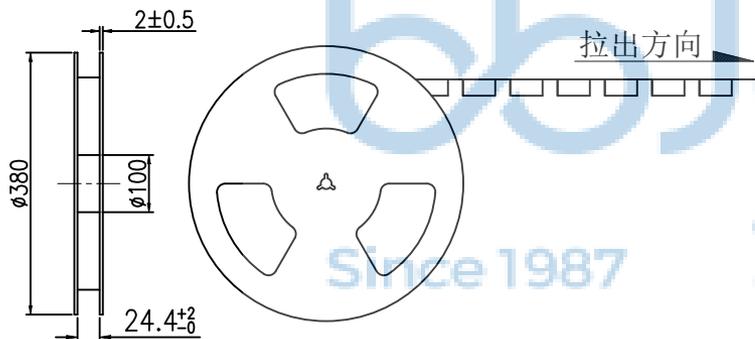

总共10层

PE袋:

外箱, 1PCS

透明胶带

INSIDE DIM.

INSIDE DIM.

INSIDE DIM.

备注:

- 材料规格:
 - 1.1 载带:T=0.50mm
 - 1.2 包装盘:蓝色
 - 1.3 纸箱: L=385,W=385,H=300
- 包装数量:
250PCS/卷, 10卷(2500PCS)/箱
- 上盖带拔离力: 0.1N~0.7N(10~70gf);
拔离角度: 165°~180°;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		PDWG.NO: 0386-2		DR. SGF 23/05/02	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3" X'': ±2" X'X': ±1"		NAME: DC座 DC-2.5针 全铜 直立式180° 三脚插 (DC550250-1080-20000H)	
APPD. JM_Zheng 23/05/02		CHKD. LYX 23/05/02		P.J. NO.: DC.02.72-12-G008	
FINISH: SEE NOTES		MAT'L: SEE NOTES		SCALE: N/A	
REV.: A3		UNIT: mm		PAGE: 1/1	

深圳市步步精科技有限公司