


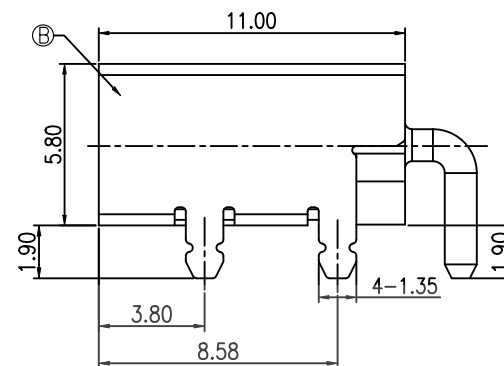

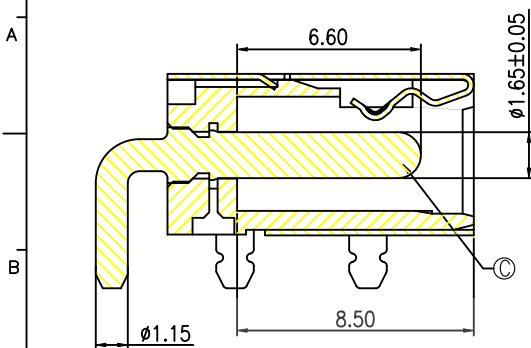


SPECIFICATION:

1. RATING: DC 20V 7A
2. CONTACT RESISTANCE: 30m Ω MAX.
3. INSULATION RESISTANCE: 100 M Ω MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 3N~30N
6. EXTRACTION FORCE: 3N~30N
7. DURABILITY: 5,000 CYCLES

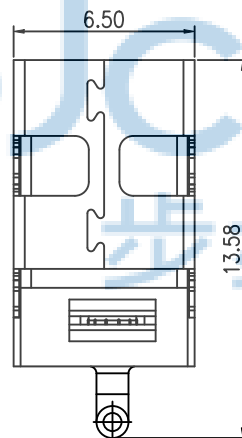


SECTION A-A

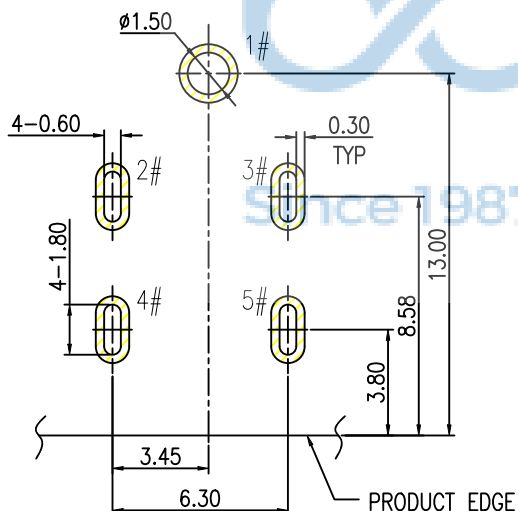

MATING PLUG

SCHEMATIC





C	CENTER PIN	BRASS	GOLD FLASH/Ni 40u"	1
B	SHELL	COPPER ALLOY	Ni 40u"	1
A	HOUSING	HIGH TEMP.THERMOPLASTIC	BLACK	1
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

RECOMMENDED PCB LAYOUT(T=1.00)
TOP VIEW TOLERANCE: ± 0.05

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ± 0.38 .X': $\pm 3^{\circ}$.XX: ± 0.25 .X': $\pm 2^{\circ}$.XXX: ± 0.13 .X': $\pm 1^{\circ}$		NAME: DC座 DC-1.65针 全铜 板上型 四脚插 (DC400170-1094-20000H)
APPD.	JM_Zheng	23/05'02	PJ. NO.:	DC.03.52-12-G011
CHKD.	LYX	23/05'02	SIZE: A4 DRW NO.:	
PDWG.NO:	0386-2	DR.	SGF	23/05'02
		FINISH:	SEE NOTES	MAT'L.: SEE NOTES
		SCALE:	N/A	REV.: A3 UNIT: mm PAGE: 1/1

拉出方向





包装盘标签

总共10层

PE袋:

外箱,1PCS

透明胶带

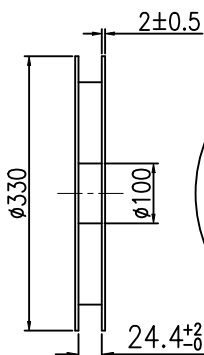


拉出方向

包装盘:外径 $\phi 330$;内径 $\phi 100$

覆盖带 350mm 最少.

拉出方向



备注:

- 材料规格:
 - 载带: $T=0.50\text{mm}$, 黑色
 - 包装盘: 蓝色
 - 纸箱: $L=335, W=335, H=300$
- 包装数量:

600PCS/卷, 10卷(6000PCS)/箱
- 上盖带拔离力: $0.1\text{N}\sim 0.7\text{N}$ ($10\sim 70\text{gf}$);
拔离角度: $165^\circ\sim 180^\circ$;
拔离速度: 300mm/分钟.



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ± 0.38	.X': $\pm 3'$	NAME: DC座 DC-1.65针 全铜 板上型 四脚插 (DC400170-1094-20000H)	
.XX: ± 0.25	.X': $\pm 2'$	P.J. NO.: DC.03.52-12-G011	
.XXX: ± 0.13	.XX': $\pm 1'$	SIZE: A4 DRW NO.:	
APPD. JM_Zheng 23/05'02	CHKD. LYX 23/05'02	FINISH: SEE NOTES MAT'L: SEE NOTES	
PDWG.NO: 0386-2	DR. SGF 23/05'02	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	