

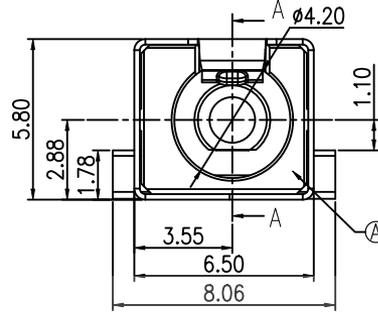



REV.	ECN NO	CONTENT	DATE	ENGINEER
AO			2023 20/04	

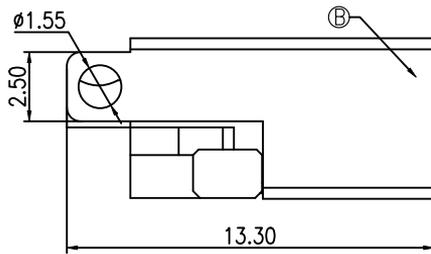




3D VIEW

SPECIFICATION:

1. RATING: DC 20V 5A
2. CONTACT RESISTANCE: 30mΩ MAX.
3. INSULATION RESISTANCE: 100 MΩ MIN.
4. WITHSTAND VOLTAGE: 500 VAC
5. INSERTION FORCE: 2.0Kgf MAX.(INITIAL)
2.0Kgf MAX.(FINAL)
6. EXTRACTION FORCE: 1Kgf~3.0Kgf(INITIAL)
0.7Kgf~3.0Kgf(FINAL)
7. DURABILITY: 10,000 CYCLES

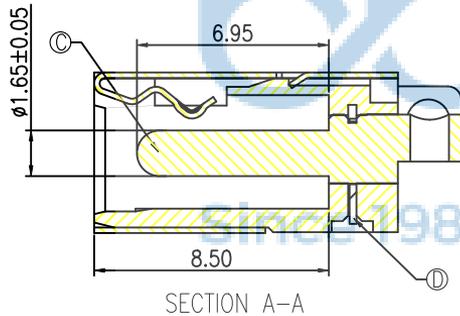

SECTION A-A

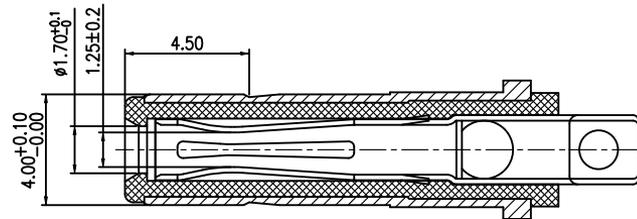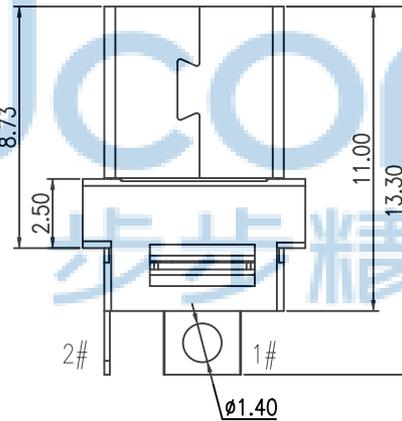


MATING PLUG




NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
D	STOPPER	SUS 304		1
C	CENTER PIN	C3602	Sn100u"/Ni 50u"	1
B	SHELL	C5210	Ni 50u"	1
A	HOUSING	PA10T	BLACK	1

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 APPD. JM_Zheng 23/05/02 CHKD. LYX 23/05/02 PDWG.NO: 0386-2 DR. SGF 23/05/02		NAME: DC座 DC-1.65针 全铜 焊线式 (DC400170-0119-60000H) PJ. NO.: DC.05.52-11-G001 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	
---	--	---	--	---	--

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	




DC JACK

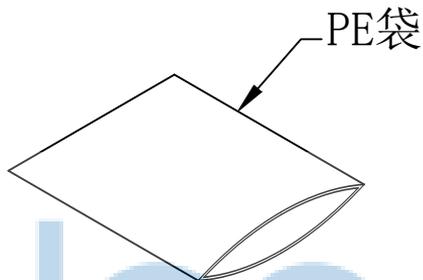

PE袋

1000PCS/袋

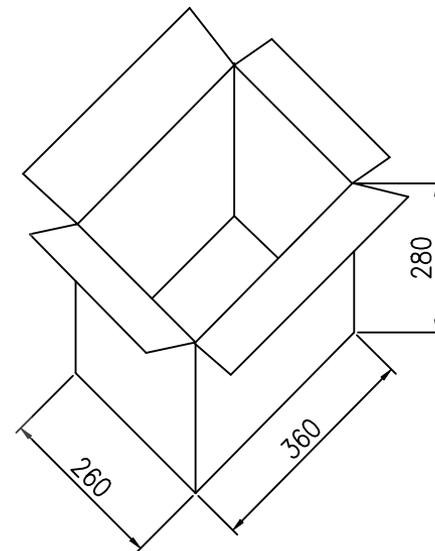

10000PCS/10袋/箱



备注:

1. 材料规格:
纸箱: L=360,W=260,H=280
2. 包装数量:
1000PCS/袋, 10000PCS/箱



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司 .X: ±0.38 .X': ±3' .XX: ±0.25 .X'': ±2' .XXX: ±0.13 .X''': ±1'		NAME: DC座 DC-1.65针 全铜 焊线式 (DC400170-0119-60000H)	
APPD.	JM_Zheng	23/05'02	PJ. NO.: DC.05.52-11-G001 SIZE: A4 DRW NO.:		
CHKD.	LYX	23/05'02	FINISH: SEE NOTES MAT'L.: SEE NOTES		
PDWG.NO:	0386-2	DR.	SGF	23/05'02	SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1