






REV.	ECN NO.	CONTENT	DATE	ENGINEER
AO			2023 20/04	

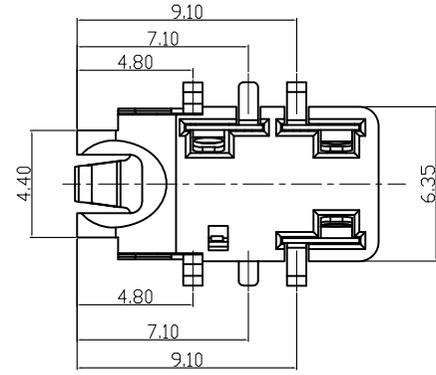

1.MATERIAL:  
NOTES: 1.1 HOUSING: UL94V-0,COLOR: BLACK  
1.2 CONTACT: SUS ALLOY


2.PLATING:  
2.1 CONTACTS PLATING: SEE ORDERING INFORMATION

3.RATING  
3.1 OPERATING VOLTAGE: 30VAC/DC.  
3.2 CURRENT RATING: 0.5A AC/DC.  
3.3 OPERATING TEMPERATURE: -25°C~+85°C

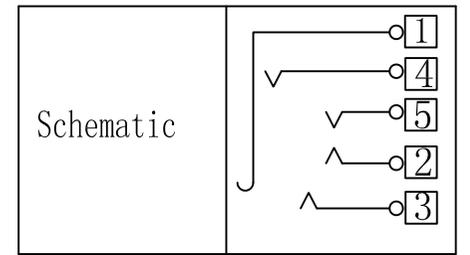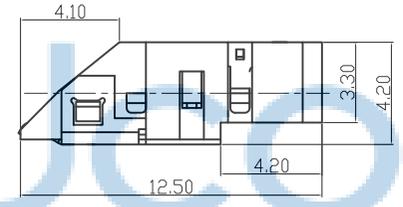



Since 1987

步步精科技

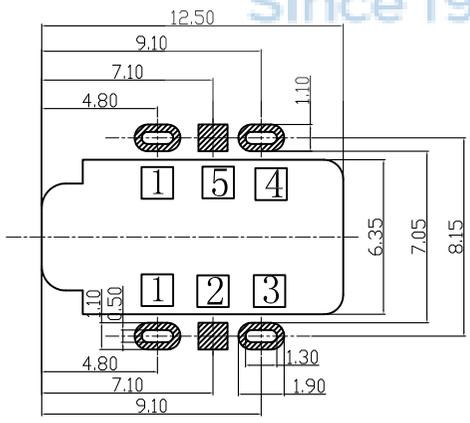


RECOMMEND PCB LAYOUT  
TOLERANCE ±0.05

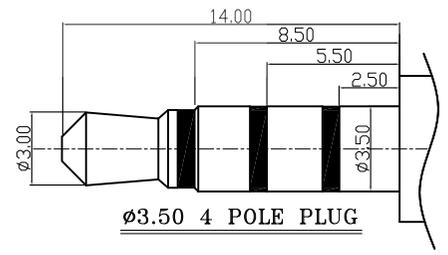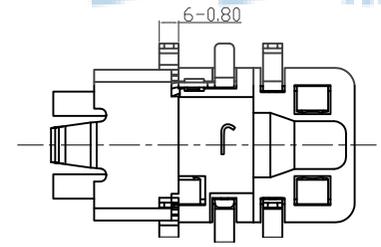

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		<b>深圳市步步精科技有限公司</b> .X: ±0.38 .XX: ±0.25 .XXX: ±0.13 X': ±3' X'': ±2' XX': ±1'		NAME: 3.5耳机座 斜口 沉板1.5 四脚插 两脚贴 PJ. NO.: PJ.03.22-01-K001 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A3 UNIT: mm PAGE: 1/1	
PDWG.NO: 0371-1	DR. SGF	23/05'02			

REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

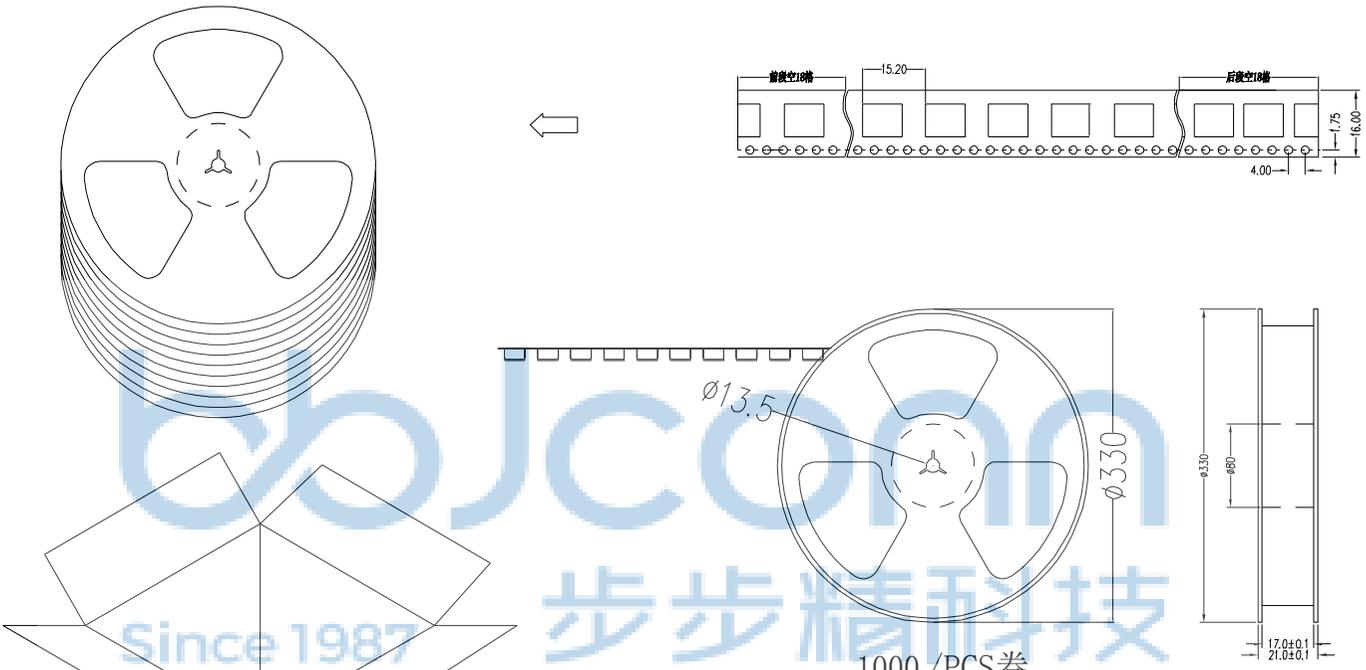

备注:

1. 包装数量: 1000 /PCS/卷, 10卷/箱或15卷/箱。
2. 包装袋长度: 每卷前后各空10-20个空格, 中间包装。
3. 材质:  
载体: 聚丙烯 (PS), 阻抗 $10^{6-9} \Omega$   
上带: 聚乙烯 (PET), 阻抗 $10^{6-11} \Omega$   
卷盘: 聚苯乙烯。

纸箱规格: 345\*345\*23MM  
纸箱规格: 345\*345\*35MM



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' X''': ±1'	
APPD.	JM_Zheng	23/05'02	NAME: 3.5耳机座 斜口 沉板1.5 四脚插 两脚贴
CHKD.	LYX	23/05'02	PJ. NO.: PJ.03.22-01-K001
DR.	SGF	23/05'02	SIZE: A4 DRW NO.:
PDWG.NO: 0371-1			FINISH: SEE NOTES MAT'L.: SEE NOTES
		SCALE: N/A	REV.: A3 UNIT: mm PAGE: 1/1