
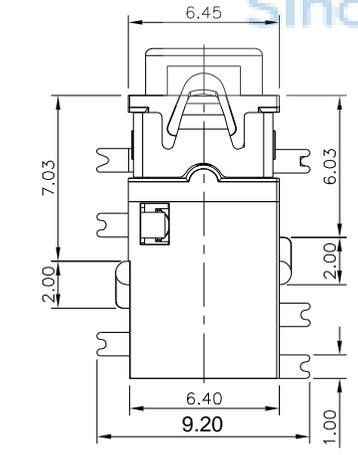
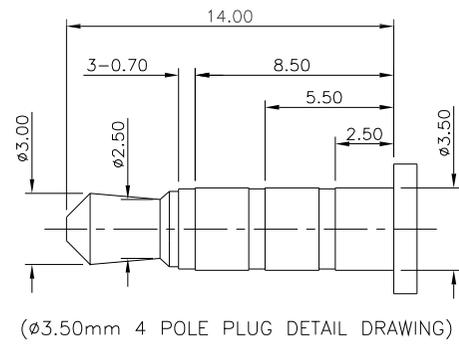

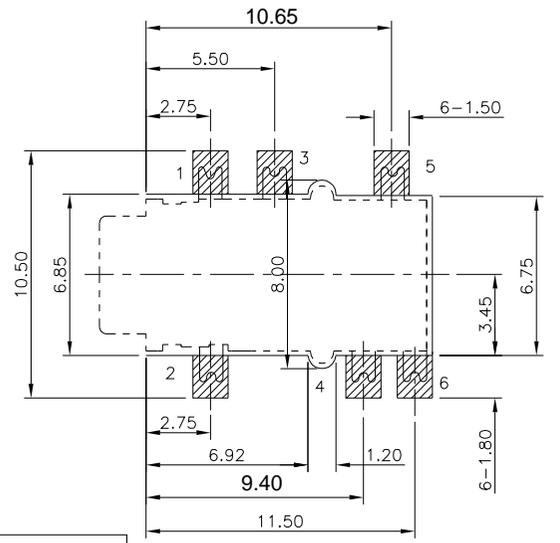
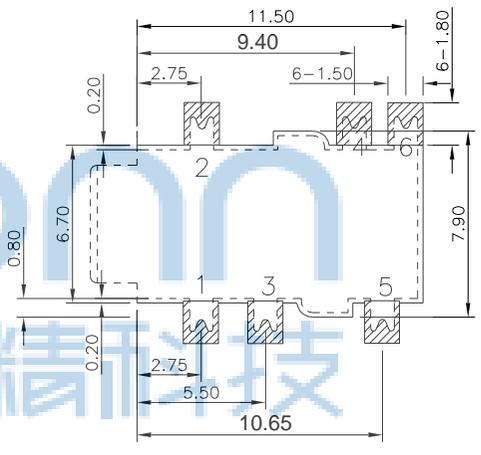
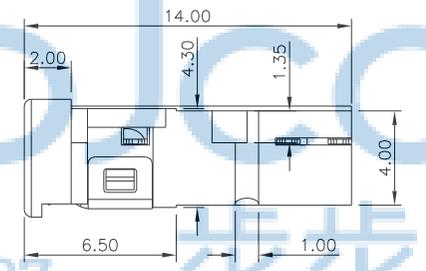
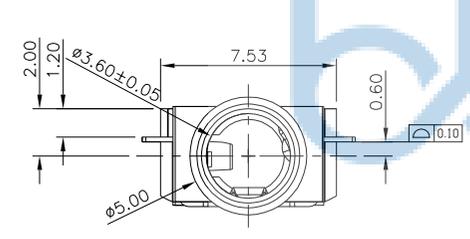
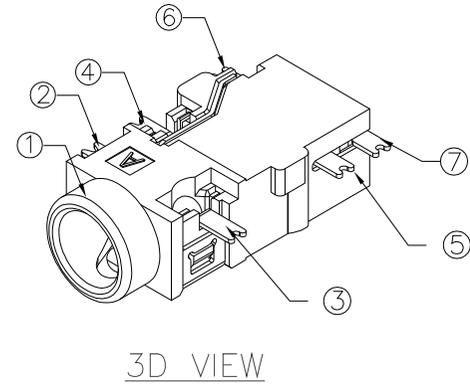


REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	

- NOTES:
- REQUEST OF THE SPECIFICATION:
 - CONTACT CURRENT RATING: 1A.;
 - CONTACT RESISTANCE: 100 mΩ MAX.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.8N (3.00Kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.98N(0.30Kgf) MIN.;

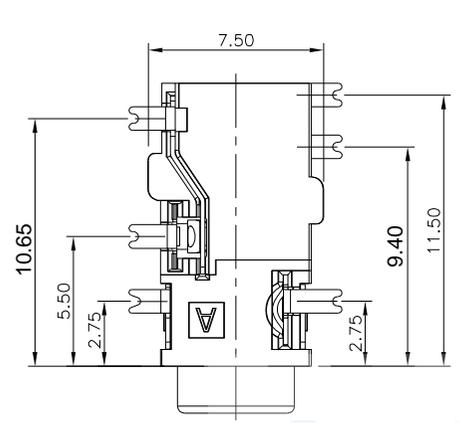

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
7	TERMINAL 6#	1	PHOSPHOR BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA	T=0.20
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA	T=0.20
5	TERMINAL 4#	1	SUS304; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	T=0.20
4	TERMINAL 3#	1	SUS304; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
3	TERMINAL 2#	1	PHOSPHOR BRONZE; NICKEL(40u"MIN.) UNDER PLATING OVERALL,GOLD FLASH ON SOLDER AREA ;GOLD FLASH ON CONTACT AREA	T=0.20
2	TERMINAL 1#	1	SUS304; THE BOTTOM OF THE NICKEL(40u"MIN.); THE WHOLE GOLD FLASH PLATING.	T=0.20
1	HOUSING	1	PPA COLOR BLACK	

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

PDWG.NO: 0076-1 DR. SGF 23/05'02

深圳市步步精科技有限公司

NAME: 3.5耳机座 有头 沉板1.4 六脚贴片 全金 正编带 (PJ35A028-F06G1BR-A)


PJ. NO.: PJ.01.21-01-3005

SIZE: A4 DRW NO.:


FINISH: SEE NOTES MAT'L.: SEE NOTES

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1




1载带=1000PCS
1外箱=1000PCSX10盘载带=10000PCS

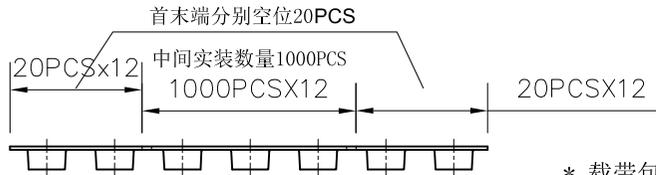

* 载带包装时请依此引出方向为标准

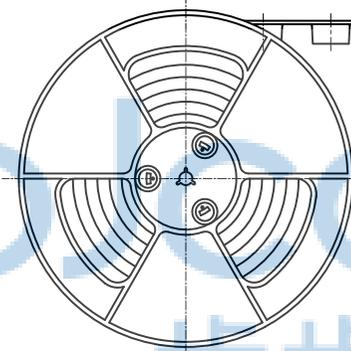


卷盘包装示意

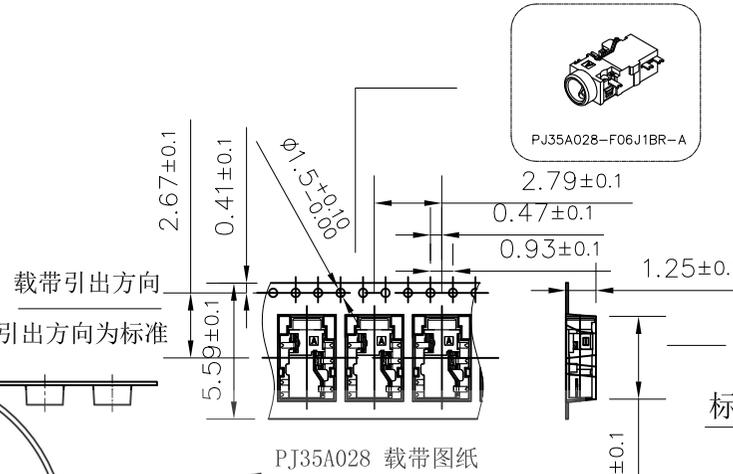

标签一

干燥剂

薄膜袋 (HDPE)

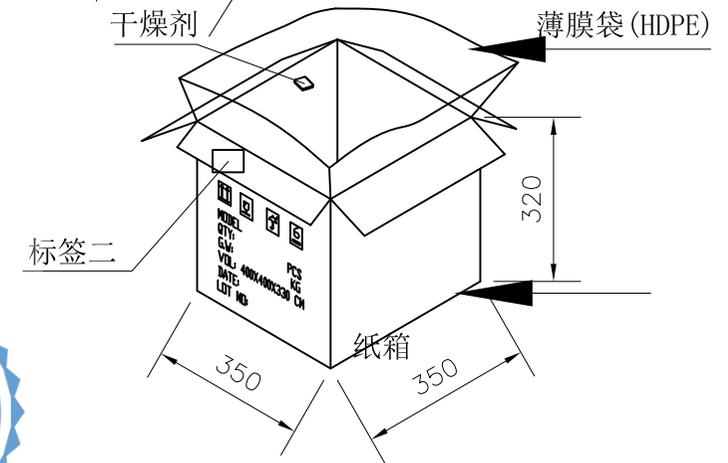

标签二

纸箱

包材名称	材料及厚度 (mm)	规格 (mm)
PJ35A028 载带	P.S(白色透明)T=0.30	12500X24.00X4.50
载盘	HI P.S(蓝色)	ø330X28.40
自粘带	PET(白色透明)	W=21.30 T=0.06
PE-375X450X0.06-A	PE(白色透明)	450X375X0.06
ZK-350X350X320-A	K=K t=4	350X350X320
三角板	A=A+ t=4	260X300



备注:

1. 每箱内必须放干燥剂;
2. 每箱必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 条码+二维码标签和交货标签按客户要求制作;

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
PDWG.NO: 0076-1	DR. SGF	23/05/02	NAME: 3.5耳机座 有头 沉板1.4 六脚贴片 全金 正编带 (PJ35A028-F06G1BR-A) APPD. JM_Zheng 23/05/02 CHKD. LYX 23/05/02 PJ. NO.: PJ.01.21-01-3005 SIZE: A4 DRW NO.: FINISH: SEE NOTES MAT'L.: SEE NOTES SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1