


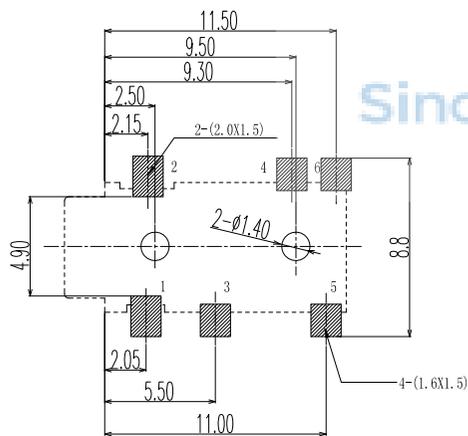





REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0			2023 20/04	


- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N(3.00kgf) MAX.;
- CONNECTOR UNMATING FORCES: 3N(0.30kgf) MIN.;




3D VIEW

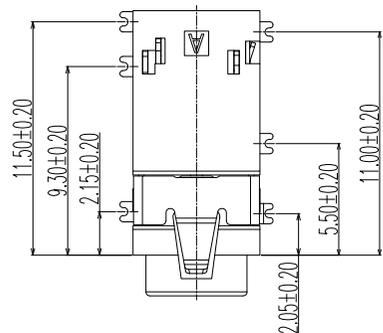

P.C.B LAYOUT
TOP VIEW

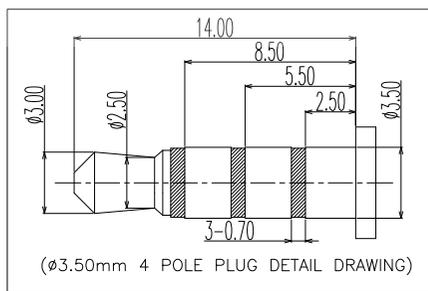

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

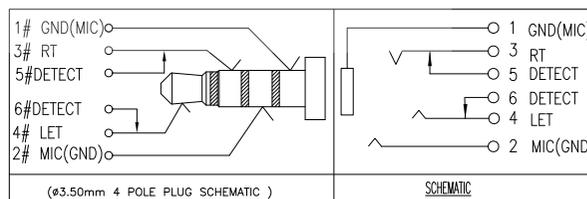

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
7	HOUSING	1	PA9T COLOR BLACK	
6	TERMINAL 6#	1	BRASS; THE BOTTOM OF THE NICKEL;GOLD PLATING ON SOLDER AREA ;	T=0.25mm
5	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.25mm
4	TERMINAL 4#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.25mm
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20mm
2	TERMINAL 2#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.25mm
1	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.	T=0.25mm

THIS DOCUMENT IS THE
SOLE PROPERTY OF
BBJconn Technology Co.,Ltd.
Corporation AND SHOULD
NOT BE USED IN WHOLE
OR IN PART WITHOUT
PRIOR WRITTEN PERMISSION.

BBJconn 深圳市步步精科技有限公司

.X: ±0.38 X': ±3'
.XX: ±0.25 .X': ±2'
.XXX: ±0.13 .XX': ±1'

NAME:
3.5耳机座 有头 六脚贴片 带柱 四节 (PJ35A051-F06G1BR-B)

APPD. JM_Zheng 23/05'02

PJ. NO.: PJ.01.22-01-3011
SIZE: A4 DRW NO.:

CHKD. LYX 23/05'02

FINISH: SEE NOTES MAT'L.: SEE NOTES

PDWG.NO: 0076-1 DR. SGF 23/05'02

SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/1

