



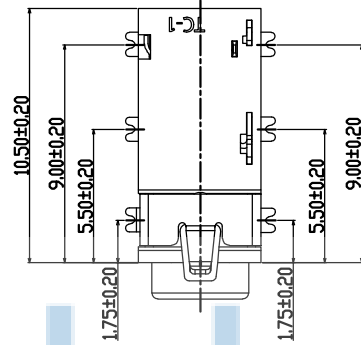



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0			2023 20/04	




3D VIEW




SCHEMATIC

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100 mΩ MAX.;
- INSULATION RESISTANCE: 1000Ω MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
- CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

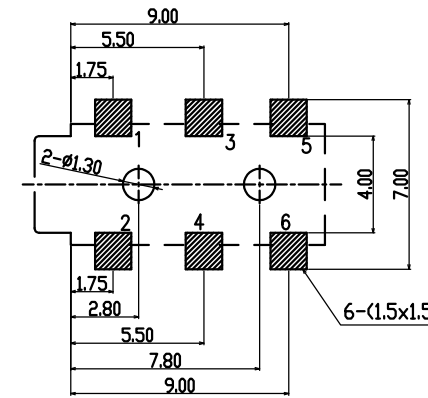

P.C.B. LAYOUT
TOP VIEW

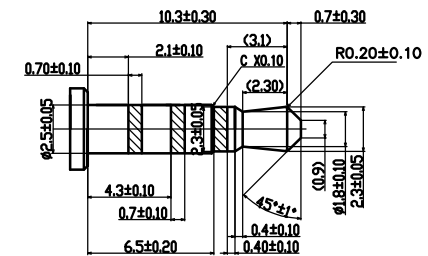

(Ø2.50mm 4 POLE PLUG DETAIL DRAWING)




ITEM	NAME	Q'TY	DESCRIPTION	
7	HOUSING	1	PA9T COLOR BLACK	Ni40 μ", AuG/F
6	TERMINAL 6#	1	PHOSPHOR BRONZE(C5191); NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	
5	TERMINAL 5#	1	PHOSPHOR BRONZE(C5191); NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	
4	TERMINAL 4#	1	STAINLESS STEEL(sus304); NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	
3	TERMINAL 3#	1	STAINLESS STEEL(sus304); NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	
2	TERMINAL 2#	1	PHOSPHOR BRONZE (C5191); NICKEL UNDER PLATING OVERALL, GOLD FLASH PLATING ON SOLDER AREA; GOLD FLASH PLATING ON CONTACT AREA	
1	TERMINAL 1#	1	PHOSPHOR BRONZE (C5210); THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING	


THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd.		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' XX': ±1'		NAME: 2.5耳机座 有头 双柱 6PIN 全贴 半金	
NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		APPD. JM_Zheng		23/05'02		PJ. NO.: PJ.01.12-01-3001	
PDWG.NO: 0076-1		CHKD. LYX		23/05'02		SIZE: A4 DRW NO.:	
DR. SGF		23/05'02		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A		REV.: A3	
				UNIT: mm		PAGE: 1/1	

1载带=1000PCS

1外箱=1000PCSX10盘载带=10000PCS


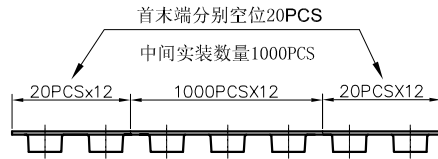


* 载带包装时请依此引出方向为标准

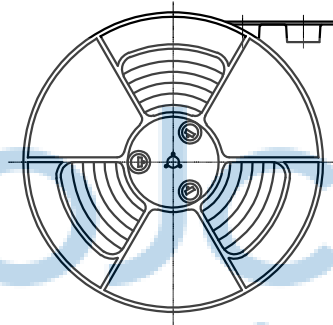


卷盘包装示意

包材名称	材料及厚度(mm)	规格(mm)
PJ25A001 载带	P.S(白色透明)T=0.30	12500X24.00X5.10
载盘	HI P.S(蓝色)	ø330X28.40
自粘带	PET(白色透明)	W=21.30 T=0.06
PE-375X450X0.06-A	PE(白色透明)	770X750X0.035
ZK-400X400X330-A	K=K t=4	350X340X330
三角板	A=A+ t=4	260X300

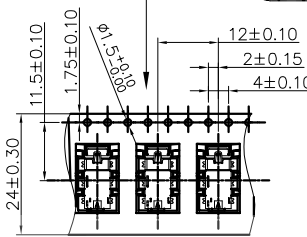

PJ25A001 载带图纸

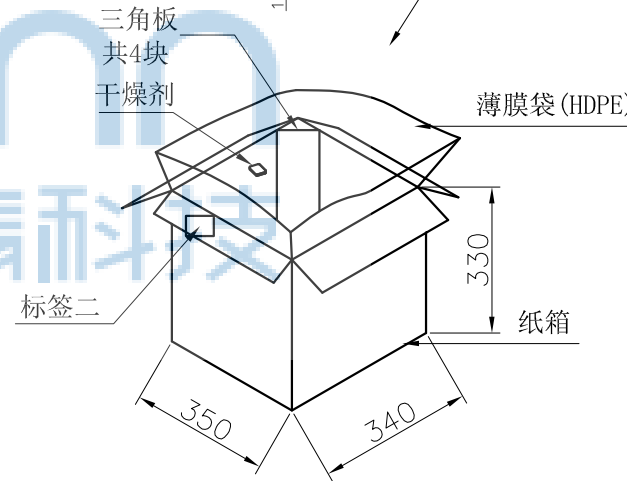

备注:

1. 每箱内必须放干燥剂;
2. 每箱必须用PE带密封包装;
3. 参考《高温材料管理规定》进行作业;
4. 我司标准格式标签或标签按客户要求制作;



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. PDWG.NO: 0076-1		深圳市步步精科技有限公司					
		.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X': ±3' X'': ±2' XX': ±1'		NAME: 2.5耳机座 有头 双柱 6PIN 全贴 半金	
	APPD.	JM_Zheng	23/05'02		PJ. NO.: PJ.01.12-01-3001		
	CHKD.	LYX	23/05'02		SIZE: A4 DRW NO.:		
				FINISH: SEE NOTES		MAT'L.: SEE NOTES	
				SCALE: N/A	REV.: A3	UNIT: mm	PAGE: 1/1