


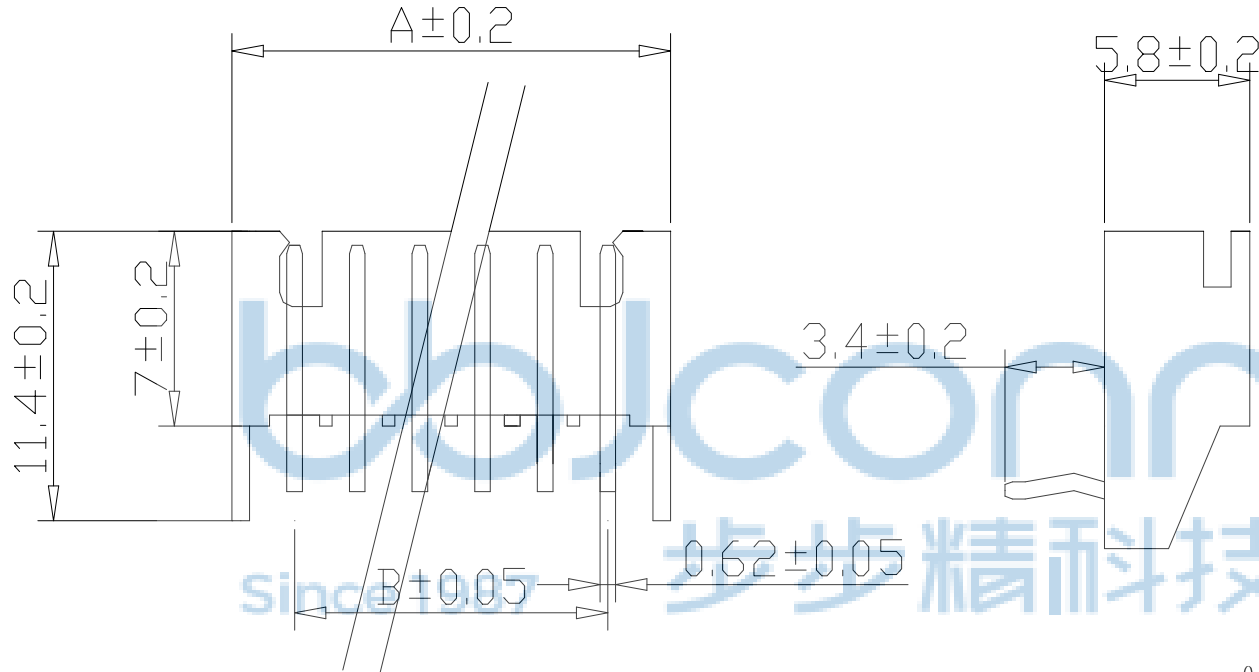

使用温度范围 (Ambient temperature Range):-25° ~+85°

适用线规 (Applicable Wires):AWG 28#~22#

适用基板厚度 Applicable PCboard thickness):1.6mm

额定电压 (Voltage rating):250V AC,DC

额定电流 (Current rating):3A

接触电阻 Contact Resistance): ≤0.02 Ω

绝缘电阻 (Insulation Resistance): ≥1000M Ω


耐压 (Withstand Voltange):1000V/min

材料 (Material)

1. 基座: PA66 94V-0

2. 插针: 黄铜

孔位	A	B
2	7.5	2.5
3	10	5.0
4	12.5	7.5
5	15.0	10.0
6	17.5	12.5
7	20.0	15.0
8	22.5	17.5
9	25.0	20.0
10	27.5	22.5
11	30.0	25.0
12	32.5	27.5
13	35.0	30.0
14	37.5	32.5
15	40.0	35.0


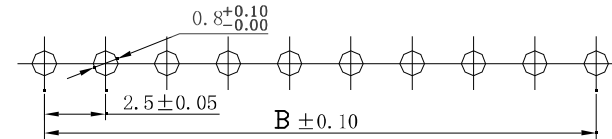


P.C.B LAYOUT



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		.X: ±0.38 .X': ±3" .XX: ±0.25 .X": ±2" .XXX: ±0.13 .XX": ±1"		NAME: XH-2AWD (2.54-2P) 弯针 打K脚 带定位 白色	
APPD. JM_Zheng		P.J. NO.: WT.02.12-41-1005		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES		MAT'L.: SEE NOTES	
PDWG.NO: 0102-1		DR. SGF		SCALE: N/A REV.: A0	
		UNIT: mm		PAGE: 1/2	

PE袋规格:***X*** (以实际出货为准)

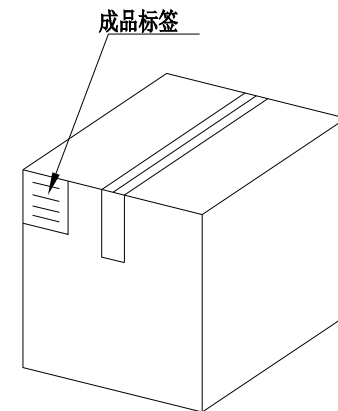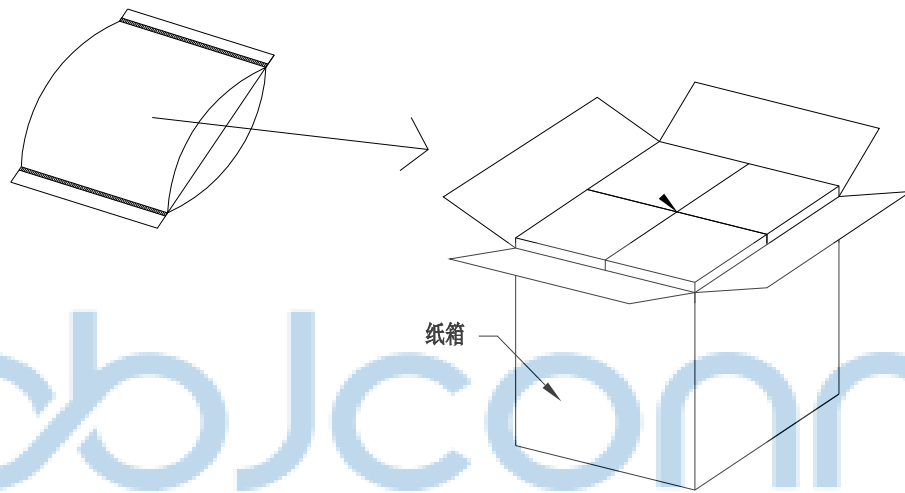

1. 包装要求:

- 1.1 每PE袋包装 2000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计40000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"	
APPD.	JM_Zheng	NAME: XH-2AWD (2.54-2P) 弯针 打K脚 带定位 白色	
CHKD.	LYX	PJ. NO.: WT.02.12-41-1005	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0102-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	