

REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0				

使用温度范围 (Ambient temperature Range):-25° ~+85°

适用基板厚度 Applicable PCboard thickness):1.6mm

额定电压 (Voltage rating):250V AC,DC

额定电流 (Current rating):3A

接触电阻 Contact Resistance): 0.02


绝缘电阻 (Insulation Resistance): 1000M

耐压 (Withstand Voltange):1000V/min

材料 (Material)

1. 基座: PA66 FV2

2. 插针: 黄铜

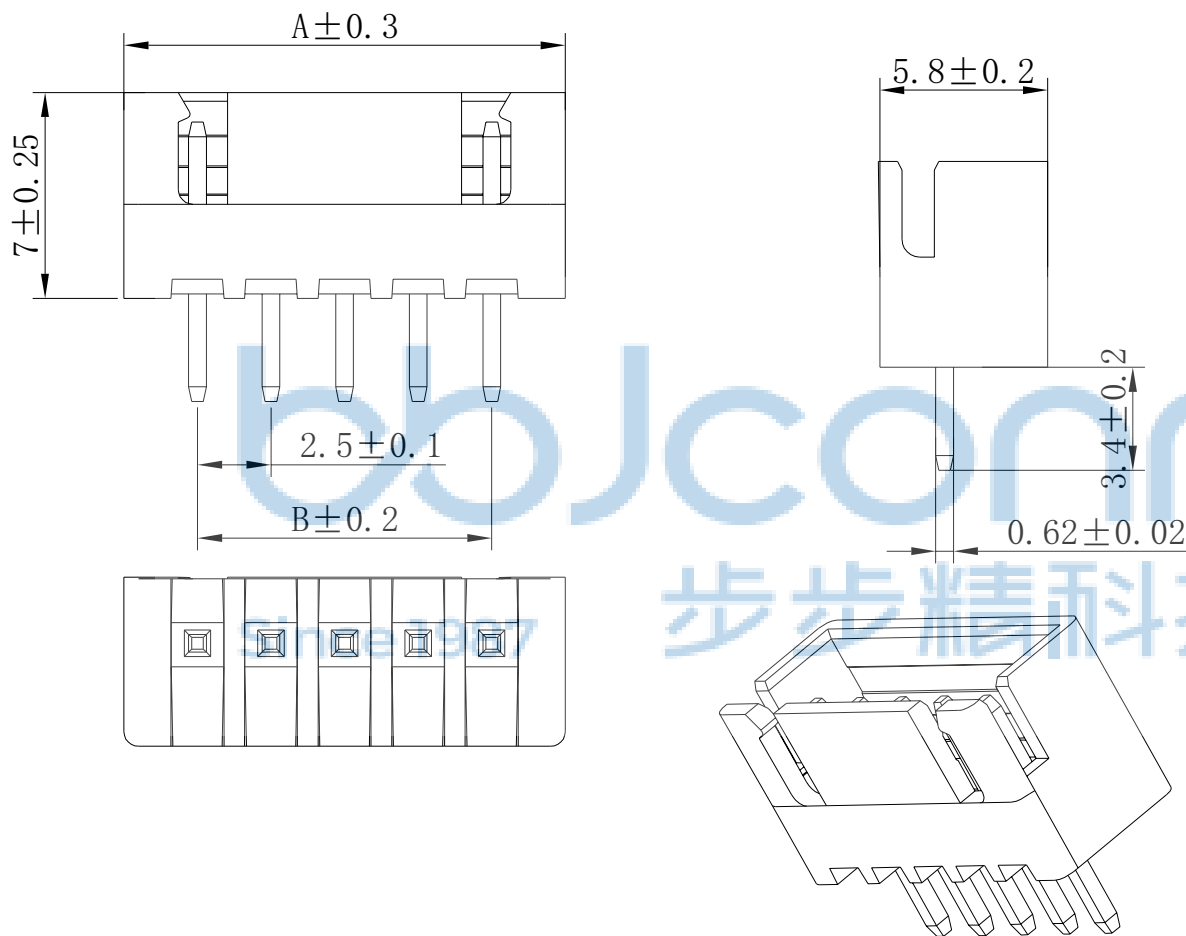


孔位	A	B
2	7.5	2.5
3	10	5.0
4	12.5	7.5
5	15.0	10.0
6	17.5	12.5
7	20.0	15.0
8	22.5	17.5
9	25.0	20.0
10	27.5	22.5
11	30.0	25.0
12	32.5	27.5
13	35.0	30.0
14	37.5	32.5
15	40.0	35.0
16	42.5	37.5

公差	>0-3	>3-18	>18-50	>50-100
范围	±0.15	±0.2	±0.3	±0.5
材料	PA66 94V- 2 (0) or ul			




THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: XH-14A (2.54-14P) 直针 米色	
X*: ±3* .X*: ±2* .XX*: ±1*		PJ. NO.: WT.02.61-11-1013	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES	
DR. SGF		MAT'L.: SEE NOTES	
PDWG.NO: 0102-1		SCALE: N/A REV.: A0	
		UNIT: mm PAGE: 1/2	

PE袋规格:***X*** (以实际出货为准)

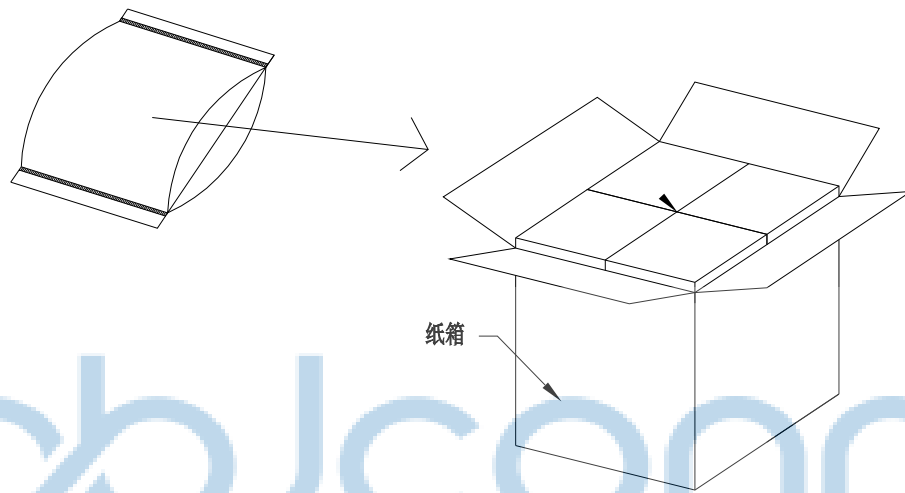

成品标签



1. 包装要求: Since 1987

- 1.1 每PE袋包装 1000pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司		NAME: XH-14A (2.54-14P) 直针 米色	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" .X*: ±2" .XX*: ±1"		PJ. NO.: WT.02.61-11-1013	
APPD.		JM_Zheng		SIZE: A4 DRW NO.:	
CHKD.		LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG.NO: 0102-1		DR. SGF		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	