

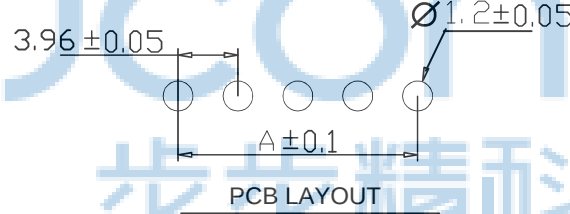



REV.	ECN NO	CONTENT	DATE	ENGINEER
A0				

使用温度范围 (Ambient temperature Range): $-25^{\circ} \sim +85^{\circ}$
适用线规 (Applicable Wires): AWG 22#~18#
适用基板厚度 (Applicable PCboard thickness): 1.6mm
额定电压 (Voltage rating): 250V AC, DC
额定电流 (Current rating): 5A
接触电阻 (Contact Resistance): $\leq 0.01 \Omega$
绝缘电阻 (Insulation Resistance): $\geq 1000M \Omega$
耐压 (Withstand Voltange): 1000V/min
材料 (Material)
1. 基座: PA66 FV2
2. 插针: 黄铜

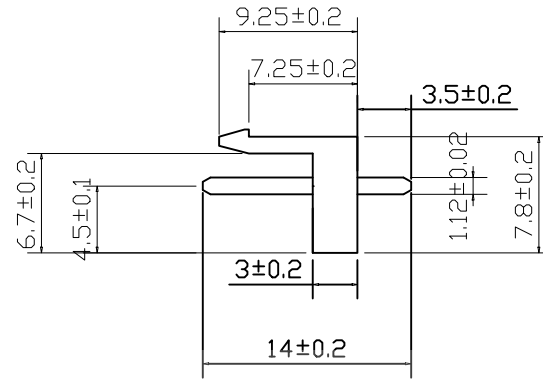


孔位	A	B
2	3.96	7.96
3	7.92	11.92
4	11.88	15.88
5	15.84	19.84
6	19.80	23.80
7	23.76	27.76
8	27.72	31.72
9	31.68	35.68
10	35.64	39.64
11	39.6	43.60
12	43.56	47.56
13	47.52	51.52
14	51.48	55.48
15	55.44	59.44

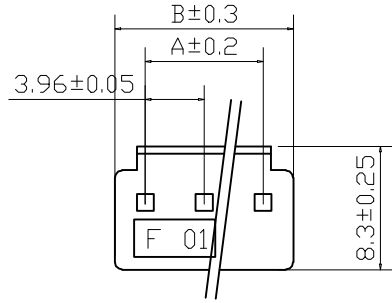


范围	>0-3	>3-18	>18-50	>50-100
公差	±0.15	±0.2	±0.3	±0.5

THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co., Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		NAME: VH-3A2 (3.96-3P) 中间空1P 直针 米黄色	
X': ±3' .X': ±2' .XX': ±1'		PJ. NO.: WT.03.61-11-1004	
APPD. JM_Zheng		SIZE: A4 DRW NO.:	
CHKD. LYX		FINISH: SEE NOTES MAT'L.: SEE NOTES	
PDWG. NO: 0102-1		SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2	

PE袋规格:***X*** (以实际出货为准)

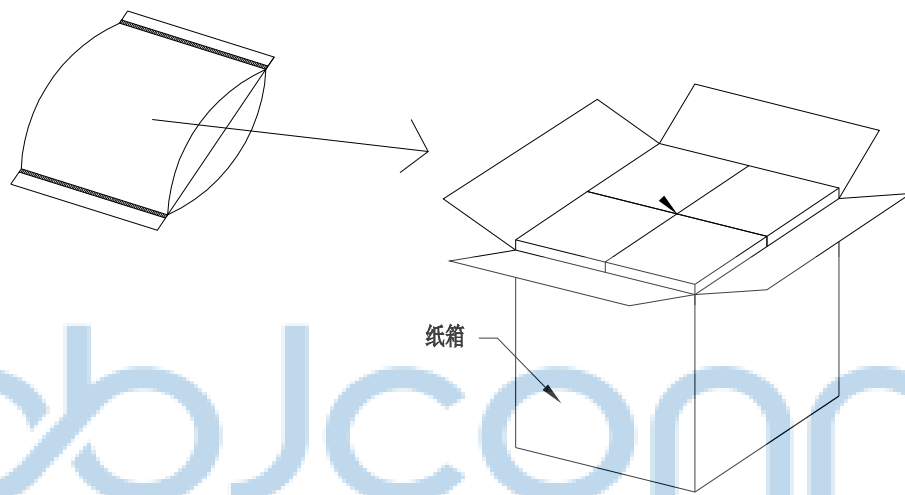

成品标签



1. 包装要求:

- 1.1 每PE袋包装 1000 pcs;
- 1.2 每1袋放一小纸盒;
- 1.3 每20个小纸盒放一个纸箱, 共计20000PCS
- 1.4 纸箱外贴上标签



THIS DOCUMENT IS THE SOLE PROPERTY OF BBJconn Technology Co.,Ltd. Corporation AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 深圳市步步精科技有限公司	
.X: ±0.38 .XX: ±0.25 .XXX: ±0.13		X*: ±3" X*: ±2" XX*: ±1"	
APPD.	JM_Zheng	NAME: VH-3A2 (3.96-3P) 中间空1P 直针 米黄色	
CHKD.	LYX	PJ. NO.: WT.03.61-11-1004	
DR.	SGF	SIZE: A4 DRW NO.:	
PDWG.NO: 0102-1		FINISH: SEE NOTES MAT'L.: SEE NOTES	
		SCALE: N/A REV.: A0 UNIT: mm PAGE: 2/2	